

# Modicon X80 I/O platform

Catalog  
July 2018



**Schneider**  
 **Electric**

# Quick access to Product information

## Select your Catalog, your Training



With just 3 clicks, you can reach the 7,000 pages of the Industrial Automation & Control catalog, in both English and French.

- Digi-Cat is available on a USB key (for PC). To get your Digi-Cat, please contact your local center
- Download Digi-Cat from this address:

<http://digi-cat.schneider-electric.com/download.html>



### Find your training

- Find the right training for your needs
- Locate the training center with the selector tool, using this address:

<http://www.schneider-electric.com/b2b/en/services/training/technical-training.jsp>

then click on

Find your  
training center



Life Is On

Schneider  
Electric

# General contents

|   |   |
|---|---|
| Presentation . . . . .                      | 1 |
| Racks and power modules . . . . .           | 2 |
| I/O modules . . . . .                       | 3 |
| Safety I/O and power modules . . . . .      | 4 |
| Communication . . . . .                     | 5 |
| Ruggedized modules . . . . .                | 6 |
| Compatibility with OsiSense XU/XS . . . . . | 7 |
| Standards and certifications . . . . .      | 8 |
| Services, index. . . . .                    | 9 |

In this catalog, each time words which refer to Safety without precision, must be understood according to "Functional Safety": IEC61508 & IEC61511.



---

|  |          |
|--|----------|
| ■ General presentation.....                  | page 1/2 |
| ■ Composition .....                          | page 1/6 |
| ■ Architectures, software configuration..... | page 1/7 |
| ■ Compatibility.....                         | page 1/8 |

# Modicon X80 I/O platform

## Compact, robust, sustainable

1

### Modicon X80 I/O, a new Remote I/O system

The Modicon X80 I/O platform serves as a common platform for Modicon M340, Modicon Quantum Ethernet I/O, Modicon M580 PACs, and future Modicon Mx80 controllers. With a common platform, a much smaller stock of spare parts needs to be held, and maintenance and training costs are significantly reduced. A common configuration tool is used for all PAC modules using Unity Pro with a high level of services such as bit forcing, structured device DDT, etc. This platform offers a wide choice between several Schneider Electric I/O modules (discrete, analog, expert, communication).



Common I/O platform for  
Modicon M340, M580, Quantum  
Ethernet I/O

#### Compact

- > With the latest I/O technology, the Modicon X80 I/O platform is extremely compact
- > Reduction in cabinet dimensions, with up to 64 discrete I/O for some modules



Modicon X80 I/O platform



ATEX and IECEx zone 2/22

#### Robust

- > Offering more than required by the standards
- > Certified for Hazardous Location Class I Division 2 Groups ABCD and for ATEX/IECEx zone 2/22 (depending on the model, see pages 8/2 to 8/9)

| Characteristics                          | Modicon X80 I/O platform | IEC standards<br>Values required by |
|--|--------------------------|-------------------------------------|
| <b>Mechanical constraints</b>            | <b>Levels reached</b>    | <b>IEC 60068-2</b>                  |
| Shock                                    | 30 g                     | > 15 g                              |
| Vibrations                               | 3 g                      | > 1 g                               |
| <b>Electrical immunity</b>               | <b>Levels reached</b>    | <b>IEC 61131-2</b>                  |
| Radiated field                           | 15 V/m                   | > 10 V/m                            |
| Electrostatic discharges by contact      | 6 kV                     | > 4 kV                              |
| <b>Environmental immunity</b>            | <b>Working values</b>    | <b>IEC 61131-2</b>                  |
| Temperature                              | 0...60 °C/32...140 °F    | > 5...55 °C/41...131 °F             |
| Modicon X80 ruggedized I/O offer         | -25...70 °C/32...158 °F  | > 5...55 °C/41...131 °F             |
| Corrosive environments (coated versions) |                          | Class Gx, 3C4, Kb, 3S4, 3B2         |



#### Sustainable

- > Common X80 I/O modules reduce training and maintenance costs
- > Hot swappable
- > Existing solutions for migrating from legacy I/O to the Modicon X80 I/O platform
- > Green Premium Eco Label



Common I/O platform

### M580 Safety Standalone



Clear distinction between safety and process

### Regulatory requirements


Good practices dictate that control systems must be designed to keep process control functions separate and operationally independent from safety functions. This is usually done using a controller for the process and a separate system for safety.

### Our solution offers more than required by industry standards

- > Dual processing capability to control safety and process functions independently
- > Unifying independent plant safety and process control to protect the entire operating environment
- > Minimized impact of standard process failure on plant safety, its people and assets

### No compromise for a safe running process

- > Best-in-class Modicon M580 performance, networking and cybersecurity
- > No need to design, install and maintain separate safety systems
- > Same tools, wiring methods and I/O structures as Modicon M580 controller

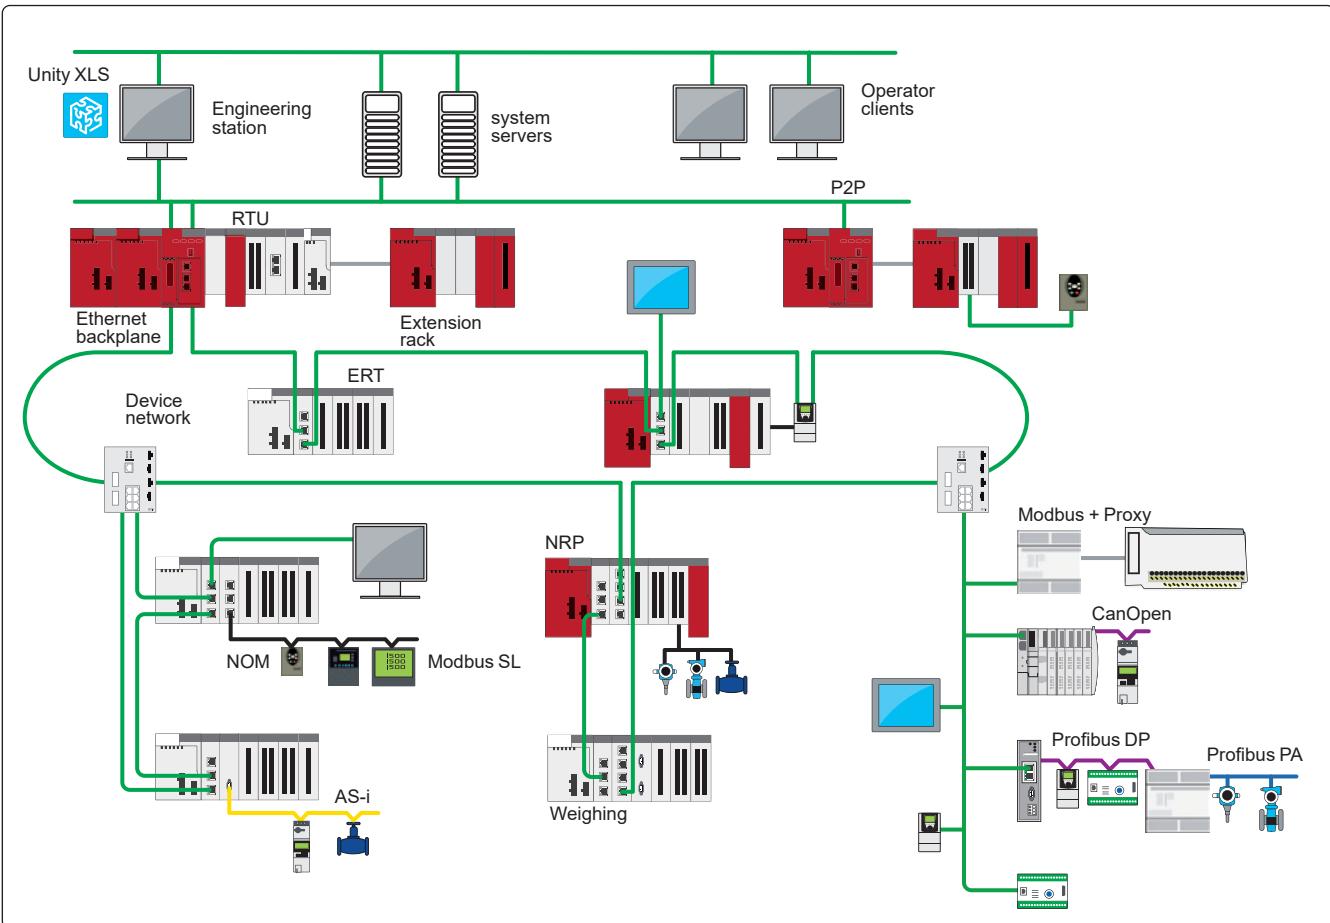

Typical Common Safety architecture with Modicon M580 Safety



Mix standard process and safety in a single M580 safety project



### Certifications and standards

Depending on the model, Modicon X80 modules respect the following standards:

- > Merchant navy: IACS E10 and agencies: ABS, BV, DNV, GL, LR, RINA, RMRS and CCS
- > International certification: CE, UL, CSA, RCM, EAC
- > Power generation market: IEC 61000-6-5, IEC 61850-3

For further information, see pages 8/2 to 8/9.

#### Merchant navy



ABS



BV



DNV.GL



LR



RINA



RMRS



CHINA CLASSIFICATION SOCIETY

中國船級社

CCS

#### International certifications



CE



UL



CSA



RCM



EAC



High level Unity services





### Market segments

> The Unity Pro function block software libraries make the Modicon X80 I/O platform ideally suited for the following market segments:



Water & waste water



Mining, minerals &  
metals



Food & beverage



Oil & gas



Simplified offer from small to large applications





Modicon X80 I/O platform with Modicon M580 processor




Modicon X80 I/O platform with Modicon M340 processor



Modicon X80 EIO drop with CRA bus terminal module



Ethernet Modbus/TCP DIO drop with PRA module

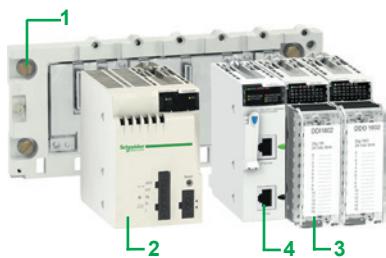

## Presentation

The Modicon X80 I/O platform serves as the common base for automation platforms by simply adding a dedicated processor (1).

It may also:

- form part of a Quantum and Modicon M580 Ethernet I/O architecture as an Ethernet RIO (EIO) drop with a CRA bus terminal module
- form an Ethernet Modbus/TCP DIO drop with a PRA module

The Modicon X80 I/O platform is available in single-rack or multi-rack configuration.

This platform may also accept automation platform-dedicated modules (communication, application-specific, etc.).

One Modicon X80 drop may support two racks separated by a cumulative distance of up to 30 m/98.42 ft.

This platform, common to several automation platforms, can reduce maintenance and training costs as it comprises:

- a single range of spare parts in stock
- training common to several PLCs

Based on the latest I/O technology, the Modicon X80 I/O platform offers:

- high-quality ruggedness and compactness
- compliance with international certifications (ATEX, IEC, etc.)
- a wide selection of modules: discrete or analog I/O, expert modules, communication modules, etc.

This platform is programmed and configured using Unity Pro software.

Bit forcing simplifies simulation and structured data simplifies diagnostics.

## Description

### Modicon X80 I/O platform

The Modicon X80 I/O platform, which can be used in-rack and/or in remote I/O drops (RIO), Ethernet remote I/O drops (EIO), and/or distributed I/O drops (DIO) depending on the type of PLC (M580, M340, Quantum, etc.), comprises the following elements:

- 1 X-bus racks with 4, 6, 8, or 12 slots or Ethernet + X-bus racks with 4, 8, or 12 slots for single power supply, and Ethernet + X-bus racks with 6 or 10 slots for dual power supply
- 2 AC or DC power supply modules
- 3 discrete and analog I/O modules
- 4 RTU (Remote Terminal Unit) serial link, AS-Interface, and other communication modules



The additional modules offered include:

- Ethernet (Modbus/TCP, Ethernet/IP) and CANopen master communication and supplementary modules dedicated to several automation platforms such as Modicon M340 or Modicon M580
- Ethernet Global Data module specifically designed to provide the Global Data service for inter-controller communication
- communication via fiber optic transceiver modules
- application-specific modules: counter, motion control, SSI encoder, time stamping, frequency input
- CAPP (Collaborative Automation Partner Program) partner modules: weighing, Wi-Fi

### Treatment for harsh environments

With "ruggedized" modules, the Modicon X80 I/O platform may be used in harsh environments or within a range of operating temperatures from - 25 to + 70 °C/- 13 to + 158 °F (see page 6/2).

(1) See the compatibility guide on page 1/8.



### Architectures based on the Modicon X80 I/O platform

**Single-rack or multi-rack local I/O configuration with Modicon M580 or M340 processor**

This configuration comprises:

- a Modicon X80 I/O primary rack with a Modicon M580 or M340 processor
- a Modicon X80 I/O secondary rack

This configuration may comprise 4 racks with **BMXP342●●●** processors separated by a maximum cumulative distance of 30 m/98.42 ft. It can comprise up to 7 racks with M580 processors.



Quantum Ethernet I/O with Modicon X80 EIO drop


### Quantum Ethernet I/O with Modicon X80 EIO drop

This architecture comprises:

- a Quantum Ethernet I/O platform comprising a processor and a CRP Ethernet head adapter
- one or more Modicon X80 EIO drops with a standard or performance CRA drop adapter

This configuration may include:

- 16 drops with **140CPU6●1●●** processors
- 31 drops with **140CPU6●2●●/140CPU6●8●●** processors




Modicon M580 platform with Modicon X80 EIO drop

### Modicon M580 with Modicon X80 EIO drop

This architecture comprises:

- a Modicon M580 automation platform comprising a processor and dedicated modules
- one or more Modicon X80 EIO drops with a standard or performance BMXCRA drop adapter on an X-bus rack or
- one or more Modicon X80 EIO drops with a BMECRA drop adapter on an Ethernet + X-bus rack

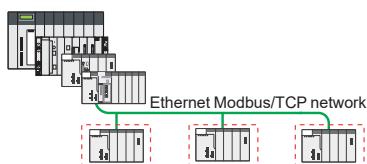

Ethernet Modbus/TCP DIO drop connected to an automation system platform

### Ethernet Modbus/TCP DIO drop connected to an automation system platform

This architecture comprises:

- a Quantum/Premium/M580/M340 automation platform
- one or more Ethernet Modbus/TCP DIO drops with a **BMXPRA0100** peripheral I/O remote adapter, a power supply, and I/O



Unity Pro

### Software configuration

Unity Pro programming software is required to set up the Modicon X80 I/O platform.

The Unity Pro function block software libraries make it possible to meet the needs of specialist applications in various fields of application such as:

- Water and Waste Water (WWW)
- Food & Beverage (F&B)
- Mining, Minerals, Metals (MMM)
- Oil & Gas (O&G)

## **Modicon X80 I/O platform**

Product compatibility according to network architecture

| Product type   | X80 module reference | Short description of X80 module         | M340 | M580                      |   |                           |   |
|----------------|----------------------|---|------|---------------------------|---|---------------------------|---|
|                |                      |   |      | Local rack with CPU       |   |                           |   |
|                |                      |   |      | Standalone                |   | HSBY                      |   |
|                |                      |   |      | X-bus rack<br>BMXXBP••••• | X-bus +<br>Ethernet rack<br>BMEXBP••••• | X-bus rack<br>BMXXBP••••• | X-bus +<br>Ethernet rack<br>BMEXBP••••• |
| Power supplies | BMXCPS2000           | Power supply                            |      |                           |   |                           |   |
|                | BMXCPS2010           | Power supply                            |      |                           |   |                           |   |
|                | BMXCPS3020 (H)       | Power supply                            |      |                           |   |                           |   |
|                | BMXCPS3500 (H)       | Power supply                            |      |                           |   |                           |   |
|                | BMXCPS3540T          | Power supply                            |      |                           |   |                           |   |
|                | BMXCPS4002 (H)       | Redundant power supply                  |      |                           |   |                           |   |
| Backplanes     | BMXXBP0400 (H)       | X-bus backplane                         |      |                           |   |                           |   |
|                | BMXXBP0600 (H)       | X-bus backplane                         |      |                           |   |                           |   |
|                | BMXXBP0800 (H)       | X-bus backplane                         |      |                           |   |                           |   |
|                | BMXXBP1200 (H)       | X-bus backplane                         |      |                           |   |                           |   |
|                | BMXXBE1000 (H)*      | X-bus rack expansion module             |      |                           |   |                           |   |
|                | BMXXBE2005           | X-bus rack expansion kit                |      |                           |   |                           |   |
|                | BMEXP0400 (H)        | X-bus+Eth backplane                     |      |                           |   |                           |   |
|                | BMEXP0800 (H)        | X-bus+Eth backplane                     |      |                           |   |                           |   |
|                | BMEXP1200 (H)        | X-bus+Eth backplane                     |      |                           |   |                           |   |
|                | BMEXP0602 (H)*       | X-bus+Eth dual power supplies backplane |      |                           |   |                           |   |
|                | BMEXP1002 (H)*       | X-bus+Eth dual power supplies backplane |      |                           |   |                           |   |
| I/O            | BMXXEM010            | Protective cover                        |      |                           |   |                           |   |
|                | BMXAMI0410 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMI0800           | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMI0810 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMM0600 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMO0210 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMO0410 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXAMO0802           | Analog I/O                              |      |                           |   |                           |   |
|                | BMXART0414 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXART0814 (H)       | Analog I/O                              |      |                           |   |                           |   |
|                | BMXDAI0805           | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI1602 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI1603 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI1604 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI1614 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI1615 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAI0814           | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAO1605 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDAO1615 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDI1602 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDI1603 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDI1604T          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDI3202K          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDI6402K          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDM16022 (H)      | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDM16025 (H)      | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDM3202K          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDO1602 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDO1612 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDO3202K          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDDO6402K          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDRA0804T          | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDRA0805 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDRA0815 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDRA1605 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMXDRC0805 (H)       | Discrete I/O                            |      |                           |   |                           |   |
|                | BMEAHI0812           | HART I/O                                |      |                           |   |                           |   |
|                | BMEAHO0412           | HART I/O                                |      |                           |   |                           |   |

## Compatible      Not compatible



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

 More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)



# Modicon X80 I/O platform

Product compatibility according to network architecture

| 1                     | Product type   | X80 module reference               | Short description of X80 module | M340 | M580                  |                                  |                       |                                  |
|-----------------------|----------------|------------------------------------|---------------------------------|------|-----------------------|----------------------------------|-----------------------|----------------------------------|
|                       |                |                                    |                                 |      | Local rack with CPU   |                                  |                       |                                  |
|                       |                |                                    |                                 |      | Standalone            |                                  | HSBY                  |                                  |
|                       |                |                                    |                                 |      | X-bus rack BMXXBP•••• | X-bus + Ethernet rack BMEXBP•••• | X-bus rack BMXXBP•••• | X-bus + Ethernet rack BMEXBP•••• |
| Expert modules        | BMXEAE0300 (H) | SSI encoder                        |                                 |      |                       |                                  |                       |                                  |
|                       | BMXEHC0200 (H) | Counter                            |                                 |      |                       |                                  |                       |                                  |
|                       | BMXEHC0800 (H) | Counter                            |                                 |      |                       |                                  |                       |                                  |
|                       | BMXERT1604T    | Time stamping                      |                                 |      |                       |                                  |                       |                                  |
|                       | BMXMSP0200     | PTO                                |                                 |      |                       |                                  |                       |                                  |
|                       | BMXETM0200H    | Frequency input                    |                                 |      |                       |                                  |                       |                                  |
|                       | PMXCDA0400     | AIDIAG (M340 + M580)               |                                 |      |                       |                                  |                       |                                  |
|                       | PMESWT0100     | Weighing                           |                                 |      |                       |                                  |                       |                                  |
| Communication modules | BMXNOC0401     | Ethernet                           |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNOE0100 (H) | Ethernet                           |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNOE0110 (H) | Ethernet                           |                                 |      |                       |                                  |                       |                                  |
|                       | BMENOC0301 (C) | Ethernet standard web server       |                                 |      |                       |                                  |                       |                                  |
|                       | BMENOC0311 (C) | Ethernet FC web server             |                                 |      |                       |                                  |                       |                                  |
|                       | BMENOC0321 (C) | Ethernet Control router            |                                 |      |                       |                                  |                       |                                  |
|                       | BMENOS0300 (C) | eDRS switch                        |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNGD0100     | Ethernet Global Data services      |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNOM0200 (H) | Serial                             |                                 |      |                       |                                  |                       |                                  |
|                       | BMENOP0300 (C) | IEC 61850                          |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNOR0200H    | RTU                                |                                 |      |                       |                                  |                       |                                  |
|                       | BMXEIA0100     | ASI                                |                                 |      |                       |                                  |                       |                                  |
|                       | BMECXM0100 (H) | CANopen Master                     |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNRP0200     | Optical transceiver                |                                 |      |                       |                                  |                       |                                  |
|                       | BMXNRP0201     | Optical transceiver                |                                 |      |                       |                                  |                       |                                  |
|                       | PMEUCM0202     | Ethernet TCP open universal module |                                 |      |                       |                                  |                       |                                  |
|                       | PMXNOW0300     | Wireless                           |                                 |      |                       |                                  |                       |                                  |

Compatible Not compatible

| M580                                     |  |             |      | Quantum Ethernet I/O             |  |                       |  | M340 + M580 + Quantum + Premium  |  |
|--|--|-------------|------|----------------------------------|--|-----------------------|--|----------------------------------|--|
| X80 drops on Ethernet remote I/O         |  |             |      | X80 drops on Ethernet remote I/O |  |                       |  | X80 drops on distributed I/O     |  |
| Standalone or HSBY X-bus rack BMXXBP•••• |  | Standalone  | HSBY | X-bus + Ethernet rack BMEXBP•••• |  | X-bus rack BMXXBP•••• |  | X-bus + Ethernet rack BMEXBP•••• |  |
| BMXCRA31200                              |  | BMXCRA31210 |      | BMECRA31210                      |  | BMXCRA31200           |  | BMXCRA31210                      |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |
|  |  |             |      |                                  |  |                       |  |                                  |  |



---

### Single-rack configuration

- Presentation, description, reference ..... page 2/2
- Accessories ..... page 2/5

### Multi-rack configuration

- Presentation, description ..... page 2/6
- References ..... page 2/8

### Power supply modules

- Presentation, description, function ..... page 2/10
- References ..... page 2/11

### Presentation

The Modicon X80 I/O platform is compatible with two types of backplanes: dual Ethernet and X-bus backplanes or X-bus backplanes (1). One Ethernet switch is embedded inside the backplane with connectivity to some slots on the backplane, and not all slots have Ethernet connectivity.

The X-bus functionality is preserved and conforms to the legacy implementation and specification. The X-bus will be used in a subset of modules on the Ethernet backplane.

The backplanes provide power supply for the modules in the rack.

**BMXXBP●●00** racks are basic elements in Modicon X80 I/O platform single-rack and multi-rack configurations. They provide a rack number to X-bus slots. They also perform the following functions:

- Mechanical function: they are used to install modules in a PLC station (power supply, processor, discrete, analog and application-specific I/O). These racks can be mounted on a panel, plate or DIN rail:
  - Inside enclosures
  - On machine frames, etc.
- Electrical function: the racks incorporate X-bus (proprietary bus). They are used to:
  - Distribute the power supplies required for each module in the same rack
  - Distribute data and service signals for the entire PLC station
  - Hot swap modules during operation

**BMEXBP●●00** provide the following services to X-bus slots:

- Provide rack number
- Provide interconnection to the slots in main and extended backplanes

**BMEXBP●●02** contain two CPS slots for two redundant power supplies, the dual power supply rack is:

- Compatible only with redundancy power supply
- Ensure security of power supply in high availability applications

The Ethernet interface is the main communication medium in the Ethernet backplane. The Ethernet modules on the Ethernet backplane are attached to one of several ports. The modules lead to the Ethernet switch chip embedded inside the Ethernet backplane.

The Ethernet backplane provides the following services to ETH slots:


- Provide ETH connection to ETH slots
- Provide point-to-point lane connection

### Description

#### X-bus backplanes


**BMXXBP●●00** racks are available in 4, 6, 8 or 12-slot versions and comprise:

- 1 A metal frame that performs the following functions:
  - Holds the X-bus electronic card and helps it withstand EMI and ESD type interference
  - Holds the modules
  - Gives the rack mechanical rigidity
- 2 An earth terminal for earthing the rack
- 3 4 holes (big enough for M6 screws) for mounting the rack on a frame
- 4 2 fixing points for the shielding connection bar
- 5 Tapped holes to take the locking screw on each module
- 6 A connector for a rack expansion module, marked **XBE**
- 7 40-way female 1/2 DIN connectors forming the electrical connection between the rack and each module, marked **CPS, 00...11** (the rack is delivered with each connector protected by a cover which needs to be removed before inserting the module)
- 8 Slots for anchoring the module pins

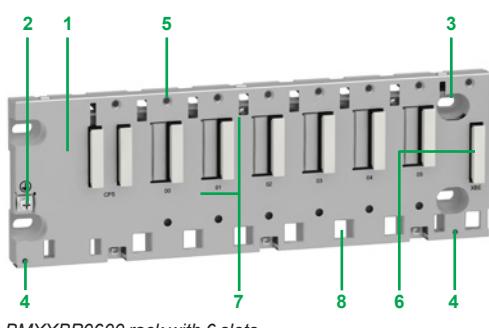

BMXXBP0600 rack with 6 slots

(1) Mandatory PV02 or later version.



BMEXBP0400 backplane


### Description (continued)

#### Dual Ethernet and X-bus backplanes

The quantity of X-bus and Ethernet slots found on a backplane depends on the backplane size.

The **BMEXBP0400/BMEXBP0800** are 4/8-slot dual Ethernet and X-bus backplanes with:


- 1 CPS slot for power supply
- 2 4 slots (**BMEXBP0400**) / 8 slots (**BMEXBP0800**) with:
  - 2a 4/8 Ethernet and X-bus connectors for mixed modules
  - 3 Extension: 1 connector for a X-bus backplane expansion
  - 4 2 fixing points for the shielding connection bar
  - 5 Protective earth screw
  - 6 Slots for anchoring the module pin
  - 7 Tapped holes for the locking screw on each module
  - 8 4 holes for M4, M5, M6 or UNC #6-32 screws (from 4.32 mm to 6.35 mm/0.170 to 0.250 in.)
- 9 Rack fastened to 35 mm/1.38 in. wide and 15 mm/0.59 in. deep DIN rails. Mounting on a 35 mm/1.38 in. wide and 7.5 mm/0.295 in. deep DIN rail is possible (in this case, the product withstands less mechanical stress).

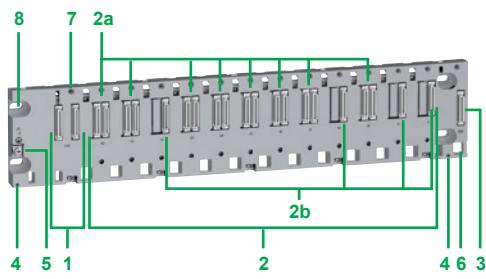

BMEXBP1200 backplane

The **BMEXBP1200** is a 12-slot dual Ethernet and X-bus backplane with:

- 1 CPS slot for power supply
- 2 12 slots with:
  - 2a 8 Ethernet and X-bus connectors for mixed modules
  - 2b 4 X-bus connectors for X-bus modules
  - 3 Extension: 1 connector for an X-bus backplane expansion
  - 4 2 fixing points for the shielding connection bar
  - 5 Protective earth screw
  - 6 Slots for anchoring the module pin
  - 7 Tapped holes for the locking screw on each module
  - 8 4 holes for M4, M5, M6 or UNC #6-32 screws (from 4.32 mm to 6.35 mm/0.170 to 0.250 in.)

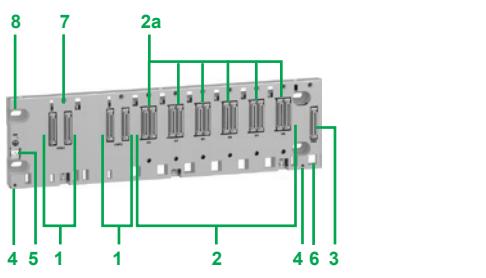

BMEXBP0602 backplane


#### Dual power supply backplanes

**BMEXBP0602** is 6-slot dual Ethernet and X-bus backplane with:

- 1 2 CPS slots for only redundancy power supply **BMXCP0400**
- 2 6 slots with:
  - 2a 6 Ethernet and X-bus connectors for mixed modules
  - 3 Expansion: 1 connector for an X-bus backplane expansion
  - 4 2 fixing points for the shielding connection bar
  - 5 Protective earth screw
  - 6 Slots for anchoring the module pin
  - 7 Tapped holes for the locking screw on each module
  - 8 4 holes for M4, M5, M6 or UNC #6-32 screws (4.32 to 6.35 mm/0.170 to 0.250 in.)
- 9 Rack is fastened to 35 mm/1.38 in. wide and 15 mm/0.59 in. deep DIN rails. Mounting on a 35 mm/1.38 in. wide and 7.5 mm/0.295 in. deep DIN rail is possible (in this case, the product withstands less mechanical stress)

**BMEXBP1002** is a 10-slot dual Ethernet and X-bus backplane with:


- 1 2 CPS slots for only redundancy power supply **BMXCP0400**
- 2 10 slots with:
  - 2a 8 Ethernet and X-bus connectors for mixed modules
  - 2b 2 X-bus connectors for X-bus modules
  - 3 Expansion: 1 connector for an X-bus backplane expansion
  - 4 2 fixing points for the shielding connection bar
  - 5 Protective earth screw
  - 6 Slots for anchoring the module pin
  - 7 Tapped holes for the locking screw on each module
  - 8 4 holes for M4, M5, M6 or UNC #6-32 screws (4.32 to 6.35 mm/0.170 to 0.250 in.)

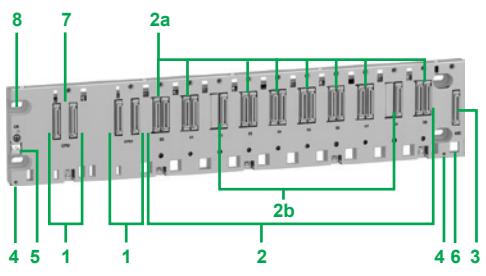


BMEXBP1002 backplane

# Modicon X80 I/O platform


## Single-rack configuration



BMXXBP0400



BMXXBP0600




BMXXBP0800



BMXXBP1200




BMEXBP0400




BMEXBP0800



BMEXBP1200



BMEXBP0602



BMEXBP1002

### X-bus racks

| Description | Type of module to be inserted   | No. of slots (1) | Power consumption (2) | Reference  | Weight kg/lb |
|-------------|---|------------------|-----------------------|------------|--------------|
| X-bus racks | BMXCPS power supply, <b>BMXP34</b> or <b>BMEP58</b> processor, I/O modules, communication modules and application-specific modules (counter, motion control and serial) | 4                | 1 W                   | BMXXBP0400 | 0.630/ 1.389 |
|             |   | 6                | 1.5 W                 | BMXXBP0600 | 0.790/ 1.742 |
|             |   | 8                | 2 W                   | BMXXBP0800 | 0.950/ 2.094 |
|             |   | 12               | —                     | BMXXBP1200 | 1.270/ 2.780 |

### Ethernet + X-bus racks (3) (4)

| Description (5)  | Type of module to be inserted  | Ethernet connectors | X-bus connectors | Power consumption (6) | Reference (3) | Weight kg/lb |
|--|--|---------------------|------------------|-----------------------|---------------|--------------|
| 4-slot Ethernet + X-bus backplane                                | BMXCPS power supply, <b>BMEP58/ BMEH58</b> processor, I/O modules, communication modules and application-specific modules (counter, motion control and serial)               | 4                   | 4                | 2.8 W                 | BMEXBP0400    | 0.719/ 1.500 |
| 8-slot Ethernet + X-bus backplane                                |  | 8                   | 8                | 3.9 W                 | BMEXBP0800    | 1.064/ 2.350 |
| 12-slot (8 Ethernet + X-bus/4 X-bus) backplane                   |  |                     | 12               | 3.9 W                 | BMEXBP1200    | 1.398/ 3.080 |
| 6-slot Ethernet + X-bus dual power supply backplane              | BMXCPS4002 redundant power supply, <b>BMEP58/ BMEH58</b> processor, I/O modules, communication modules and application-specific modules (counter, motion control and serial) | 6                   | 6                | 3.9 W                 | BMEXBP0602    | 1.377/ 3.036 |
| 10-slot (8 Ethernet + X-bus/2 X-bus) dual power supply backplane |  | 8                   | 10               | 3.9 W                 | BMEXBP1002    | 1.377/ 3.036 |

(1) Number of slots taking the processor module, I/O modules, communication modules and application-specific modules (excluding power supply module).


(2) Power consumption of anti-condensation resistor(s).

(3) In an M580 architecture, Ethernet backplanes can be used for RIO drop Ethernet (EIO) but not as expansion racks anywhere. For expansion racks, it is necessary to use BMXXBP0400/0600/0800/1200 racks.

(4) For multi-rack configuration, see page 2/6.

(5) Number of slots for maximum number of modules excluding power supply rack expansion modules.

(6) Power consumption of anti-condensation resistor(s).

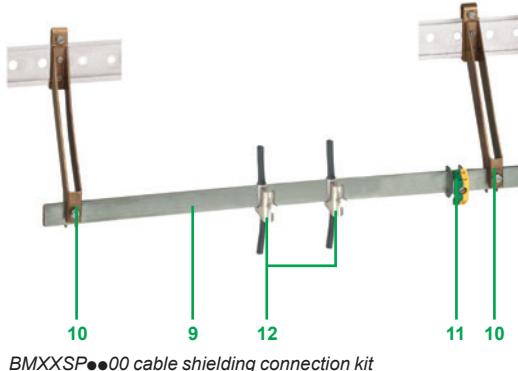

### Description

#### Dual Ethernet and X-bus backplanes

To be ordered separately:

- A **BMXXSP●00** cable shielding connection kit, used to protect against electrostatic discharge when connecting the shielding on cordsets for connecting:
- Analog, counter and motion control modules
  - A Magelis XBT operator interface to the processor (via **BMXXCAUSBH0●0** shielded USB cable)

The **BMXXSP●00** shielding system comprises:

- 9 A metal bar that takes the clamping rings and the earthing terminal
- 10 Two sub-bases to be mounted on the rack
- 11 An earthing terminal (not included)


12 Not included in the shielding connection kit, the **STBXSP30●0** clamping rings (sold in lots of 10, cross-section 1.5...6 mm<sup>2</sup>/16...10 AWG or 5...11 mm<sup>2</sup>/10...7 AWG)



### Accessories

| Description   | For use with   | Reference  | Weight kg/lb   |
|---|--|--|--|
| <b>Shielding connection kits</b><br>comprising:<br>- 1 metal bar<br>- 2 support sub-bases | BM●XBP0400 rack<br>BMXXBP0600 rack<br>BMEXBP0602 rack<br>BM●XBP0800 rack<br>BM●XBP1200 rack<br>BMEXBP1002 rack         | <b>BMXXSP0400</b><br><b>BMXXSP0600</b><br><b>BMXXSP0800</b><br><b>BMXXSP1200</b> | 0.280/<br>0.617<br>0.310/<br>0.683<br>0.340/<br>0.750<br>0.400/<br>0.882 |
| <b>Spring clamping rings</b><br><i>Sold in lots of 10</i>                                 | Cables, cross-section 1.5...6 mm <sup>2</sup> /16...10 AWG<br>Cables, cross-section 5...11 mm <sup>2</sup> /10...7 AWG | <b>STBXSP3010</b><br><b>STBXSP3020</b>   | 0.050/<br>0.110<br>0.070/<br>0.154                                       |
| <b>Protective covers</b><br>(replacement parts)<br><i>Sold in lots of 5</i>               | Unoccupied slots on BMXXBP●00 rack   | <b>BMXXEM010</b>   | 0.005/<br>0.011  |

(1) The earthing terminal is not included in the shielding connection kits.

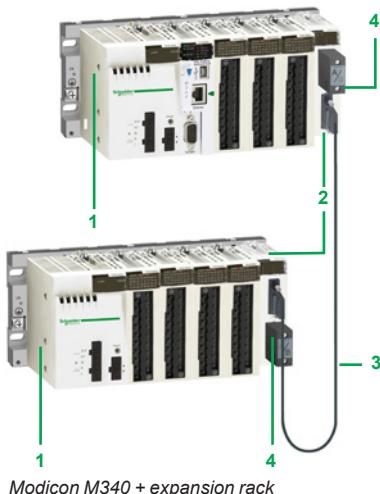

Modicon M340 + expansion rack

### Composition of a multi-rack configuration

Multi-rack configurations are made up of **BMXPB•••0** racks (1). They comprise:

- 2 racks maximum for a station with **BMXP341000** processor
- 4 racks maximum for a station with **BMXP3420•••** or **BMXP3420•••CL** processor
- 4 racks maximum for a station with **BMEP581020** or **BMEP5820••0** processor
- 8 racks maximum for a station with **BMEP5830•0**, **BMEP5840•0**, **BMEP585040**, or **BMEP586040** processor

Each rack is equipped with:

- 1 A **BMXCP•••••** power supply or two **BMXCP4002** redundant power supplies (2)
- 2 A **BMXXBE1000** rack expansion module. This module, inserted in the right-hand end of the rack (**XBE** slot, see page 2/2) does not occupy rack slots **00...11** (4, 6, 8, or 12 slots are still available).
- 3 The **BMXXBE1000** rack expansion modules, which are connected to each other by X-bus cordsets

#### X-bus

The racks, distributed on the X-bus, are connected to each other by X-bus extension cordsets 3 with a total length of 30 m/98.42 ft maximum.

The racks are connected in a daisy chain using **BMXXBC•••0K** (3) X-bus extension cordsets connected to the two 9-way SUB-D connectors 7 and 8 on the front panels of the **BMXXBE1000** rack expansion modules 2.

#### Line terminators 4

Both expansion modules at the ends of the daisy chain must have a line terminator 4 **TSXTLYEX** on the unused 9-way SUB-D connector.

**Note:** The processor module is always positioned in the rack at address 0. However, in an X-bus daisy chain, the order of the racks has no effect on operation. For example, the order of the daisy chain can be 0-1-2-3, 2-0-3-1, or 3-1-2-0, etc.

### Composition of an expansion backplane configuration

The Modicon M580 standalone processor supports 4 to 8 local racks (depending on the CPU performance level), using existing X80 I/O modules and accessories. The Modicon M580 CPU can be installed in the first rack (0) and this can be a dual bus rack. The M580 PLC will support up to 7 **BMXPB•••0** PV02 or higher backplanes (racks) of 4, 6, 8, or 12 slots. The main backplane (rack 0) will support the CPU.

To extend the configuration using additional racks, users can use a bus extender module (**BMXXBE1000**) and X-bus cables. The backplane extender should be plugged into the dedicated connector on the right side of the backplane. It does not occupy any module slot. The XBE extender module is not hot-swappable, like the rest of the X80 I/O platform. Each backplane has to include a power supply module and will support up to 12 modules.

An expansion rack can be connected to the main backplane and the X80 drop (EIO).

The rack address is assigned as follows:

- Each rack will be assigned a physical address using 4 microswitches located in the bus extender module
- The main rack containing the CPU will be assigned the address 0
- The other racks will be assigned addresses 1 to 7

Each rack is equipped with:

- 1 A **BMXCP•••••** power supply or two **BMXCP4002** redundant power supplies (2)
- 2 A **BMXXBE1000** rack expansion module. This module, inserted in the right-hand end of the rack (**XBE** slot) does not occupy rack slots **00...11** (4, 6, 8, or 12 slots are still available).

- 3 The **BMXXBE1000** rack expansion modules, which are connected to each other by X-bus cordsets

4 Line terminators: Both expansion modules at the ends of the daisy chain must have a line terminator 4 **TSXTLYEX** on the unused 9-way SUB-D connector.


(1) **BMXPB•••0** is only supported on M580 processor based platforms.

(2) **BMXCP4002** redundant power supply is only compatible only with the **BMEXP0602** and **BMEXP1002** dual power supply backplane.

(3) **BMXXBC•••0K** extension cordsets, length 0.8 m/2.62 ft, 1.5 m/4.92 ft, 3 m/9.84 ft, 5 m/16.40 ft, or 12 m/39.37 ft, with angled connectors or **TSXCBY08K** extension cordsets, length 1 m/3.28 ft, 3 m/9.84 ft, 5 m/16.40 ft, 12 m/39.37 ft, 18 m/59.05 ft, or 28 m/91.86 ft, with straight connectors.



Modicon M580 + expansion rack

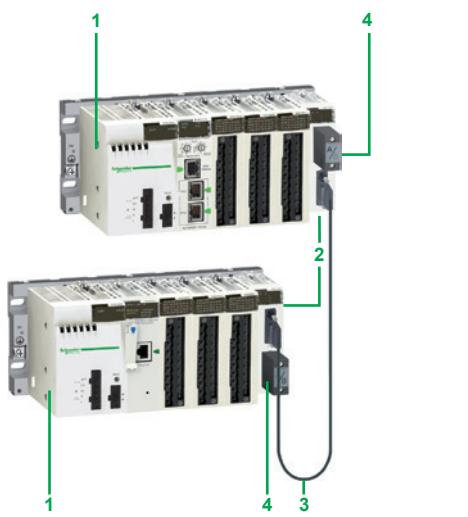

Modicon X80 drop + expansion rack

### Ethernet racks

Modicon M580 CPUs support dual bus backplanes (Ethernet and X-bus), as well as Ethernet ring or star architecture on their Ethernet port.

**BME•58••2•** CPUs support Ethernet star or ring architectures (RSTP loop is supported on ports 2 and 3). The embedded scanner allows scanning of distributed equipment. The CPU directly drives these devices ("NOC" embedded function).



**BME•58••4•** CPUs support an embedded scanner that allows scanning of X80 drops on Ethernet RIO (EIO) and distributed equipment.

Modicon M580 CPUs have an additional third Ethernet port dedicated to the connection of a service tool such as a PC, HMI, or network analyzer. This port is labeled "ETH 1". It does not support RSTP.

Modicon M580 CPUs can communicate on the main Ethernet backplane. They cannot be installed in an expansion rack.

It is necessary to use an Ethernet backplane:

| Reference          | Description                                    |
|--------------------|--|
| <b>BMEXBP0400</b>  | Standard 4 -slot backplane                     |
| <b>BMEXBP0800</b>  | Standard 8-slot backplane                      |
| <b>BMEXBP1200</b>  | Standard 12-slot backplane                     |
| <b>BMEXBP0602</b>  | Dual power supply 6-slot backplane             |
| <b>BMEXBP1002</b>  | Dual power supply 10-slot backplane            |
| <b>BMEXBP0400H</b> | Ruggedized 4-slot backplane                    |
| <b>BMEXBP0800H</b> | Ruggedized 8-slot backplane                    |
| <b>BMEXBP1200H</b> | Ruggedized 12-slot backplane                   |
| <b>BMEXBP0602H</b> | Ruggedized dual power supply 6-slot backplane  |
| <b>BMEXBP1002H</b> | Ruggedized dual power supply 10-slot backplane |

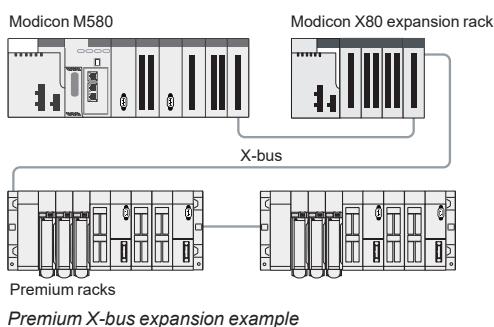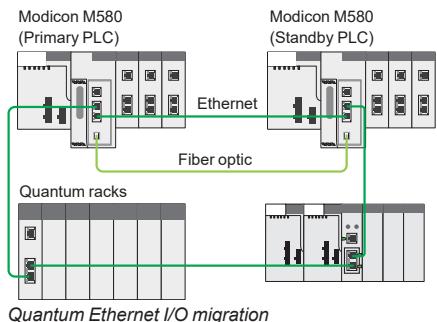

### Quantum Ethernet I/O migration

Modicon M580 CPUs levels 4 and above (**BMEP584040**, **BMEP585040**, **BMEP586040**) support Quantum I/O using the Quantum Ethernet remote drop adapter **140CRA31200**. The number of Remote I/O drops allowed (up to 31) depends on the M580 processor model.

The Quantum Ethernet drop is configured using Unity Pro software. Each Quantum I/O can be configured with the X80 I/O model (Device DDT) or the Quantum model ("State ram": %I, %IW, %M, %MW) to simplify the reuse of legacy applications.

The compatibilities of Quantum I/O in an Ethernet Quantum drop are identical in a Quantum processor based architecture. For more information, please refer to page 1/8.

In addition, the Modicon LL984 legacy language is supported by some CPU models; for more information, please refer to the M580 product catalog.

### Premium X-bus extension: making migration as simple as possible

The Modicon M580 CPU supports revamping of an existing Premium installation by replacing the Premium rack 0 (CPU and communication modules) with an M580 rack. It is also possible to combine Premium racks **TSXRKY4EX/6EX/8EX/12EX** with X80 I/O based on an X-bus rack. The majority of existing configurations are supported. The number of expanded racks allowed depends on which CPU is being used:

- The **BMEP581020**, **BMEP582020**, and **BMEP582040** CPUs support a main local rack and up to 3 expansion racks. If you are using 4, 6, or 8-slot Premium expansion racks, you can install 2 physical racks at each assigned rack address, allowing up to 6 Premium expansion racks (up to 6 backplanes and 100 m/328 ft. between 2 drops).
- The **BMEP583020**, **BMEP583040**, **BMEP584020**, and **BMEP584040** CPUs support a main local rack with up to 7 expansion racks. If you are using 4, 6, or 8-slot Premium expansion racks, you can install 2 physical racks at each assigned rack address, allowing up to 14 Premium expansion racks.

The maximum number of supported X-bus drops is as follows:

- 4 for **BMEP581●●●/2●●●**
- 8 for **BMEP583●●●/4●●●**

The maximum number of X-bus drops is calculated as follows:

- Max number = 1 (CPU rack: **BMXXBP●●00** or **BMEXP●●00**)  
+  $\frac{1}{2}$  Nb. **TSXRKY4/6/8EX** racks + Nb. **TSXRKY12EX** racks + Nb. **BMXXBP●●00** racks

### Description

The front panel of the **BMXXBE1000** rack expansion module comprises:


- 5 A screw for locking the module in its slot (at the far right-hand end of the rack)
- 6 A display block with 5 LEDs:
  - RUN LED (green): module running
  - COL LED (red): several racks have the same address, or rack address 0 does not contain the **BMXP34●●●0** or **BMXP58●0●●0** processor module
  - LEDs 0, 1, 2, and 3 (green): rack address 0, 1, 2, or 3
- 7 A 9-way female SUB-D connector, marked X-bus, for the incoming X-bus cordset
  - 3 connected to the upstream rack, or if it is the first rack, for the **A** line terminator included in the **TSXTLYEX 4** pack
- 8 A 9-way female SUB-D connector, marked X-bus, for the outgoing X-bus cordset
  - 3 to the downstream rack, or if it is the last rack, for the **B** line terminator included in the **TSXTLYEX 4** pack

#### On the right-hand side panel

A flap for accessing the 3 rack addressing microswitches: 0...3

#### Installation rules for **BM●XP●●●0** racks

Rules for installing racks in enclosures (see our website [www.schneider-electric.com](http://www.schneider-electric.com)).

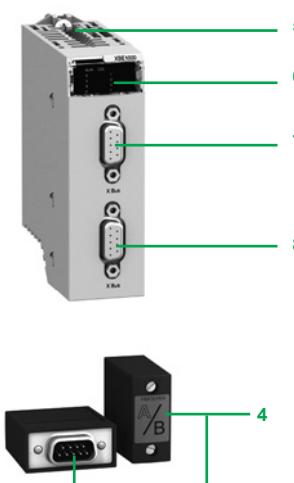



BMXXBE1000

2

### Rack expansion

| Description                           | Use   | Reference  | Weight kg/lb    |
|---------------------------------------|---|------------|-----------------|
| Modicon X80 I/O rack expansion module | Standard module for mounting in each rack ( <b>XBE</b> slot) and used to interconnect:<br>- Up to 2 racks with BMXP341000 processor module<br>- Up to 4 racks with BMXP342●●●● processor module<br>- Up to 3 racks with BMEP581020/20●●●● processor module<br>- Up to 7 racks with BMEP5830●●/40●●/50●●/60●● processor module<br>- 1 rack with X80 drop (EIO) | BMXXBE1000 | 0.178/<br>0.392 |
| Modicon X80 I/O rack expansion kit    | Complete kit for 2-rack configuration comprising:<br>- 2 BMXXBE1000 rack expansion modules<br>- 1 BMXXBC008K extension cordset, length 0.8 m/2.62 ft<br>- 1 TSXTLYEX line terminator (set of 2)   | BMXXBE2005 | 0.700/<br>1.543 |



BMXXBC●●●K

### Cordsets and connection accessories

| Description              | Use   | Composition                | Type of connector | Length m/ft  | Reference  | Weight kg/lb    |
|--------------------------|---|----------------------------|-------------------|--------------|------------|-----------------|
| X-bus expansion cordsets | Between 2 BMXXBE1000 rack expansion modules | 2 x 9-way SUB-D connectors | Angled            | 0.8/<br>2.62 | BMXXBC008K | 0.165/<br>0.363 |
|                          | total length 30 m/98.42 ft max.             |                            |                   | 1.5/<br>4.92 | BMXXBC015K | 0.250/<br>0.551 |
|                          |   |                            |                   | 3/<br>9.84   | BMXXBC030K | 0.420/<br>0.926 |
|                          |   |                            |                   | 5/<br>16.40  | BMXXBC050K | 0.650/<br>1.433 |
|                          |   |                            |                   | 12/<br>39.37 | BMXXBC120K | 1.440/<br>3.175 |

|          |                  |             |                 |
|----------|------------------|-------------|-----------------|
| Straight | 1/<br>3.28       | TSXCBY010K  | 0.160/<br>0.353 |
|          | 3/<br>9.84       | TSXCBY030K  | 0.260/<br>0.573 |
|          | 5/<br>16.40      | TSXCBY050K  | 0.360/<br>0.794 |
|          | 12/<br>39.37     | TSXCBY120K  | 1.260/<br>2.778 |
|          | 18/<br>59.05     | TSXCBY180K  | 1.860/<br>4.101 |
|          | 28/<br>91.86 (1) | TSXCBY280KT | 2.860/<br>6.305 |

|            |   |   |   |                |            |                   |
|------------|---|---|---|----------------|------------|-------------------|
| Cable reel | Length of cable to be equipped with TSXCBYK9 connectors | Cable with ends with flying leads, 2 line testers | – | 100/<br>328.08 | TSXCBY1000 | 12.320/<br>27.161 |
|------------|---|---|---|----------------|------------|-------------------|

| Description      | Use  | Composition                                 | Sold in lots of | Reference | Weight kg/lb    |
|------------------|--|---|-----------------|-----------|-----------------|
| Line terminators | Required on both BMXXBP●●●0 modules located at either end of the daisy chain | 2 x 9-way SUB-D connectors marked A/ and /B | 2               | TSXTLYEX  | 0.050/<br>0.110 |

|                           |                       |                                     |   |          |                 |
|---------------------------|-----------------------|-------------------------------------|---|----------|-----------------|
| X-bus straight connectors | For TSXCBY1000 cables | 2 x 9-way SUB-D straight connectors | 2 | TSXCBYK9 | 0.080/<br>0.176 |
|---------------------------|-----------------------|-------------------------------------|---|----------|-----------------|

|                        |                                |                              |   |             |   |
|------------------------|--------------------------------|------------------------------|---|-------------|---|
| Connector assembly kit | For fixing TSXCBYK9 connectors | 2 crimping pliers, 1 pen (1) | – | TSXCBYACC10 | – |
|------------------------|--------------------------------|------------------------------|---|-------------|---|

(1) To fix the connectors to the cable, you also need a wire stripper, a pair of scissors, and a digital ohmmeter.

### **Presentation**

**BMXCPS••••** power supply modules provide the power supply for each **BMEXBP••00** or **BMXXBP••00** Modicon X80 I/O rack and the modules installed on it. (**BMEXBP••02** supports only **BMXCPS•••2**)

The Modicon X80 I/O power supply module offer comprises:

- Five power supply modules for DC line supplies:
  - 24 V  $\text{---}$ , 17 W isolated power supply module, **BMXCPS2010**
  - 24...48 V  $\text{---}$ , 32 W isolated power supply module, **BMXCPS3020**
  - 24...48 V  $\text{---}$ , 40 W redundant power supply module, **BMXCPS4022**
  - 125 V  $\text{---}$ , 36 W power supply module, **BMXCPS3540T** (extended operating temperature -25 to +70 °C/-13 to +158 °F)
  - 125 V  $\text{---}$ , 40 redundant power supply module, **BMXCPS3522**
- Three power supply modules for AC line supplies:
  - 100...240 V  $\sim$ , 20 W power supply module, **BMXCPS2000**
  - 100...240 V  $\sim$ , 36 W power supply module, **BMXCPS3500**
  - 100...240 V  $\sim$ , 40 W redundant power supply module, **BMXCPS4002**

### **Description**

The power supply module is selected according to:

- The electrical line supply: 24 V  $\text{---}$ , 48 V  $\text{---}$ , 125 V  $\text{---}$ , or 100...240 V  $\sim$
- The required power (see the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com)) (1)

**BMXCPS••••** power supply modules have the following on the front panel:

- 1 A display block comprising:
  - OK LED (green), lit if rack voltages are present and correct
  - 24 V LED (green), lit when the sensor voltage is present (BMXCPS2000/3500/3540T power supply modules only)
  - RD LED (green), lit when all the internal power supply modules function normally (BMXCPS4002/BMXCPS4022/BMXCPS3522 redundant power supply modules only)
  - ACT LED (green), lit when the power supply is the Master power supply, off when it act as a slave supply in redundant application (BMXCPS4002/BMXCPS4022/BMXCPS3522 redundant power supply modules only)
- 2 A pencil-point RESET pushbutton for a cold restart of the application
- 3 A 2-way connector that can take a removable terminal block (caged or spring-type) for connecting the alarm relay
- 4 A 5-way connector that can take a removable terminal block (caged or spring-type) for connecting the following:
  - $\text{---}$  or  $\sim$  line supply
  - Protective earth ground
  - Dedicated 24 V  $\text{---}$  power supply for the input sensors (for BMXCPS2000/3500/3540T power supply modules only)

#### **Included with each power supply module:**

- Set of two caged removable terminal blocks (5-way and 2-way) **BMXXTSCPS10**

#### **To be ordered separately (if necessary):**

- Set of two spring-type removable terminal blocks (5-way and 2-way) **BMXXTSCPS20**



### **Compatibility of the power supply with the rack**

The redundant AC power supply could be used alone in single power supply rack or dual power supply rack as a pair. For high available applications, two independent redundant power supplies could be used to increase the security of power supply. In case the master power supply fails to provide the whole current, the slave power supply will change to master mode and continue to function.

| Type   | Standalone power supply<br>( <b>BMXCPS•••0</b> ) | Redundant power supply<br>( <b>BMXCPS•••2</b> ) |
|--|--|---|
| Single Power Supply Racks<br>( <b>BMXXBP••00</b> , <b>BMEXBP••00</b> ) | Compatible                                       |   |
| Dual Power Supply Racks<br>( <b>BMEXBP••02</b> )                       | Incompatible                                     | Compatible                                      |

 Compatible  
 Incompatible

(1) This power consumption calculation for the rack can also be performed by the Unity Pro programming software.

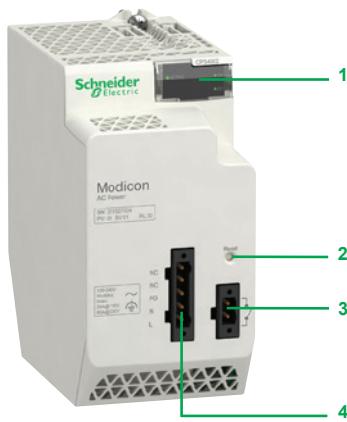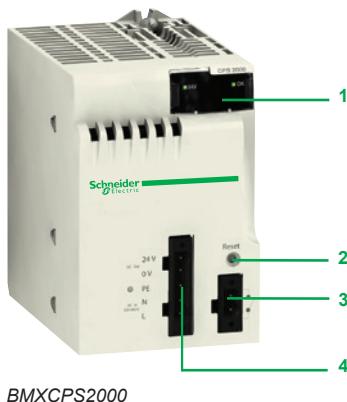

### Functions

#### Alarm relay

The alarm relay incorporated in each power supply module has a volt-free contact accessible on the front panel, on the 2-way connector.

The operating principle is as follows:

In normal operation, with the PLC in RUN, the alarm relay is energized and its contact is closed (state 1).

The relay de-energizes and its associated contact opens (state 0) whenever the application stops, even partially, due to any of the following:

- Occurrence of a detected blocking fault
- Incorrect rack output voltages
- Loss of supply voltage

#### RESET pushbutton

The power supply module in each rack has a RESET button on the front panel which, when pressed, triggers an initialization sequence on the processor and the modules in the rack it supplies.

Pressing this pushbutton triggers a sequence of service signals, which is the same as that for:

- A power break, when the pushbutton is pressed
- A power-up, when the pushbutton is released

In terms of the application, these operations represent a cold start (forcing the I/O modules to state 0 and initializing the processor).

#### Sensor power supply

**BMXCP2000/3500** AC power supply modules and **BMXCP3540T** DC power supply modules have an integrated 24 V  $\text{---}$  supply for powering the input sensors.

Connection to this 24 V  $\text{---}$  sensor power supply is via the 5-way connector on the front panel.

The available power depends on the power supply module (0.45 A or 0.9 A).

### References

Each **BMEXBP $\bullet\bullet\bullet$ 00** or **BMXXBP $\bullet\bullet\bullet$ 00** rack must be equipped with a power supply module. **BMEXBP $\bullet\bullet\bullet$ 02** must be equipped with 1 or 2 redundant power supply modules. These modules are inserted in the leftmost power supply slots of each rack (marked CPS).

The power required to supply each rack depends on the type and number of modules installed in the rack. It is therefore necessary to draw up a power consumption table for each rack in order to determine which **BMXCP $\bullet\bullet\bullet\bullet$**  power supply module is the most suitable for each rack (please consult our website [www.schneider-electric.com](http://www.schneider-electric.com)).

#### Power supply modules (1)

| Line supply                        | Available power (2)    |                               |                                  |          | Nominal current<br>24 V $\text{---}$ rack<br>(3) | Reference             | Weight<br>kg/lb |
|------------------------------------|------------------------|-------------------------------|----------------------------------|----------|--|-----------------------|-----------------|
|                                    | 3.3 V $\text{---}$ (3) | 24 V $\text{---}$ rack<br>(3) | 24 V $\text{---}$<br>sensors (4) | Total    |  |                       |                 |
| 24 V $\text{---}$<br>isolated      | 8.3 W                  | 17 W                          | —                                | 17 W     | 0.7 A  | <b>BMXCP2010</b>      | 0.290/<br>0.639 |
| 24...48 V $\text{---}$<br>isolated | 15 W                   | 32 W                          | —                                | 32 W     | 1.3 A  | <b>BMXCP3020</b>      | 0.340/<br>0.750 |
| 24...48 V $\text{---}$             | 18 W                   | 40 W                          | —                                | 40 W     | 1.67 A   | <b>BMXCP4022</b>      | 0.810/<br>1.786 |
| 100...150 V $\text{---}$           | 15 W                   | 31.2 W                        | 21.6 W                           | 36 W (5) | 1.3 A  | <b>BMXCP3540T (5)</b> | 0.340/<br>0.750 |
|                                    | 180 W                  | 40 W                          | —                                | 40 W     | 1.67 A   | <b>BMXCP3522</b>      | 0.610/<br>1.345 |
| 100...240 V $\text{---}$           | 8.3 W                  | 16.8 W                        | 10.8 W                           | 20 W     | 0.7 A  | <b>BMXCP2000</b>      | 0.300/<br>0.661 |
|                                    | 15 W                   | 31.2 W                        | 21.6 W                           | 36 W     | 1.3 A  | <b>BMXCP3500</b>      | 0.360/<br>0.794 |
|                                    | 18 W                   | 40 W                          | —                                | 40 W     | 1.67 A   | <b>BMXCP4002</b>      | 0.360/<br>0.794 |

#### Separate part

| Description                      | Type        | Composition  | Reference          | Weight<br>kg/lb |
|----------------------------------|-------------|--|--------------------|-----------------|
| Set of 2 removable<br>connectors | Spring-type | One 5-way terminal block and<br>one 2-way terminal block | <b>BMXXTSCPS20</b> | 0.015/<br>0.033 |
|                                  | Caged       | One 5-way terminal block and<br>one 2-way terminal block | <b>BMXXTSCPS10</b> | 0.020/<br>0.044 |

(1) Include a set of 2 caged removable connectors. Spring-type connectors available separately under reference **BMXXTSCPS20**.

(2) The sum of the power consumed on each voltage (3.3 V  $\text{---}$  and 24 V  $\text{---}$ ) must not exceed the total power of the module. See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(3) 3.3 V  $\text{---}$  and 24 V  $\text{---}$  rack voltages for powering modules in the Modicon X80 I/O rack.

(4) 24 V  $\text{---}$  sensor voltage for powering the input sensors (voltage available via the 2-way removable connector on the front panel).

(5) Extended operating temperature -25 to +70 °C/-13 to +158 °F (with power derating at extreme temperatures: 27 W between -25 and 0 °C/-13 and 0 °F and between 60 and 70 °C/140 and 158 °F).



BMXCP2010/3020



BMXCP2000/3500



BMXCP4002



BMXCP3522



BMXCP3500



---

**Discrete I/O modules***Selection guide* ..... page 3/2

- Presentation, description ..... page 3/8
- Connections ..... page 3/9
- Functions ..... page 3/10
- Complementary characteristics ..... page 3/11
- References ..... page 3/12

**Analog I/O modules***Selection guide* ..... page 3/14

- Presentation ..... page 3/18
- Description ..... page 3/19
- Connections, combinations ..... page 3/20
- Complementary characteristics ..... page 3/21
- References ..... page 3/22

**HART analog I/O modules***Selection guide* ..... page 3/24

- Presentation, description ..... page 3/26
- References ..... page 3/27

**BMXEHC0200/0800 counter modules**

- Presentation, description ..... page 3/28
- Functions ..... page 3/29
- References ..... page 3/31

**BMXERT1604T time stamping system**

- Presentation, description ..... page 3/32
- Performance, references ..... page 3/33

**BMXEAЕ0300 SSI encoder interface module**

- Presentation, description ..... page 3/34
- Functions, references ..... page 3/35

**BMXMSP0200 motion control module**

- Presentation, description ..... page 3/36
- Operation, references ..... page 3/37

**MFB motion control**

- Presentation, functions ..... page 3/38
- Setup ..... page 3/39

**BMXETM0200H expert frequency input module**

- Presentation, description ..... page 3/40
- References ..... page 3/41

**PMESWT0100 weighing module**

- Presentation, description ..... page 3/42
- References ..... page 3/43

# Modicon X80 I/O platform

## Discrete I/O modules Input modules

| Applications  |   | 8-channel input modules   |   | 16-channel input modules  |           | 16-channel input modules   |   |   |                         |   |            |
|---|---|---|---|---|-----------|--|---|---|-------------------------|---|------------|
|   |   | Connection via caged, screw clamp, or spring-type removable block terminal                  |   |   |           | Connection via caged, screw clamp, or spring-type removable block terminal   |   | Connection via caged or spring-type removable block terminal                        |                         |   |            |
|   |   |            |   |  |           |                                      |   |  |                         |   |            |
| Type  |   | ~   | ~   | --  | --        | ~ or --  | ~   | --  | --                      |   |            |
| Voltage   |   | 200...240 V   | 100...120 V                               | 24 V  | 48 V      | 24 V (~ or --)   | 48 V                                      | 100...120 V ~   | 200...240 V ~           | 125 V   |            |
| Current per channel                                       |   | 10.4 mA<br>(for U = 220 V to 50 Hz)   | 5 mA                                      | 3.5 mA  | 2.5 mA    | 3 mA (~ or --)   | 5 mA                                      | 2...15 mA   | 3...15 mA               | 2.4 mA  |            |
| Modularity<br>(Number of channels and commons)            |   | 8 isolated inputs and 1 common  | 8 isolated channels and no common point   | 16 isolated inputs and 1 common   |           | 16 isolated inputs and 1 common  |   | 16 isolated inputs  |                         | 16 isolated inputs and 1 common   |            |
| Connection  |   | Via 20-way caged, screw clamp, or spring-type removable terminal block BMXFTB2000/2010/2020 |   |   |           | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal                            |   |   |                         | Via 40-way connector  |            |
| Isolated inputs   | IEC/EN 61131-2 conformity                                     | Type 2  | Type 3                                    | Type 3  | Type 1    | Type 1 (~)   | Type 3                                    | Type 1  |                         | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal |            |
|   | Logic   | –   | –   | Positive ( <i>sink</i> )  |           | Negative ( <i>source</i> ) (--)  | –   | Positive ( <i>sink</i> )  |                         |   |            |
|   | Type of input   | Capacitive  | Capacitive                                | Current sink  |           | Resistive  | Capacitive                                |   |                         | Current sink  |            |
|   | Sensor compatibility IEC/EN 60947-5-2                         | 2-wire ~  | 2-wire ~                                  | 2-wire --, 3-wire -- PNP any type   |           | 2-wire --/~, 3-wire -- PNP or NPN any type   | 2-wire ~                                  | 2-wire, 3-wire  |                         | –   |            |
| Sensor power supply (ripple included)                     |   | 170...264 V   | 85...132 V (no sensor power monitoring)   | 19...30 V   | 38...60 V | 19...30 V --<br>20...26 V ~  | 40...52 V                                 | 85...132 V  | 100...120 V ~           | 200...240 V ~   | 88...150 V |
| Protection of inputs                                      |   | Use one 0.5 A fast-blow fuse per group of channels  | Use one 0.25 A fast-blow fuse per channel | Use one 0.5 A fast-blow fuse per group of channels                                |           | Use one 0.5 A fast-blow fuse per group of channels   | Use one 0.25 A fast-blow fuse per channel | Use one 0.5 A fast-blow fuse per group of channels                                  | 8.5 W (at 40 °C/104 °F) |   |            |
| Maximum dissipated power                                  |   | 4.73 W  | 2.35 W                                    | 2.5 W   | 3.6 W     | 3 W<br>0...60 °C/32...140 °F   | 4 W                                       | 3.8 W   | 4.3 W                   | -25...70 °C/-13...158 °F  |            |
| Operating temperature                                     |   | 0...60 °C/32...140 °F   |   |   |           | –  |   |   |                         | –   |            |
| Compatibility with TeSys Quickfit installation system     |   | –   |   |   |           | –  |   |   |                         | –   |            |
| Compatibility with Modicon Telefast ABE7 pre-wired system | Passive connection sub-bases<br>Adapter sub-bases with relays | –   |   |   |           | –  |   |   |                         | –   |            |
| References  |   | <b>BMXDAI0805</b>   <b>BMXDAI0814</b>   <b>BMXDDI1602</b>   <b>BMXDDI1603</b>               |   |   |           | <b>BMXDAI1602</b>   <b>BMXDAI1603</b>   <b>BMXDAI1604</b>   <b>BMXDAI1614</b>   <b>BMXDAI1615</b>   <b>BMXDDI1604T</b> |   |   |                         |   |            |
| Pages   |   | 3/12  |   |   |           | 3/12   |   |   |                         | 3/3   |            |

More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

# Modicon X80 I/O platform

## Discrete I/O modules

### Input modules and mixed I/O modules

| Applications |
|--------------|
|--------------|

|   |
|---|
| <b>32 or 64-channel high-density input modules</b>          |
| Connection via 40-way connectors with preassembled cordsets |



|   |  |
|---|--|
| Type  | ---  |
| Voltage   | 24 V   |
| Current per channel   | Inputs<br>2.5 mA<br><br>Outputs<br>—   |
| Modularity<br>(Number of channels and commons)                | 32 isolated inputs and 2 commons<br><br>64 isolated inputs and 4 commons                                     |
| Connection  | Via one 40-way connector<br><br>Via two 40-way connectors  |
| Isolated inputs   | IEC/EN 61131-2 conformity<br><br>Logic<br><br>Type of input<br><br>Sensor compatibility IEC/EN 60947-5-2     |
| Sensor power supply (ripple included)                         | 19...30 V  |
| Protection of inputs  | Use one 0.5 A fast-blow fuse per group of channels   |
| Isolated outputs  | Fallback<br>IEC/EN 61131-2 conformity<br>Protection<br>Logic   |
| Preactuator power supply (ripple included)                    | —  |
| Output fuse protection  | —  |
| Maximum dissipated power                                      | 3.9 W<br><br>4.3 W   |
| Operating temperature   | 0...60 °C/32...140 °F  |
| Compatibility with TeSys Quickfit installation system         | LU9 G02 splitter boxes (8 motor starters) and BMXFCC●●1●●3 preassembled cordsets.<br>See pages 3/9 and 3/13. |
| Compatibility with Modicon Telefast ABE7 pre-wired system (1) | Passive connection sub-bases<br><br>Adapter sub-bases with relays  |

| References |
|------------|
|------------|

|                    |                    |
|--------------------|--------------------|
| <b>BMXDDI3202K</b> | <b>BMXDDI6402K</b> |
|--------------------|--------------------|

| Pages |
|-------|
|-------|

(1) For more information, please refer to the "Telefast Pre-wired system -- Modicon ABE7 IP20 connection sub-bases" catalog or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

| <b>16 or 32-channel mixed I/O modules</b>                                  |
|--|
| Connection via caged, screw clamp, or spring-type removable block terminal |
| Connection via 40-way connector with preassembled cordsets                 |



|   |   |   |
|---|---|---|
| Type  | ---   | ---   |
| Voltage   | 24 V  | ---   |
| Current per channel   | Inputs<br>2.5 mA<br><br>Outputs<br>—  | Inputs: 24 V<br>Solid-state outputs: 24 V<br><br>3.5 mA   |
| Modularity<br>(Number of channels and commons)                | 32 isolated inputs and 2 commons<br><br>64 isolated inputs and 4 commons  | Inputs: 24 V<br>Solid-state outputs: 24 V<br><br>3.5 mA   |
| Connection  | Via one 40-way connector<br><br>Via two 40-way connectors   | Via BMXFTB2000/2010/2020<br>20-way caged, screw clamp, or spring-type removable terminal block  |
| Isolated inputs   | Type 3<br><br>Positive (sink)<br><br>Current sink<br><br>2-wire ---, 3-wire --- PNP any type  | Type 3<br><br>Positive (sink)<br><br>Current sink<br><br>2-wire ---, 3-wire --- PNP any type  |
| Sensor power supply (ripple included)                         | 19...30 V   | 19...30 V   |
| Protection of inputs  | Use one 0.5 A fast-blow fuse per group of channels  | Use one 0.5 A fast-blow fuse per group of channels  |
| Isolated outputs  | Fallback<br>IEC/EN 61131-2 conformity<br>Protection<br>Logic  | Configurable output fallback, continuous monitoring of output control, and resetting of outputs in case of internal detected fault<br><br>Yes<br>Protected<br>Positive<br>19...30 V |
| Preactuator power supply (ripple included)                    | —   | —   |
| Output fuse protection  | —   | Use a 2 A fast-blow fuse  |
| Maximum dissipated power                                      | 3.9 W<br><br>4.3 W  | 3.7 W<br><br>3.1 W  |
| Operating temperature   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F   |
| Compatibility with TeSys Quickfit installation system         | LU9 G02 splitter boxes (8 motor starters) and BMXFCC●●1●●3 preassembled cordsets.<br>See pages 3/9 and 3/13.  | —   |
| Compatibility with Modicon Telefast ABE7 pre-wired system (1) | Depending on model, 8 or 16-channel passive sub-bases, with or without LED, with common or 2 terminals per channel.<br><br>Depending on model, active sub-bases with solid state or electromagnetic relays (fixed or removable), 16 channels, with common or 2 terminals per channel (screw or spring-type connection). | —   |

|                    |                    |                    |
|--------------------|--------------------|--------------------|
| <b>BMXDDM16022</b> | <b>BMXDDM16025</b> | <b>BMXDDM3202K</b> |
|--------------------|--------------------|--------------------|

| 3/13 |
|------|
|------|

# Modicon X80 I/O platform

Discrete I/O modules  
Output modules

| Applications  |   | 32 or 64-channel high-density output modules   |   |  |   |   |   |   |   | 8 or 16-channel output modules                   |  |   |  |   |   |   |   |            |
|---|---|--|---|--|---|---|---|---|---|--|--|---|--|---|---|---|---|------------|
| Type  | Voltage   | Type   |   | Type   |   | Type  |   | Type  |   | Type   |  | Type  |  | Type  |   | Type  |   |            |
| Type  | — transistor  | — transistor   | — triac   | — relay  | —/— relay   | — transistor  | — triac   | — relay   | —/— relay   | — transistor                                     | — triac  | — relay   | —/— relay  | — transistor  | — triac   | — relay   | —/— relay   |            |
| Voltage   | 24 V  | 24 V   | 100...240 V   | 24...240 V                                       | 100...150 V   | 24 V —, 24...240 V ~  | 24...240 V ~/ 24...125 V —  | 24 V —, 24...240 V ~  | 24...240 V ~/ 24...125 V —  | 24 V   | 100...240 V  | 24...240 V  | 100...150 V                                      | 24 V —, 24...240 V ~  | 24...240 V ~/ 24...125 V —  | 24 V  | 100...240 V   | 24...240 V |
| Current per channel   | 0.1 A   | 0.5 A  | 0.6 A   | 3 A  | 0.3 A (Ith)   | 2 A (Ith)   | 2 A (Ith)   | 2 A (Ith)   | 2 A (Ith)   | 0.1 A  | 0.5 A  | 0.6 A   | 3 A  | 0.3 A (Ith)   | 2 A (Ith)   | 2 A (Ith)   | 0.1 A   | 0.5 A      |
| Modularity (Number of channels and commons)                   | 32 protected outputs and 2 commons  | 64 protected outputs and 4 commons   | 16 protected outputs and 1 common   | 16 isolated outputs                              | 8 non-protected outputs, without common   | 8 normally open isolated relay outputs                              | 16 non-protected outputs and 2 commons                              | 8 normally open/ normally closed isolated relay outputs             | 8 normally open/ normally closed isolated relay outputs             | 32 protected outputs and 2 commons               | 64 protected outputs and 4 commons                 | 16 protected outputs and 1 common   | 16 isolated outputs                              | 8 non-protected outputs, without common   | 8 normally open isolated relay outputs                              | 16 non-protected outputs and 2 commons                              | 8 normally open/ normally closed isolated relay outputs |            |
| Connection  | Via one 40-way connector  | Via two 40-way connectors  | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal | Via 40-way connector                             | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal | Via BMXFTB4000/4020 40-way caged or spring removable terminal block | Via BMXFTB4000/4020 40-way caged or spring removable terminal block | Via BMXFTB4000/4020 40-way caged or spring removable terminal block | Via BMXFTB4000/4020 40-way caged or spring removable terminal block | Via one 40-way connector                         | Via two 40-way connectors                          | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal | Via 40-way connector                             | Via BMXFTB2000/2010/2020 20-way caged, screw clamp, or spring-type removable block terminal | Via BMXFTB4000/4020 40-way caged or spring removable terminal block | Via BMXFTB4000/4020 40-way caged or spring removable terminal block |   |            |
| Outputs   | Fallback  | Configurable output fallback, continuous monitoring of output control, and resetting of outputs in case of internal detected fault   | Configurable output fallback  | Configurable output fallback                     | Configurable output fallback  | Configurable output fallback  | Configurable output fallback  | Configurable output fallback  | Configurable output fallback  | Configurable output fallback                     | Configurable output fallback                       | Configurable output fallback  | Configurable output fallback                     | Configurable output fallback  | Configurable output fallback  | Configurable output fallback  | Configurable output fallback                            |            |
|   | IEC/EN 61131-2 conformity   | Yes  | Yes   | Yes  | Yes   | Yes   | Yes   | Yes   | Yes   | Yes  | Yes  | Yes   | Yes  | Yes   | Yes   | Yes   | Yes   |            |
|   | Protection  | Positive   | Positive  | Positive   | Positive  | Positive  | Positive  | Positive  | Positive  | Positive   | Positive   | Positive  | Positive   | Positive  | Positive  | Positive  | Positive  |            |
| Preactuator power supply (ripple included)                    | 19...30 V —   | 19...30 V  | 100...240 V   | 24...240 V                                       | 100...150 V   | 19...30 V —/ 24...240 V ~   | 19...264 V ~  | 19...30 V —   | 19...264 V ~  | 19...30 V  | 19...30 V  | 19...30 V   | 19...30 V  | 19...30 V   | 19...30 V   | 19...30 V   | 19...30 V   |            |
| Output fuse protection  | Use one 2 A fast-blow fuse per group of channels  | Use one 6.3 A fast-blow fuse per group of channels   | Use one 3 A fast-blow fuse per group of channels  | Use one 4 A fast-blow fuse per group of channels | Use one 0.5 A, 250 V DC fast-blow fuse on each channel                                      | Use one 3 A fast-blow fuse on each output channel                   | Use one 12 A fast-blow fuse on each group of channels               | Use one 12 A fast-blow fuse for each output channel                 | Use one 12 A fast-blow fuse for each output channel                 | Use one 2 A fast-blow fuse per group of channels | Use one 6.3 A fast-blow fuse per group of channels | Use one 3 A fast-blow fuse per group of channels  | Use one 4 A fast-blow fuse per group of channels | Use one 0.5 A, 250 V DC fast-blow fuse on each channel                                      | Use one 3 A fast-blow fuse on each output channel                   | Use one 12 A fast-blow fuse on each group of channels               | Use one 12 A fast-blow fuse for each output channel     |            |
| Maximum dissipated power                                      | 3.6 W   | 6.85 W   | 4 W   | 2.26 W   | —   | 3.17 W  | 2.7 W   | 3.6 W   | 3 W   | 3.6 W  | 3.6 W  | 3.6 W   | 3.6 W  | 3.6 W   | 3.6 W   | 3.6 W   | 3.6 W   |            |
| Operating temperature   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F  | —   | —  | —   | -25...70 °C/-13...158 °F  | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F                            | 0...60 °C/32...140 °F                              | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F                            | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F   | 0...60 °C/32...140 °F                                   |            |
| Compatibility with TeSys Quickfit installation system         | LU9 G02 splitter boxes (8 motor starters) and BMXFCC●●1●●3 preassembled cordsets. See pages 3/9 and 3/13. | —  | —   | —  | —   | —   | —   | —   | —   | —  | —  | —   | —  | —   | —   | —   | —   |            |
| Compatibility with Modicon Telefast ABE7 pre-wired system (1) | Passive connection sub-bases  | Depending on model, passive sub-bases with 8 or 16 channels, with or without LED, with common or with 2 terminals per channel.   | —   | —  | —   | —   | —   | —   | —   | —  | —  | —   | —  | —   | —   | —   | —   |            |
|   | Adapter sub-bases with relays   | Depending on model, active sub-bases with solid state or electromagnetic relays (fixed or removable). 16 channels with 1 common or 2 terminals per channel, screw or spring-type connection. | —   | —  | —   | —   | —   | —   | —   | —  | —  | —   | —  | —   | —   | —   | —   |            |
| References  | BMXDDO3202K   | BMXDDO6402K  | BMXDDO1602  | BMXDDO1612                                       | BMXDAO1605  | BMXDAO1615  | BMXDRA0804T   | BMXDRA0805  | BMXDRA0815  | BMXDRA1605                                       | BMXDRC0805   | —   | —  | —   | —   | —   | —   |            |

Pages

3/12

(1) For more information, please refer to the "Telefast Pre-wired system -- Modicon ABE7 IP20 connection sub-bases" catalog or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

3/12



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

Schneider  
Electric

3/6



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

Schneider  
Electric

3/7

### Presentation

Discrete I/O modules in the Modicon X80 I/O offer are standard modules occupying a single slot on the rack. These modules are equipped with either of the following:

- A connector for a screw or spring-type 20-way removable terminal block
- One or two 40-way connectors

This wide range of "discrete" I/O can be used to meet whatever requirements arise in terms of:

- Functions, AC or DC I/O, positive or negative logic
- Modularity, 8, 16, 32 or 64 channels per module


The inputs receive signals from the sensors and perform the following functions:

- Acquisition
- Adaptation
- Electrical isolation
- Filtering
- Protection against interference signals

The outputs memorize commands issued by the processor to enable control of the preactuators via the decoupling and amplification circuits.

### Description

**BMXD•I/D•O/DRA** discrete I/O modules are standard format (1 slot). They have an IP 20 case to protect the electronics, and are locked into position with a captive screw.

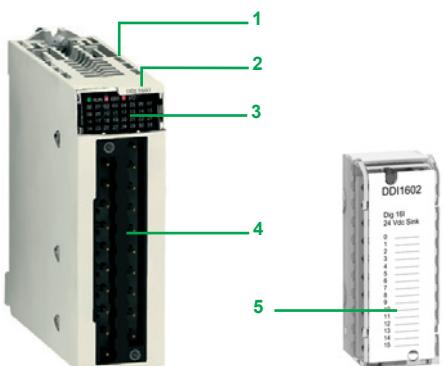


Module for connection via 20-way removable terminal block

#### I/O modules connected via 20-way removable terminal block

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 Connector taking the 20-way removable terminal block for connection of sensors or preactuators

#### To be ordered separately:

- 5 A **BMXFTB20•0** 20-way removable terminal block (identification label supplied with each I/O module) or a preassembled cordset with a 20-way removable terminal block at one end and flying leads at the other (see page 3/9).

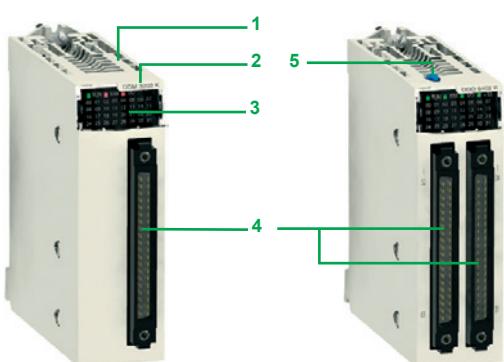

32 and 64-channel modules for connection via one or two 40-way connector(s)


#### I/O modules connected via 40-way connector(s)

- 1 Rigid body providing support and protection for the electronic card
- 2 Module reference marking (a label is also visible on the right-hand side of the module)
- 3 Channel status display block
- 4 One or two 40-way connectors (32 or 64 channels) (1) for connection of sensors or preactuators
- 5 With the 64-channel module, a pushbutton which, with successive presses, displays the state of channels 0...31 or 32...63 on the display block 3 (see page 3/10)


#### To be ordered separately, depending on the type of module:

One or two preassembled cordset(s) with a 40-way connector (see page 3/9)


(1) Fujitsu FCN 40-way connector

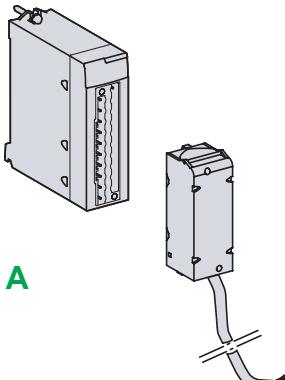**A**


Preassembled cordset with  
20-way removable terminal block at one end and  
flying leads at the other

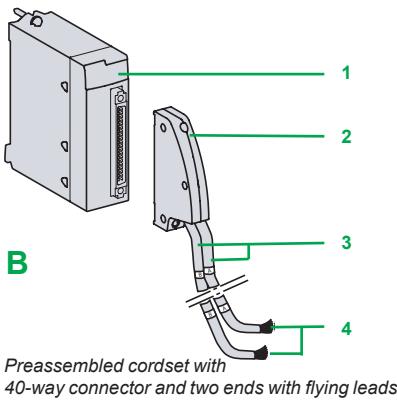**B**

Preassembled cordset with  
40-way connector and two ends with flying leads

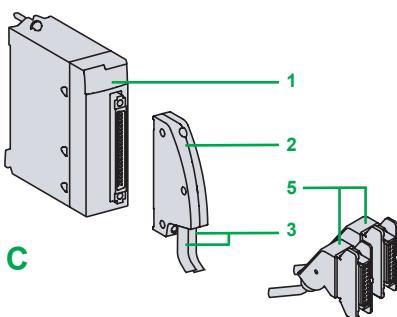

Preassembled cordset with  
40-way connectors and HE10 connectors for  
Modicon Telefast ABE7 system

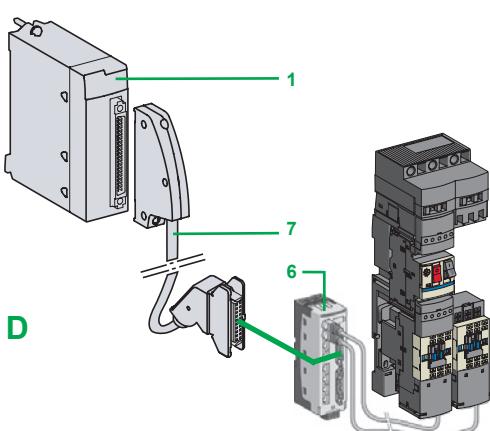

Example of connection to the TeSys Quickfit installation help system

### Connecting modules with removable terminal blocks

There are three types of 20-way removable terminal block:

- Screw clamp terminal block
  - Caged terminal block
  - Spring-type terminal block
- Each removable terminal block can take:
- Bare wires
  - Wires equipped with **DZ5CE** cable ends

**A:** One version of the removable terminal block is equipped with 3, 5 or 10 m cordsets with color-coded flying leads (**BMXFTW●●1**). Use limited to voltages of  $\leq 48$  V.

#### Caged terminal blocks

The capacity of each terminal is:

- Minimum: One  $0.34 \text{ mm}^2$  wire (AWG 22)
- Maximum: One  $1 \text{ mm}^2$  wire (AWG 18)

**BMXFTB2000** caged connectors are equipped with captive screws (maximum tightening torque  $0.5 \text{ N.m}/0.37 \text{ lb-ft}$ ).

#### Screw clamp terminal blocks

The capacity of each terminal is:

- Minimum: One or two  $0.34 \text{ mm}^2$  wires (AWG 22)
- Maximum: Two  $1.5 \text{ mm}^2$  wires (AWG 15)

**BMXFTB2010** screw clamp connectors are equipped with captive screws (maximum tightening torque  $0.5 \text{ N.m}/0.37 \text{ lb-ft}$ ).

#### Spring terminals

The capacity of each terminal in the **BMXFTB2020** spring-type terminal blocks is:

- Minimum: One  $0.34 \text{ mm}^2$  wire (AWG 22)
- Maximum: One  $1 \text{ mm}^2$  wire (AWG 18)

### Connecting modules with 40-way connectors

#### Preassembled cordsets with 40-way connector at one end and flying leads at the other

**B:** Preassembled cordsets can be used for easy direct wire-to-wire connection between the I/O of modules with 40-way connectors **1** and the sensors, preactuators or intermediate terminal blocks.

These preassembled cordsets comprise:

- At one end, a 40-way connector **2** with either of the following:
  - One sheath containing 20 wires with a cross-section of  $0.34 \text{ mm}^2$  (AWG 22) (**BMXFCW●●1**)
  - Two sheaths **3**, each containing 20 wires with a cross-section of  $0.34 \text{ mm}^2$  (AWG 22) (**BMXFCW●●3**)
- At the other end, color-coded flying leads **4** conforming to standard DIN47100.

#### Preassembled cordsets with 40-way connector and HE 10 connector(s)

**C:** Two types of cordset can be used for connecting the I/O of modules **1** with 40-way connectors to Modicon Telefast ABE7 rapid wiring connection and adaptation interfaces.(1)

These preassembled cordsets comprise:

- At one end, a 40-way connector **2** with either of the following:
  - One sheath containing 20 wires (**BMXFCC●●1**)
  - Two sheaths **3** each containing 20 wires (**BMXFCC●●3**)
- At the other end, one or two HE 10 connectors **5**.

### Connection to TeSys Quickfit system

**D:** **1 BMXDDI3202K/6402K** input modules, **BMXDDO3202K/6402K** output modules and **BMXDDM3202K** mixed I/O modules with 40-way connectors are designed, amongst other things, for use in conjunction with the TeSys Quickfit mounting system via the **LUG02 splitter module** **6** (for 8 motor starters).

The splitter modules are easily connected using **7 BMXFCC●●1/●●3** preassembled cordsets.

(1) For more information, please refer to the "Telefast Pre-wired system -- Modicon ABE7 IP20 connection sub-bases" catalog or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

### Functions (1)

The discrete I/O modules provide the following functions:

- **Hot swapping:** Due to their special integrated devices, I/O modules (including application-specific modules) can be removed or added while the power is on.
- **I/O assignment:** The channels of discrete I/O modules are grouped into blocks of 4, 8 or 16 consecutive channels depending on the type of module. Each group of channels can be assigned to a specific application task, namely master or fast.
- **Protection of DC inputs:** The 24 V  $\text{---}$  and 48 V  $\text{---}$  inputs are constant-current type. This characteristic limits the current consumed at the inputs.
- **Protection of DC outputs:** Active transistor outputs can withstand overloads, short-circuits, reverse polarity and inductive over-voltage.
- **Reactivation of DC outputs:** If a line fault has caused an output to trip, the output can be reactivated using this parameter if no other terminal line fault is present. Reactivation is controlled by means of a group of 8 channels. It can be programmed or automatic.
- **RUN/STOP command:** An input can be configured to control the RUN/STOP changeover for the PLC.
- **Output fallback:** This parameter defines the fallback mode used by the DC transistor outputs when the PLC stops. It can assume the “fallback” value at state 0 or state 1 for the corresponding group of 8 channels or the “maintain” value representing the state of the outputs before the PLC stops.
- **I/O module diagnostics:** Each discrete I/O module is equipped with a display block on the front panel centralizing the information necessary for module control, diagnostics and maintenance.

#### Diagnostics via Unity Pro:

Using the integrated diagnostics in Unity Pro, local diagnostics on the module front panel is complemented by system diagnostics based on predefined screens at global hardware configuration level, module level and channel level.

#### Remote diagnostics using a web browser on a “Thin Client” PC:

In addition, the diagnostics described above can be performed remotely using a simple web browser thanks to the standard web server integrated in the Modicon X80 I/O platform (processor with integrated Ethernet port or Ethernet module), using the “ready-to-use” Rack Viewer function.

- **Compatibility with 2-wire and 3-wire sensors:** The discrete input modules can be used in conjunction with OsiSense XS inductive proximity sensors (for compatibility, see page 7/4) and with OsiSense XU photo-electric sensors (for compatibility, see page 7/2).

(1) For further information, please consult our website at [www.schneider-electric.com](http://www.schneider-electric.com).

| Run | Err | I/O |    | +32 |    |    |    |
|-----|-----|-----|----|-----|----|----|----|
| 0   | 1   | 2   | 3  | 4   | 5  | 6  | 7  |
| 8   | 9   | 10  | 11 | 12  | 13 | 14 | 15 |
| 16  | 17  | 18  | 19 | 20  | 21 | 22 | 23 |
| 24  | 25  | 26  | 27 | 28  | 29 | 30 | 31 |

Display block for module BMXDDO6402K

### Complementary characteristics

The following characteristics complement those introduced in the selection guide on pages 3/2 to 3/7.

#### DC input modules BMXDDI16••/1604T/3202K/6402K and BMXDAI1602

- Input impedance at nominal voltage: 6.4 to 19.2 kΩ, depending on model
- Reverse polarity: Protection for modules BMXDDI1602/1603/3202K
- Paralleling of inputs (1): Yes, for modules BMXDDI1602/1603
- Dielectric strength between groups of channels: 500 V ... for modules BMXDDI3202K/6402K
- Temperature derating for module BMXDDI1604T: No derating up to 40°C/104°F, a maximum of 25% of inputs at state 1 at 70°C/158°F

#### AC input modules BMXDAI16••/08••

- Input frequency: 47 to 63 Hz
- Current peak on activation at nominal voltage: 5 to 380 mA depending on model
- Input impedance at nominal voltage and F = 55 Hz: 6 to 28 kΩ, depending on model

#### Triac output module BMXDAO1605

- Current via common: 2.4 A
- Current for the 4 commons together: 4.8 A

#### Isolated triac output module BMXDAO1615

- Current per module: 10 A maximum continuous

#### DC transistor output modules BMXDDO16••/3202K/6402K

- Dielectric strength between groups of channels: 500 V ... for modules BMXDDO3202K/6402K

#### Relay output modules BMXDRA08••/1605 and BMXDRC0805

- Protection against AC inductive overvoltage: Use an RC circuit or ZNO surge limiter appropriate to the voltage in parallel on each output.
- Protection against DC inductive overvoltage: Use a discharge diode on each output.

#### Mixed I/O relay module BMXDDM16025

- Input impedance at nominal voltage: 6.8 kΩ
- Dielectric strength between groups of inputs: 500 V ...

#### DC mixed I/O modules BMXDDM16022/3202K

- Input impedance at nominal voltage: 6.8 to 9.6 kΩ, depending on model
- Reverse polarity on the inputs: Protection
- Paralleling of outputs: Yes, for a maximum of 2 outputs for module BMXDDM16022 and a maximum of 3 outputs for module BMXDDM3202K

(1) This characteristic allows several inputs to be wired in parallel on the same module or on different modules for input redundancy.

BMXDDI1602  
BMXDAl●●●●

BMXDDI3202K



BMXDDI6402K

**References****Discrete input modules (1)**

| Type of current | Input voltage  | Connection via (2)  | IEC/EN 61131-2 conformity   | No. of channels (common)    | Reference    | Weight kg/lb |
|-----------------|--|---|-----------------------------|-----------------------------|--------------|--------------|
| ---             | 24 V (positive logic)                                | Caged, screw or spring-type 20-way removable terminal block | Type 3                      | 16 isolated inputs (1 x 16) | BMXDDI1602   | 0.115/ 0.254 |
|                 |  | One 40-way connector  | Type 3                      | 32 isolated inputs (2 x 16) | BMXDDI3202K  | 0.110/ 0.243 |
|                 |  | Two 40-way connectors                                       | Non-IEC                     | 64 isolated inputs (4 x 16) | BMXDDI6402K  | 0.145/ 0.320 |
| ~               | 24 V (negative logic)                                | Caged, screw or spring-type 20-way removable terminal block | Non-IEC                     | 16 isolated inputs (1 x 16) | BMXDAl1602   | 0.115/ 0.254 |
|                 | 48 V (positive logic)                                | Caged, screw or spring-type 20-way removable terminal block | Type 1                      | 16 isolated inputs (1 x 16) | BMXDDI1603   | 0.115/ 0.254 |
|                 | 125 V (positive logic)                               | Caged, screw or spring-type 20-way removable terminal block |                             | 16 isolated inputs (1 x 16) | BMXDDI1604T  | 0.144/ 0.317 |
|                 | 24 V   | Caged, screw or spring-type 20-way removable terminal block | Type 1                      | 16 isolated inputs (1 x 16) | BMXDAl1602   | 0.115/ 0.254 |
|                 | 48 V   | Caged, screw or spring-type 20-way removable terminal block | Type 3                      | 16 isolated inputs (1 x 16) | BMXDAl1603   | 0.115/ 0.254 |
|                 | 100...120 V  | Caged, screw or spring-type 20-way removable terminal block | Type 3                      | 16 isolated inputs (1 x 16) | BMXDAl1604   | 0.115/ 0.254 |
| 200...240 V     | Caged or spring-type 40-way removable terminal block | Type 1  | 16 isolated inputs (1 x 16) | BMXDAl1614                  | 0.150/ 0.331 |              |
|                 |  | Type 2  | 8 isolated inputs (1 x 8)   | BMXDAl0805                  | 0.152/ 0.335 |              |
|                 | Caged or spring-type 40-way removable terminal block | Type 1  | 16 isolated inputs (1 x 16) | BMXDAl1615                  | 0.156/ 0.344 |              |
|                 |  | Type 3  | 8 isolated inputs (8 x 1)   | BMXDAl0814                  | 0.115/ 0.254 |              |



BMXDDO1602

BMXDRA0815/  
0805/1605

BMXDDO3202K



BMXDDO6402K

**Discrete output modules (1)**

| Type of current | Output voltage                            | Connection via (2)   | IEC/EN 61131-2 conformity | No. of channels (common)                                | Reference   | Weight kg/lb |
|-----------------|---|--|---------------------------|---|-------------|--------------|
| ---             | 24 V/0.5 A (positive logic)               | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 16 protected outputs (1 x 16)                           | BMXDDO1602  | 0.120/ 0.265 |
|                 |   | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 16 protected outputs (1 x 16)                           | BMXDDO1612  | 0.120/ 0.265 |
|                 | 24 V/0.1 A (positive logic)               | One 40-way connector   | Yes                       | 32 protected outputs (2 x 16)                           | BMXDDO3202K | 0.110/ 0.243 |
| ~ triac         | 100...240 V                               | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 64 protected outputs (4 x 16)                           | BMXDDO6402K | 0.150/ 0.331 |
|                 |   | 40-way removable terminal block, caged or spring-type        | Yes                       | 16 outputs (4 x 4)                                      | BMXDAl1605  | 0.140/ 0.309 |
|                 | 24...240 V                                | 40-way removable terminal block, caged or spring-type        | Yes                       | 16 isolated outputs                                     | BMXDAl1615  | 0.250/ 0.551 |
| --- relay       | 100...150 V ---/ 0.3 A                    | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 8 non-protected outputs                                 | BMXDRA0804T | 0.178/ 0.392 |
|                 |   | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 8 non-protected outputs (without common)                | BMXDRA0805  | 0.145/ 0.320 |
|                 | 24...240 V ~/2 A<br>24...125 V ---/ 0.3 A | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 8 normally open isolated relay outputs                  | BMXDRA0815  | 0.210/ 0.463 |
| --- or ~ relay  | 24 V ---/2 A<br>24...240 V ~/2 A          | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 16 non-protected outputs (2 x 8)                        | BMXDRA1605  | 0.150/ 0.331 |
|                 |   | 20-way removable terminal block, caged, screw or spring-type | Yes                       | 8 normally open/ normally closed isolated relay outputs | BMXDRC0805  | 0.189/ 0.417 |
|                 | 24...240 V ~/2 A<br>5...125 V ---/ 0.3 A  | 40-way removable terminal block, caged or spring-type        | Yes                       |   |             |              |

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) 64-channel modules have 2 connectors and therefore require 2 connection cables.




BMXDDM1602 • BMXDDM3202K

## References (continued)

## Discrete mixed I/O modules (1)

| Number of connection I/O | No. of input channels (common)                              | No. of output channels (common) | IEC/EN 61131-2 conformity                       | Reference      | Weight kg/lb                   |
|--------------------------|---|---------------------------------|---|----------------|--------------------------------|
| 16                       | Caged, screw or spring-type 20-way removable terminal block | 8 (positive logic)<br>(1 x 8)   | 8, transistor<br>24 V .../0.5 A<br>(1 x 8)      | Inputs, type 3 | BMXDDM16022<br>0.115/<br>0.254 |
|                          |   |                                 | 8, relay 24 V ... or<br>24...240 V ~<br>(1 x 8) | Inputs, type 3 | BMXDDM16025<br>0.135/<br>0.298 |
| 32                       | One 40-way connector  | 16 (positive logic)<br>(1 x 16) | 16, transistor<br>24 V .../0.1 A<br>(1 x 16)    | Inputs, type 3 | BMXDDM3202K<br>0.110/<br>0.243 |



BMXFTB2000

## Removable terminal blocks

| Description                      | For use with   | Type        | Reference  | Weight kg/lb    |
|----------------------------------|--|-------------|------------|-----------------|
| 20-way removable terminal blocks | For module with 20-way removable terminal block                          | Caged       | BMXFTB2000 | 0.093/<br>0.205 |
|                                  |  | Screw clamp | BMXFTB2010 | 0.075/<br>0.165 |
|                                  |  | Spring      | BMXFTB2020 | 0.060/<br>0.132 |
| 40-way removable terminal blocks | For standard version of module only with 40-way removable terminal block | Caged       | BMXFTB4000 | 0.166/<br>0.366 |
|                                  |  | Spring      | BMXFTB4020 | 0.098/<br>0.216 |



BMXFTW01

## Preassembled cordsets for 16-channel I/O modules with removable terminal block

| Description   | Composition  | Cross-section                     | Length m/ft | Reference  | Weight kg/lb    |
|---|--|-----------------------------------|-------------|------------|-----------------|
| Preassembled cordsets with one end with flying leads for 16-channel I/O modules<br>Operating voltage ≤ 48 V | One 20-way spring-type removable terminal block (BMXFTB2020) and one end with color-coded flying leads | 0.324 mm <sup>2</sup> /<br>AWG 22 | 3/9.84      | BMXFTW301  | 0.850/<br>1.874 |
|   |  |                                   | 5/16.40     | BMXFTW501  | 1.400/<br>3.086 |
|   |  |                                   | 10/32.81    | BMXFTW1001 | 2.780/<br>6.129 |



BMXF CW01

## Preassembled cordsets for 16, 32 and 64-channel I/O modules with 40-way connectors

| Description  | No. of sheaths             | Composition  | Cross-section                     | Length m/ft | Reference   | Weight kg/lb    |
|--|----------------------------|--|-----------------------------------|-------------|-------------|-----------------|
| Preassembled cordsets with one end with flying leads | 1 x 20 wires (16 channels) | One 40-way connector and one end with color-coded flying leads | 0.324 mm <sup>2</sup> /<br>AWG 22 | 3/9.84      | BMXF CW301  | 0.820/<br>1.808 |
|  |                            |  |                                   | 5/16.40     | BMXF CW501  | 1.370/<br>3.020 |
|  |                            |  |                                   | 10/32.81    | BMXF CW1001 | 2.770/<br>6.107 |



BMXF CW03

| Description  | No. of sheaths             | Composition   | Cross-section                     | Length m/ft | Reference   | Weight kg/lb    |
|--|----------------------------|---|-----------------------------------|-------------|-------------|-----------------|
| Preassembled cordsets with one end with flying leads | 2 x 20 wires (32 channels) | One 40-way connector and two ends with color-coded flying leads | 0.324 mm <sup>2</sup> /<br>AWG 22 | 3/9.84      | BMXF CW303  | 0.900/<br>1.984 |
|  |                            |   |                                   | 5/16.40     | BMXF CW503  | 1.490/<br>3.285 |
|  |                            |   |                                   | 10/32.81    | BMXF CW1003 | 2.960/<br>6.526 |



BMXF CC01

| Description  | No. of sheaths             | Composition                                   | Cross-section                     | Length m/ft | Reference   | Weight kg/lb    |
|--|----------------------------|---|-----------------------------------|-------------|-------------|-----------------|
| Preassembled cordsets for 1 x 20 wires (16 channels) and one HE 10 connector | 2 x 20 wires (32 channels) | One 40-way connector and one HE 10 connector  | 0.324 mm <sup>2</sup> /<br>AWG 22 | 0.5/1.64    | BMXF CC051  | 0.140/<br>0.309 |
|  |                            |   |                                   | 1/3.28      | BMXF CC101  | 0.195/<br>0.430 |
|  |                            |   |                                   | 2/6.56      | BMXF CC201  | 0.560/<br>1.235 |
| Preassembled cordsets for 1 x 20 wires (16 channels) and one HE 10 connector | 2 x 20 wires (32 channels) | One 40-way connector and two HE 10 connectors | 0.324 mm <sup>2</sup> /<br>AWG 22 | 3/9.84      | BMXF CC301  | 0.840/<br>1.852 |
|  |                            |   |                                   | 5/16.40     | BMXF CC501  | 1.390/<br>3.064 |
|  |                            |   |                                   | 10/32.81    | BMXF CC1001 | 2.780/<br>6.123 |
| Preassembled cordsets for 1 x 20 wires (16 channels) and one HE 10 connector | 2 x 20 wires (32 channels) | One 40-way connector and one HE 10 connector  | 0.324 mm <sup>2</sup> /<br>AWG 22 | 0.5/1.64    | BMXF CC053  | 0.210/<br>0.463 |
|  |                            |   |                                   | 1/3.28      | BMXF CC103  | 0.350/<br>0.772 |
|  |                            |   |                                   | 2/6.56      | BMXF CC203  | 0.630/<br>1.389 |
| Preassembled cordsets for 1 x 20 wires (16 channels) and one HE 10 connector | 2 x 20 wires (32 channels) | One 40-way connector and two HE 10 connectors | 0.324 mm <sup>2</sup> /<br>AWG 22 | 3/9.84      | BMXF CC303  | 0.940/<br>2.072 |
|  |                            |   |                                   | 5/16.40     | BMXF CC503  | 1.530/<br>3.373 |
|  |                            |   |                                   | 10/32.81    | BMXF CC1003 | 3.000/<br>6.614 |

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) 64-channel modules have 2 connectors and therefore require 2 connection cables.

## Modicon X80 I/O platform

Analog I/O modules  
Input modules

| Applications  |   | Analog inputs   |                           |
|---|---|---|---------------------------|
|  |   |    |                           |
| <b>Type of input</b>  |   | Isolated low-level inputs, voltage, thermocouples, temperature probes, resistors  |                           |
| <b>Type</b>   |   | Multirange  |                           |
| <b>Range</b>  | Voltage                                       | $\pm 40 \text{ mV}, \pm 80 \text{ mV}, \pm 160 \text{ mV}, \pm 320 \text{ mV}, \pm 640 \text{ mV}, \pm 1.28 \text{ V}$  |                           |
|   | Current                                       | –   |                           |
|   | Thermocouple<br>Temperature probe<br>Resistor | Thermocouples, type B, E, J, K, L, N, R, S, T, U<br>2, 3 or 4-wire temperature probes, type Pt100, JPt100, Pt1000, JPt1000, Ni100, Ni1000<br>(in accordance with DIN43760) and Cu 10<br>2, 3 or 4-wire resistors, 400 $\Omega$ or 4000 $\Omega$ |                           |
| <b>Modularity</b>   |   | 4 inputs  | 8 inputs                  |
| <b>Acquisition period</b>   |   | 400 ms for the 4 inputs   | 400 ms for the 8 inputs   |
| <b>Conversion time</b>  |   | –   |                           |
| <b>Resolution</b>   |   | 15 bits + sign  |                           |
| <b>Isolation</b>  | Between channels                              | 750 V $\text{---}$  |                           |
|   | Between channels and bus                      | 1400 V $\text{---}$   |                           |
|   | Between channels and ground                   | 750 V $\text{---}$  |                           |
| <b>Connection</b>   | Directly to the module                        | Via 40-way connector  | Via two 40-way connectors |
|   | Via preassembled cordsets                     | Cordsets with one end with color-coded flying leads<br>BMXFCA•01S (3 or 5 m/9.84 or 16.40 ft long)  |                           |
| <b>Compatibility with Modicon Telefast ABE7 pre-wired system (1)</b>              | Connection sub-base                           | 4-channel sub-base for direct connection of 4 thermocouples plus connection and provision of cold junction compensation   |                           |
|   | Type of connection sub-base                   | ABE7CPA412  |                           |
|   | Type of preassembled cordsets                 | BMXFCA•02<br>(1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)  |                           |
| <b>References</b>   |   | <b>BMXART0414</b>   | <b>BMXART0814</b>         |
| <b>Pages</b>  |   | 3/22  |                           |

(1) For more information, please refer to the "Telefast Pre-wired system -- Modicon ABE7 IP20 connection sub-bases" catalog or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

| Analog inputs  |  |
|--|--|
|                                 |  |
| <b>Isolated high-level inputs</b>  |  |
| Voltage/current  |  |
| $\pm 10 \text{ V}, 0...10 \text{ V}, 0...5 \text{ V}, 1...5 \text{ V}, \pm 5 \text{ V}$                            |  |
| 0...20 mA, 4...20 mA, $\pm 20 \text{ mA}$  |  |
| –  |  |
| 4 inputs   |  |
| Fast: 1 + (1 x no. of declared channels) ms<br>Default: 5 ms for the 4 channels                                    |  |
| 16 bits  |  |
| 300 V $\text{---}$   |  |
| 1400 V $\text{---}$  |  |
| 1400 V $\text{---}$  |  |
| Via 20-way removable terminal block (caged, screw or spring-type) BMXFTB20•0                                       |  |
| Cordsets with one end with color-coded flying leads<br>BMXFTW•01S (3 or 5 m/9.84 or 16.40 ft long)                 |  |
| 4-channel sub-base for direct connection of 4 inputs, delivers and distributes 4 protected isolated power supplies |  |
| ABE7CPA410   |  |
| BMXFCA•00<br>(1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)   |  |
| 8-channel sub-base for direct connection of 8 current/voltage inputs   |  |
| ABE7CPA02/03/31/31E  |  |
| BMXFCA•00<br>(1.5 or 3 m/4.92, 9.84 or 16.40 ft long)  |  |
| <b>Non-isolated high-level inputs</b>  |  |
| –  |  |
| 8 inputs   |  |
| Fast: 1 + (1 x no. of declared channels) ms<br>Default: 9 ms for the 8 channels                                    |  |
| 15 bits + sign   |  |
| –  |  |
| 300 V $\text{---}$   |  |
| 1400 V $\text{---}$  |  |
| 1400 V $\text{---}$  |  |
| Via 28-way removable terminal block (caged) BMXFTB2800 or (spring) BMXFTB2820                                      |  |
| Cordsets with one end with color-coded flying leads<br>BMXFTW•08S (3 or 5 m/9.84 or 16.40 ft long)                 |  |
| 8-channel sub-base for direct connection of 8 current/voltage inputs   |  |
| ABE7CPA02/31/31E   |  |
| BMXFCA•00<br>(1.5 or 3 m/4.92, 9.84 or 16.40 ft long)  |  |
| <b>Isolated high-level inputs</b>  |  |
| –  |  |

3/22

# Modicon X80 I/O platform

Analog I/O modules

Output modules and mixed I/O modules

## Applications

### Analog outputs



## Type of I/O

### Type

### Range

Voltage

Current

## Modularity

### Acquisition period (inputs)

### Conversion time (outputs)

### Resolution

Inputs

Outputs

## Isolation

## Connection

Directly to the module

Via preassembled cordsets

### Compatibility with Modicon Telefast ABE7 pre-wired system (1)

Connection sub-base

Type of connection sub-base

4-channel sub-base for direct connection of 2/4 current/voltage outputs

8-channel sub-base for direct connection of 8 current/voltage inputs

ABE7CPA02

BMXFCA●●0 (1.5, 3 or 5 m/4.92, 9.84 or 16.40 ft long)

BMXFTA●●2 (1.5 or 3 m/4.92, 9.84 or 16.40 ft long)

## References

**BMXAMO0210**

**BMXAMO0410**

**BMXAMO0802**

## Pages

3/22

(1) For more information, please refer to the "Telefast Pre-wired system – Modicon ABE7 IP20 connection sub-bases" catalog or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

## Mixed analog I/O



## Non-isolated high-level inputs and outputs

### Voltage/current

Inputs: ± 10 V, 0...10 V, 0...5 V, 1...5 V  
Outputs: ± 10 V

Inputs: 0–20 mA, 4–20 mA  
Outputs: 0–20 mA, 4–20 mA

4 inputs and 2 outputs

Fast: 1 + (1 x no. of declared channels) ms  
Default: 5 ms for the 4 channels

≤ 1 ms

14...12-bit in U range  
12-bit in I range

12-bit in U range  
11-bit in I range

Between groups of input or output channels: 750 V □□

Between channels and bus: 1400 V □□

Between channels and ground: 1400 V □□

Via 20-way removable terminal block (screw or spring-type) BMXFTB20●0

BMXFTW●01S cordsets with one end with color-coded flying leads (3 or 5 m/9.84 or 16.40 ft long)

–

–

–

## BMXAMM0600

### 3/22



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)



More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

### Presentation

The Modicon X80 I/O analog I/O module offer comprises:

- 5 analog input modules:
  - 2 modules with 4 and 8 isolated channels, low-level voltage, thermocouples, Pt, JPt, Ni, or Cu temperature probes and resistors, 15 bits + sign **BMXART0414/0814**
  - 1 module with 4 high-speed isolated analog channels, high-level voltage or current, 16 bits **BMXAMI0410**
  - 2 modules with 8 high-speed non-isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMI0800/0810**
- 3 analog output modules:
  - 1 module with 2 isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMO0210**
  - 1 module with 4 isolated analog channels, high-level voltage or current, 15 bits + sign **BMXAMO0410**
  - 1 module with 8 non-isolated analog channels, high-level current, 15 bits + sign **BMXAMO0802**
- 1 mixed analog I/O module with 4 input channels and 2 output channels (non-isolated), voltage or current, 12 to 14 bits according to type of channel and range **BMXAMM0600**

Analog I/O modules are equipped with a connector for a 20 or 28-way removable terminal block, except for **BMXART0414/0814** analog input modules for thermocouples/temperature probes, which are equipped with one or two 40-way connector(s).

All analog modules occupy a single slot in **BMEXBP\*\*\*** or **BMXXBP\*\*\*** racks. These modules can be installed in any slot in the rack, except the first two (PS and 00), which are reserved for the power supply module and the processor module respectively.

The power supply for the analog functions is supplied by the backplane bus (3.3 V and 24 V). Analog I/O modules are hot-swappable (see page 3/10).

### Description

**BMXAM•ART** analog I/O modules are standard format (1 slot). They have a case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw.


### I/O modules connected via 20 or 28-way removable terminal block

**BMXAM•** analog I/O modules feature the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 A connector taking the 20 or 28-way removable screw or spring-type terminal block for directly connecting the sensors or preactuators to the module

#### To be ordered separately:

- 5 A **BMXFTB20•0** or **BMXFTB28•0** 20 or 28-way removable terminal block (referencing label supplied with each I/O module) or pre-wired cables with:
  - A 20-way terminal block at one end and flying leads at the other (**BMXFTW•01S**)
  - A 28-way terminal block at one end and flying leads at the other (**BMXFTW•08S**)
  - A 20 or 28-way terminal block and a 25-way SUB-D connector (**BMXFCA••0** or **BMXFTA••0**), for connection to Modicon Telefast ABE7 sub-bases (see page 3/23).

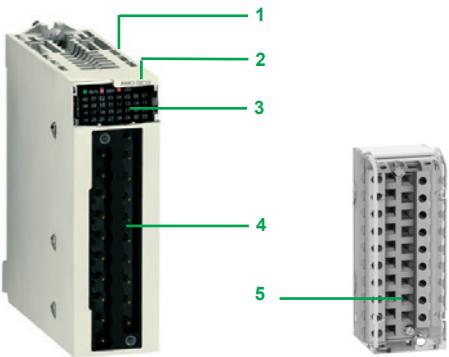

Module for connection via 20 or 28-way removable terminal block

### I/O modules connected via 40-way connector

**BMXART** analog input modules have the following on the front panel:


- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 One (or two) 40-way connector(s) for connecting the sensors

#### To be ordered separately:


- 5 Pre-wired cables with:
  - A 40-way connector at one end and flying leads at the other (**BMXFCW•01S**)
  - A 40-way connector and a 25-way SUB-D connector (**BMXFCA••2**) for direct connection to the Modicon Telefast ABE7 sub-bases (see page 3/23)

#### Must be ordered separately:



- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack supporting the analog modules
- A set of **STBXSP3020** clamping rings for the shielding braids of analog signal cables

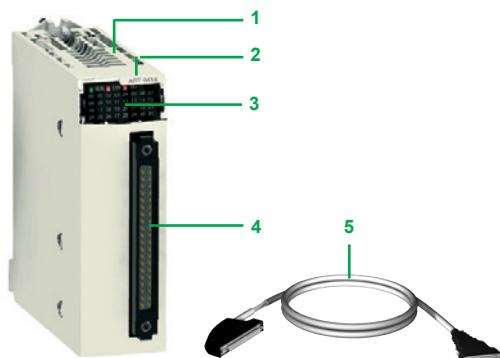

Module for connection for 40-way connector

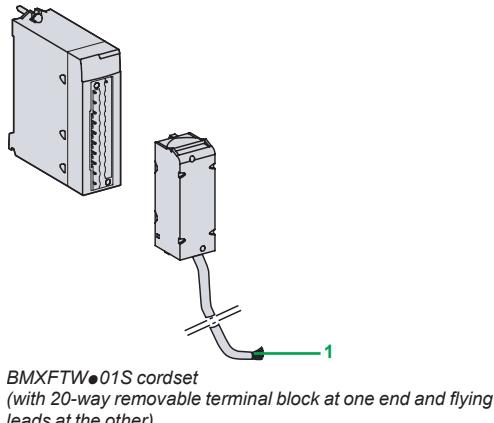

3

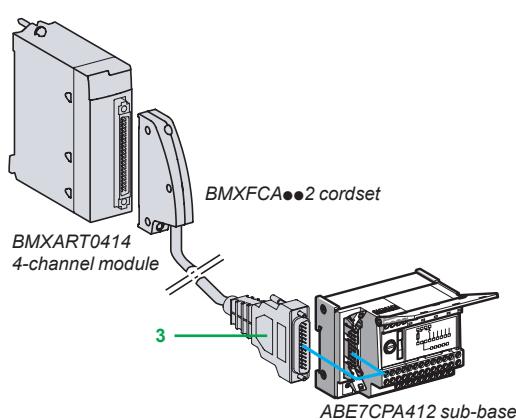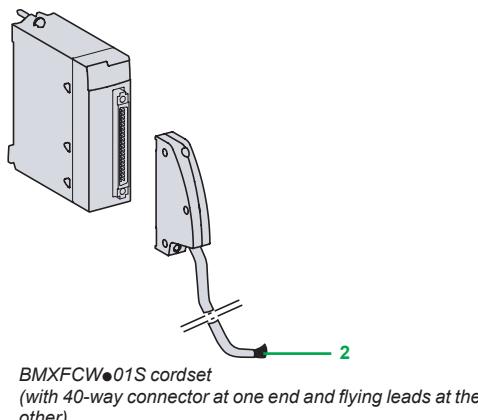

### Connecting modules with removable terminal blocks

#### BMXAMI0410, BMXAMO, and BMXAMM modules with 20-way terminal block

The 20-way removable terminal blocks (**BMXFTB20•0**) are the same as those used for discrete I/O modules (screw clamp, caged or spring-type) (see page 3/9). One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.40 ft cordset with color-coded flying leads (**BMXFTW•01S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end **1**.

#### BMXAMI0800/0810 modules with 28-way terminal block

The 28-way removable terminal blocks are caged (**BMXFTB2800**) or spring-type (**BMXFTB2820**).

One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.40 ft cordset with color-coded flying leads (**BMXFTW•08S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end **1**.

### Connecting modules with 40-way connectors

#### BMXART0•14 modules with 40-way connectors

**Two types of cordset are available:**

- Preassembled cordsets with reinforced shielding (**BMXFCW•01S**) which have color-coded flying leads at the other end **2**. Available in 3 or 5 m/9.84 or 16.40 ft lengths, they enable easy direct wire-to-wire connection of the analog sensors via terminal blocks.
- Preassembled cordsets with reinforced shielding (**BMXFCA•02**) which have a 25-way SUB-D connector at the other end **3**. Available in 1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft lengths, they enable direct connection to the Modicon Telefast **ABE7CPA412** sub-base (see below).

### Use with Modicon Telefast ABE7 sub-bases

Using the Modicon Telefast ABE7 pre-wired system makes it easier to install the modules since the inputs (or outputs) can be accessed via screw terminals. 7 special sub-bases are available:

#### Modicon Telefast ABE7CPA410 sub-base

The Modicon Telefast ABE7CPA410 sub-base is mainly used in conjunction with the **BMXAMI0410** voltage/current analog 4-input module. This sub-base allows you to:

- Directly connect 4 sensors
- Remotely locate the input terminals in voltage mode
- Power the 4 to 20 mA conditioning units one channel at a time with a 24 V voltage, protected and limited to 25 mA, while maintaining isolation between channels
- Help protect the current impedance matching resistors integrated in the sub-base against overvoltages

Connection is via the **BMXFCA••0** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

#### Modicon Telefast ABE7CPA412 sub-base

The Modicon Telefast ABE7CPA412 sub-base is specially designed as a wiring interface for the **BMXART0414** and **BMXART0814** thermocouple modules. This sub-base allows you to:

- Connect 4 thermocouple probes
- Provide external cold junction compensation with a temperature probe integrated in the sub-base
- Provide continuity of the shielding

The **BMXART0814** module requires two Modicon Telefast **ABE7CPA412** sub-bases. The connection with each sub-base is made via a **BMXFCA••2** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

#### Modicon Telefast ABE7CPA21 sub-base

The Modicon Telefast ABE7CPA21 sub-base is compatible with the **BMXAMO0210** output module. This sub-base allows you to:

- Directly connect 2 current/voltage outputs
- Provide continuity of the shielding

Connection is via the **BMXFCA••0** cordset **3** (1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long).

### Use with Modicon Telefast ABE7 sub-bases (continued)

#### Modicon Telefast ABE7CPA02 sub-base

The Modicon Telefast **ABE7CPA02** sub-base can be used in combination with:

- The **BMXAMI0800/0810** analog current input modules with 8 inputs
- The **BMXAMO0802** analog current output modules with 8 outputs

This sub-base allows you to:

- Connect the 8 analog inputs or outputs point-to-point
- Provide continuity of the shielding

The **BMXAMI0800/0810** modules are connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

The **BMXAMO0802** module is connected by means of the 1.5, 3, or 5 m/4.92, 9.84, or 16.40 ft long **BMXFTA●●2** cables.

#### Modicon Telefast ABE7CPA03 sub-base

The Modicon Telefast **ABE7CPA03** sub-base can be used in combination with the **BMXAMI0800** voltage/current analog 8-input module.

This sub-base allows you to:

- Directly connect 8 analog inputs
- Power the current inputs one channel at a time with a voltage of 24 V that is protected and limited to 25 mA
- Provide continuity of the shielding

The **BMXAMI0800** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

#### Modicon Telefast ABE7CPA31/31E sub-bases

The Modicon Telefast **ABE7CPA31/31E** sub-bases can be used in combination with the **BMXAMI0800/0810** voltage/current analog 8-input modules.

These sub-bases allow you to:

- Directly connect 8 analog inputs
- Power the current inputs one channel at a time with 24 V converters
- Provide continuity of the shielding

The **BMXAMI0800/0810** modules are connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA●●0** cables.

### Complementary characteristics

#### BMXART0414/0814 analog input modules

The **BMXART0414/0814** modules are multirange input modules with 4 or 8 low-level isolated inputs (15 bits + sign) respectively.

Depending on the choice made during configuration, the modules offer, for each of the inputs, the following ranges:

- Temperature probe: Pt100, JPt100, Pt1000, JPt1000, Cu10, Ni100, or Ni1000 (in accordance with DIN43760), with open-circuit detection
- Thermocouple: B, E, J, K, L, N, R, S, T, or U with broken wire detection
- Resistor: 0...400 or 0...4000 Ω, 2, 3, or 4-wire
- Voltage: ± 40 mV, ± 80 mV, ± 160 mV, ± 320 mV, ± 640 mV, ± 1.28 V

#### BMXAMI0410 analog input modules

The **BMXAMI0410** module is a high-level analog input module with 4 isolated inputs (16 bits).

Used with sensors or transmitters, it performs monitoring, measurement, and process control functions for continuous processes.

The module offers the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage ± 10 V, ± 5 V, 0...10 V, 0...5 V, and 1...5 V
- Current 0–20 mA, 4–20 mA, and ± 20 mA

#### BMXAMI0800/0810 analog input modules

**BMXAMI0800/0810** analog input modules are modules with 8 high-level isolated/non-isolated analog inputs (15 bits + sign).

The modules offer the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage: ± 10 V, 0...10 V, 0...5 V, 1...5 V, ± 5 V
- Current: 0–20 mA and 4–20 mA

**Complementary characteristics (continued)**

**BMXAMO0210 analog output module**

The **BMXAMO0210** module is a module with 2 high-level isolated outputs (15 bits + sign).

The **BMXAMO0210** module offers the following ranges for each of the inputs depending on the choice made during configuration:

- Voltage:  $\pm 10$  V
- Current: 0–20 mA and 4–20 mA

**BMXAMO0410/0802 analog output modules**

The **BMXAMO0410/0802** analog output modules are modules with 4 or 8 high-level isolated/non-isolated analog outputs (16 bits/15 bits + sign).

The **BMXAMO0410** module offers the following ranges for each of the outputs depending on the choice made during configuration:

- Voltage:  $\pm 10$  V
- Current: 0–20 mA and 4–20 mA

The **BMXAMO0802** module offers the current ranges 0–20 mA and 4–20 mA.

**BMXAMM0600 analog mixed I/O module**

The **BMXAMM0600** mixed module is a non-isolated I/O module with 4 inputs (14/12 bits) and 2 outputs (12 bits).

The module offers the following ranges for each of the inputs or outputs depending on the choice made during configuration:

- Voltage:  $\pm 10$  V, 0...10 V, 0...5 V, and 1...5 V
- Current: 0–20 mA and 4–20 mA

**References**

**Analog input modules (1)**

| Type of input                  | Input signal range  | Resolution     | Connection   | No. of channels | Reference  | Weight kg/lb |
|--------------------------------|---|----------------|--|-----------------|------------|--------------|
| Isolated high-level inputs     | $\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, $\pm 5$ V, 0–20 mA, 4–20 mA, $\pm 20$ mA                                  | 16 bits        | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 4 channels      | BMXAMI0410 | 0.143/0.315  |
| Non-isolated high-level inputs | $\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, $\pm 5$ V, 0–20 mA  | 15 bits + sign | Removable terminal block, 28-way, caged or spring-type               | 8 channels      | BMXAMI0800 | 0.175/0.386  |
| Isolated high-level inputs     | $\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, $\pm 5$ V, 0–20 mA  | 15 bits + sign | Removable terminal block, 28 way, caged or spring-type               | 8 channels      | BMXAMI0810 | 0.175/0.386  |
| Isolated low-level inputs      | Temperature probe, thermocouple, $\pm 40$ mV, $\pm 80$ mV, $\pm 160$ mV, $\pm 320$ mV, $\pm 640$ mV, $\pm 1.28$ V | 15 bits + sign | 40-way connector   | 4 channels      | BMXART0414 | 0.135/0.298  |
|                                |   |                |  | 8 channels      | BMXART0814 | 0.165/0.364  |



BMXAMM0600



BMXART0414


**Analog output modules (1)**

| Type of outputs                | Output signal range                       | Resolution     | Connection   | No. of channels | Reference  | Weight kg/lb |
|--------------------------------|---|----------------|--|-----------------|------------|--------------|
| Isolated high-level outputs    | $\pm 10$ V, 0–20 mA, 4–20 mA              | 16 bits        | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 2 channels      | BMXAMO0210 | 0.144/0.317  |
| High-level outputs isolated    | $\pm 10$ V, 0–20 mA, 4–20 mA, $\pm 20$ mA | 15 bits + sign | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 4 channels      | BMXAMO0410 | 0.175/0.386  |
| Non-isolated high-level inputs | 0–20 mA, 4–20 mA                          | 15 bits + sign | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 8 channels      | BMXAMO0802 | 0.175/0.386  |

**Analog mixed I/O module (1)**

| Type of I/O             | Signal range   | Resolution                                | Connection   | No. of channels                           | Reference  | Weight kg/lb |
|-------------------------|--|---|--|---|------------|--------------|
| Mixed I/O, non-isolated | $\pm 10$ V, 0...10 V, 0...5 V, 1...5 V, 0–20 mA, 4–20 mA | 14 bits or 12 bits depending on the range | Removable terminal block, 20-way, caged, screw clamp, or spring-type | Inputs: 4 channels<br>Outputs: 2 channels | BMXAMM0600 | 0.155/0.342  |

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).



BMXFTB20•0



BMXFTW•01S



ABE7CPA41•21



BMXFCA••0



BMXFCA••2

#### References (continued)

##### Connection accessories for analog modules (1)

| Description  | For use with modules | Type, composition  | Length        | Reference         | Weight kg/lb |
|--|----------------------|--|---------------|-------------------|--------------|
| <b>20-way removable terminal blocks</b>                          | BMXAMI0410           | Caged  | —             | <b>BMXFTB2000</b> | 0.093/0.205  |
|  | BMXAMO0210           | Screw clamp  | —             | <b>BMXFTB2010</b> | 0.075/0.165  |
|  | BMXAMO0410           | Spring   | —             | <b>BMXFTB2020</b> | 0.060/0.132  |
| <b>28-way removable terminal block</b>                           | BMXAMI0800           | Caged  | —             | <b>BMXFTB2800</b> | 0.111/0.245  |
|  | BMXAMI0810           | Spring   | —             | <b>BMXFTB2820</b> | 0.080/0.176  |
| <b>Preassembled cordsets</b>                                     | BMXAMI0410           | One 20-way terminal block (BMXFTB2020) and one end with color-coded flying leads                     | 3 m/9.84 ft   | <b>BMXFTW301S</b> | 0.470/1.036  |
|  | BMXAMO0210           |  | 5 m/16.40 ft  | <b>BMXFTW501S</b> | 0.700/1.543  |
| <b>ABE7CPA41•21</b>  | BMXAMI0410           | BMXAMO0410   | 3 m/9.84 ft   | <b>BMXFTW308S</b> | 0.435/0.959  |
|  | BMXAMO0802           | BMXAMM0600   | 5 m/16.40 ft  | <b>BMXFTW508S</b> | 0.750/1.653  |
| <b>BMXFCA••0</b>   | BMXAMI0800           | 1 removable terminal block, 28-way, MX FTB 2820, and one end with color-coded flying leads           | 3 m/9.84 ft   | <b>BMXFCA150</b>  | 0.320/0.705  |
|  | BMXAMI0810           |  | 5 m/16.40 ft  | <b>BMXFCA300</b>  | 0.500/1.102  |
| <b>BMXFCA••2</b>   | BMXART0414           | One 40-way connector and one end with color-coded flying leads                                       | 3 m/9.84 ft   | <b>BMXFCA152</b>  | 0.330/0.728  |
|  | BMXART0814           |  | 5 m/16.40 ft  | <b>BMXFCA302</b>  | 0.510/1.124  |
| <b>Preassembled cordsets for Modicon Telefast ABE7 sub-bases</b> | BMXAMI0410           | One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA410/CPA21 sub-base     | 1.5 m/4.92 ft | <b>BMXFCA500</b>  | 0.730/1.609  |
|  | BMXAMO0210           |  | 3 m/9.84 ft   | <b>BMXFCA502</b>  | 0.740/1.631  |
| <b>ABE7CPA41•21</b>  | BMXAMI0800           | BMXAMI0810   | 1.5 m/4.92 ft | <b>BMXFCA150</b>  | 0.374/0.825  |
|  | BMXAMI0802           |  | 3 m/9.84 ft   | <b>BMXFCA300</b>  | 0.500/1.102  |
| <b>ABE7CPA41•21</b>  | BMXART0414           | One 40-way connector and one 25-way SUB-D connector for ABE7CPA412 sub-base                          | 1.5 m/4.92 ft | <b>BMXFCA152</b>  | 0.330/0.728  |
|  | BMXART0814 (2)       |  | 3 m/9.84 ft   | <b>BMXFCA302</b>  | 0.510/1.124  |
| <b>ABE7CPA41•21</b>  | BMXAMI0800           | BMXAMI0810   | 1.5 m/4.92 ft | <b>BMXFCA500</b>  | 0.730/1.609  |
|  | BMXAMI0802           |  | 5 m/16.40 ft  | <b>BMXFCA502</b>  | 0.740/1.631  |
| <b>ABE7CPA41•21</b>  | BMXAMI0800           | One 28-way removable terminal block and one 25-way SUB-D connector for sub-bases ABE7CPA02/03/31/31E | 1.5 m/4.92 ft | <b>BMXFTA150</b>  | 0.374/0.825  |
|  | BMXAMI0810           |  | 3 m/9.84 ft   | <b>BMXFTA300</b>  | 0.500/1.102  |
| <b>ABE7CPA41•21</b>  | BMXAMO0802           | One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA02 sub-bases           | 1.5 m/4.92 ft | <b>BMXFTA152</b>  | 0.374/0.825  |
|  |                      |  | 3 m/9.84 ft   | <b>BMXFTA302</b>  | 0.500/1.102  |

(1) The shielding on the cordsets carrying the analog signals must always be connected to the BMXXSP••000 shielding connection kit mounted under the rack holding the analog modules (see page 2/3).

(2) The BMXART0814 8-channel module requires two ABE7CPA412 sub-bases and two BMXFCA••2 cordsets.


# Modicon X80 I/O platform

## HART analog I/O modules

| Applications  |                               | HART analog inputs  |
|---|-------------------------------|---|
|  |                               |   |
| Type of I/O   |                               | Isolated analog inputs with HART  |
| Number of channels  | 8                             |   |
| Range   | Current                       | 4-20 mA   |
| Maximum load impedance  |                               | –   |
| Operating temperature   |                               | 0...60°C/32...140°F   |
| Compatible devices  |                               | BMEP58●●●● processors, BMECRA31210 drop module, BMEXBP●●0(H) Ethernet + X-bus backplanes, 140NOC78000 Quantum Ethernet DIO module |
| Resolution  |                               | 15 bits + sign  |
| Isolation   | Between channels              | 1000 V :: for 1 minute  |
|   | Between channels and bus      | 1400 V :: for 1 minute  |
|   | Between channels and earth    | 1400 V :: for 1 minute  |
| Connection  | Directly to the module        | Via 20-way removable terminal blocks (screw or spring-type) BMXFTB20●0  |
| Compatibility with pre-wired ABE7   | Connection sub-base           | 8-channel sub-base for direct connection of 8 current/voltage inputs  |
|   | Type of connection sub-base   | ABE7CPA02/03/31   |
|   | Type of preassembled cordsets | BMXFFTA1522/3022 (1.5 or 3 m/4.92 or 9.84 ft long)  |
| Field device support  |                               | 2-wire/4-wire   |
| HART specification  | HART field device compliance  | HART V5, V6, V7   |
|   | HART field device connection  | Point to point  |
|   | HART I/O mapping              | Yes   |
| References  | <b>BMEAHI0812</b>             |   |
| Page  | 3/27                          |   |

| HART analog outputs   |   |  |
|---|---|--|
|  |   |  |
| Isolated analog outputs with HART   |   |  |
| Number of channels  | 4   |  |
| Range   | 4-20 mA   |  |
| Maximum load impedance  | 600 Ω (0-20 mA)   |  |
| Operating temperature   | 0...60°C/32...140°F   |  |
| Compatible devices  | BMEP58●●●● processors, BMECRA31210 drop module, BMEXBP●●0(H) Ethernet + X-bus backplanes, 140NOC78000 Quantum Ethernet DIO module |  |
| Resolution  | 15 bits + sign  |  |
| Isolation   | 1000 V :: for 1 minute  |  |
|   | 1400 V :: for 1 minute  |  |
|   | 1400 V :: for 1 minute  |  |
| Connection  | Via 20-way removable terminal blocks (screw or spring-type) BMXFTB20●0  |  |
| Compatibility with pre-wired ABE7   | 4-channel sub-base for direct connection of 2/4 current/voltage outputs   |  |
|   | ABE7CPA21   |  |
|   | BMXFCA150/300/500 (1.5, 3 or 5 m/4.92, 9.84 or 16.4 ft long)  |  |
| Field device support  | 2-wire/4-wire   |  |
| HART specification  | HART V5, V6, V7   |  |
|   | Point to point  |  |
|   | Yes   |  |
| References  | <b>BMEAHO0412</b>   |  |
| Page  | 3/27  |  |

More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)More technical information on [www.schneider-electric.com](http://www.schneider-electric.com)

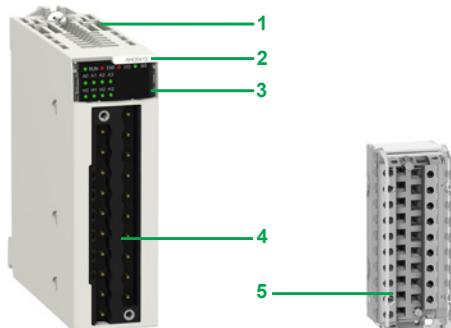

Module for connection via 20-way removable terminal block

3

### Presentation

**BMEAHI0812** HART analog I/O modules contain transceivers that master HART devices and information through the module. They can be managed by the AMS (Asset Management System) or by the automation platform CPU.

These modules require an Ethernet + X-bus backplane and can only be installed in the main local rack with the CPU or in RIO drops with a **BMECRA31210** performance EIO adapter module. They cannot be installed in expansion racks.

### Description

**BMEAHI0812** HART analog I/O modules are standard format (1 slot). They have a case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw. They are connected via a 20-way removable terminal block.

**BMEAHI0812** HART analog I/O modules feature the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 A connector taking the 20-way removable screw or spring-type terminal block for directly connecting the sensors or preactuators to the module

To be ordered separately:

- 5 A **BMXFTB20●0** 20-way removable terminal block  
(referencing label supplied with each I/O module) or pre-wired cables with:  
 A 20-way terminal block at one end and flying leads at the other (**BMXFTW●01S**)  
 A 20-way terminal block and a 25-way SUB-D connector (**BMXFCA●●0** or **BMXFTA●●22**), for connection to Modicon Telefast ABE 7 sub-bases



BMXFTW●01S



BMXFCA●●0

### Connecting modules using 20-way removable terminal blocks

The 20-way removable terminal blocks (**BMXFTB20●0**) are the same as those used for discrete I/O modules (screw clamp, caged or spring-type) (see page 3/13).

One version of the removable terminal block is equipped with a 3 or 5 m/9.84 or 16.4 ft cordset with color-coded flying leads (**BMXFTW●01S**). These preassembled cordsets with reinforced shielding have color-coded flying leads at the other end.

### Use with Modicon Telefast ABE7 sub-bases

#### Modicon Telefast ABE7CPA21 sub-base

The Modicon Telefast ABE7CPA21 sub-base is compatible with the **BMEAHO0412** output module.

This sub-base allows you to:

- Directly connect two current/voltage outputs
- Ensure continuity of the shielding

Connection is via the **BMXFCA●●0** cordset (1.5, 3, or 5 m/4.92, 9.84, or 16.4 ft long).

#### Modicon Telefast ABE7CPA02 sub-base

The Modicon Telefast ABE7CPA02 sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Connect the 8 analog inputs point-to-point
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables.

### Use with Modicon Telefast ABE7 sub-bases

#### Modicon Telefast ABE7CPA03 sub-base

The Modicon Telefast **ABE7CPA03** sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Directly connect the 8 analog inputs
- Power the current inputs one channel at a time with a voltage of 24 V that is protected and limited to 25 mA
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables (1).

#### Modicon Telefast ABE7CPA31 sub-base

The Modicon Telefast **ABE7CPA31** sub-base can be used with the **BMEAHI0812** HART analog input module.

This sub-base allows you to:

- Directly connect the 8 analog inputs
- Power the current inputs one channel at a time with 24 V converters
- Ensure continuity of the shielding

The **BMEAHI0812** module is connected by means of the 1.5 or 3 m/4.92 or 9.84 ft long **BMXFTA1522/3022** cables.

### Additional characteristics

#### BMEAHI0812 HART analog input module

The **BMEAHI0812** module is a module with 8 high-level isolated inputs (15 bits + sign).

The **BMEAHI0812** module offers the current range 4 - 20 mA for each of the inputs depending on the choice made during configuration.

#### BMEAHO0412 HART analog output module

The **BMEAHO0412** module is a module with 4 high-level isolated outputs (15 bits + sign).

The **BMEAHO0412** module offers the current range 4 - 20 mA for each of the outputs depending on the choice made during configuration.



**BMEAHI0812**

### References

#### HART analog input module

| Type of input              | Input signal range | Resolution     | Connection   | No. of channels | Reference         | Weight kg/lb |
|----------------------------|--------------------|----------------|--|-----------------|-------------------|--------------|
| Isolated high-level inputs | 4 - 20 mA          | 15 bits + sign | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 8 channels      | <b>BMEAHI0812</b> | 0.233/ 0.514 |

#### HART analog output module

| Type of input               | Output signal range | Resolution     | Connection   | No. of channels | Reference         | Weight kg/lb |
|-----------------------------|---------------------|----------------|--|-----------------|-------------------|--------------|
| Isolated high-level outputs | 4 - 20 mA           | 15 bits + sign | Removable terminal block, 20-way, caged, screw clamp, or spring-type | 4 channels      | <b>BMEAHO0412</b> | 0.223/ 0.492 |

(1) The **BMEAHI0812** HART analog input module loses its isolation between channels when connected to the Modicon Telefast **ABE7CPA03** sub-base.

### **Presentation**

**BMXEHC0200** and **BMXEHC0800** counter modules for the Modicon X80 I/O platform are used to count the pulses generated by a sensor or to process the signals from an incremental encoder.

The two modules differ in their number of counter channels, maximum input frequencies, functions, and auxiliary input and output interfaces:

| Counter module    | No. of channels | Maximum frequency | Integrated functions   | No. of physical inputs | No. of physical outputs |
|-------------------|-----------------|-------------------|--|------------------------|-------------------------|
| <b>BMXEHC0200</b> | 2               | 60 KHz            | Upcounting<br>Downcounting<br>Period meter<br>Frequency meter<br>Frequency generator<br>Axis control | 6                      | 2                       |
| <b>BMXEHC0800</b> | 8               | 10 KHz            | Upcounting<br>Downcounting<br>Measurement  | 2                      | –                       |

The sensors used on each channel can be:

- 2-wire 24 V proximity sensors
- 3-wire 24 V proximity sensors
- 10/30 V output signal incremental encoders with push-pull outputs

**BMXEHC0200/0800** counter modules can be used to meet the demands of applications such as:

- Alarm generation on empty unwinder status using the ratio
- Sorting small parts using the period meter
- Single electronic cam using the dynamic setting thresholds
- Speed control using the period meter

These standard format modules can be installed in any available slot of a Modicon X80 I/O PLC. They are hot-swappable.

In a Modicon X80 I/O PLC configuration, the number of **BMXEHC0200/0800** counter modules should be added to the number of application-specific modules (communication).

The function parameters are set by configuration using the Unity Pro software.


### **Description**

**BMXEHC0200/0800** counter modules are standard format. They occupy a single slot in **BM**•**XBP●●●** racks. They come in a plastic case, which provides IP 20 protection of the electronics, and are locked into position by a captive screw.

#### **BMXEHC0200 module, 2 channels, 60 KHz**

The front panel of the **BMXEHC0200** counter module features:

- 1 Module and channel status display block
- 2 16-way connector for connecting the sensors of counter 0
- 3 16-way connector for connecting the sensors of counter 1
- 4 10-way connector for connecting:
  - Auxiliary outputs
  - Sensor power supplies

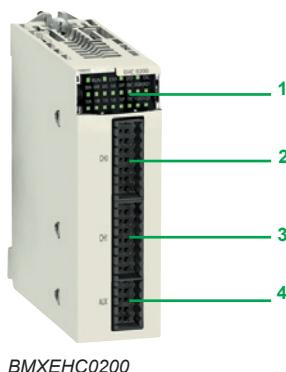

BMXEHC0200


#### **To be ordered separately:**

- A **BMXXTSHSC20** kit containing two 16-pin connectors and one 10-pin connector
- A **BMXXSP●●00** shielding connection kit if the rack is not already equipped with one (see page 2/3)

#### **BMXEHC0800 module, 8 channels, 10 KHz**

The front panel of the **BMXEHC0800** counter module features:

- 1 Module and channel status display block
- 2 Connector taking the **BMXFTB20●0** 20-way removable terminal block 3 (same as that of I/O modules)

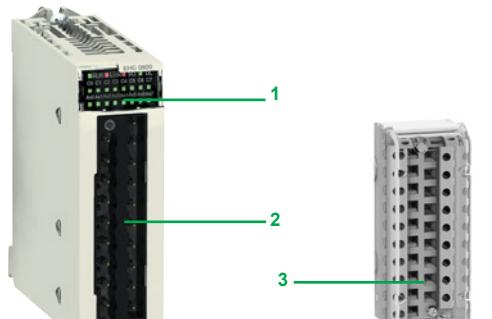

BMXEHC0800

BMXFTB20●0

#### **To be ordered separately:**

- A 20-way removable terminal block 3 (caged, screw clamp, or spring-type)
- A **BMXFTB20●0** shielding connection kit if the rack is not already equipped with one (see page 2/3)

### Operating modes for module BMXEHC0200

|                             |  |
|-----------------------------|--|
| <b>8 configurable modes</b> | <p>Frequency meter</p> <p>This mode measures a frequency, speed, data rate, or an event stream. As standard, this mode measures the frequency received on the IN_A input. This frequency is expressed in Hz (number of pulses/second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 60 kHz. The maximum cyclic ratio at 60 kHz is 60%.</p>  |
| Event counting              | <p>This mode is used to determine the number of events received. In this mode, the counter calculates the number of pulses applied to the IN_A input at time intervals defined by the user.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 5 µs (without anti-bounce filter).</p>  |
| Period measurement          | <p>This mode is used to:</p> <ul style="list-style-type: none"> <li>■ Determine the duration of an event</li> <li>■ Determine the time between 2 events</li> <li>■ Time and measure the execution time of a process</li> </ul> <p>It measures the time elapsed during an event or between 2 events (IN_A input) according to a selectable time base of 1 µs, 100 µs, or 1 ms. The IN_SYNC input can be used to enable or stop a measurement. The module can carry out a maximum of 1 measurement every 5 ms. The shortest measurable pulse is 100 µs, even if the unit defined by the user is 1 µs. The maximum measurable duration is 4,294,967,295 units (unit to be defined).</p>   |
| Ratio counting              | <p>Ratio counting mode only uses the IN_A and IN_B inputs. There are 2 possible modes:</p> <ul style="list-style-type: none"> <li>■ Ratio 1: Used to divide 2 frequencies. This is intended for applications such as flowmeters, mixers, etc.</li> <li>■ Ratio 2: Used to subtract 2 frequencies. This is intended for the same applications, but for those requiring more precise regulation (more similar frequencies).</li> </ul> <p>Ratio 1 mode gives the results in thousandths for better accuracy (a display of 2000 corresponds to a value of 2) and ratio 2 mode gives the results in Hz.</p> <p>The maximum frequency that the module can measure on the IN_A and IN_B inputs is 60 kHz.</p>  |
| Downcounting                | <p>This mode is used to list a group of operations. In this mode, activating the synchronization function starts the counter which, starting from a user-defined preset value, decreases with each pulse applied to the IN_A input, until it reaches 0. This downcounting is made possible when the enable function has been activated. The counting register is thus updated at 1 ms intervals.</p> <p>One basic use of this mode is to signal, using an output, the end of a group of operations (when the counter reaches 0).</p> <p>The shortest pulse applied to the IN_SYNC input is 100 µs. The maximum frequency applied to the IN_SYNC input is 1 pulse every 5 ms. The maximum user-defined preset value is 4,294,967,295. The maximum count value is 4,294,967,295 units.</p> |
| Loop (modulo) counting      | <p>This mode is used in packaging and labelling applications where actions are repeated on sets of moving objects:</p> <ul style="list-style-type: none"> <li>■ In upcounting, the counter increases until it reaches the user-defined "modulo - 1" value. On the next pulse, the counter is reset to 0 and upcounting restarts.</li> <li>■ In downcounting, the counter decreases until it reaches 0. On the next pulse, the counter is reset to the user-defined "modulo - 1" value. Downcounting can then restart.</li> </ul> <p>The maximum frequency applied to the IN_A and IN_B inputs is 60 kHz. The maximum frequency of the modulo event is 1 event every 5 ms. The maximum modulo value is 4,294,967,296 (possible by declaring 0 in the modulo adjust value).</p>            |
| 32-bit counter counting     | <p>This mode is mainly used in axis following.</p> <p>The maximum frequency applied simultaneously to the IN_A and IN_B inputs is 60 kHz. The maximum frequency of the referencing event is 1 event every 5 ms. The counter value is between - 2,147,483,648 and + 2,147,483,647.</p>  |
| Width modulation            | <p>In this operating mode, the module uses an internal clock generator to supply a periodic signal on the module's O0 output. Only the O0 output is affected by this mode, as the O1 output is independent of it.</p> <p>The maximum output frequency is 4 kHz. As O0 is a source output, a load resistor is necessary for the O0 output signal to change to 0 at the correct frequency. The cyclic ratio adjustment range varies according to the frequency of the O0 output.</p>   |

### Operating modes for module BMXEHC0800


|                                    |   |
|------------------------------------|---|
| <b>5 configurable 16-bit modes</b> | <p>Frequency meter</p> <p>This mode measures a frequency, speed, rate, or data stream control. As standard, this mode measures the frequency received on the IN_A input. This frequency is expressed in Hz (number of pulses per second), with a precision of 1 Hz.</p> <p>The maximum frequency on the IN_A input is 10 kHz. The maximum cyclic ratio at 10 kHz is 60%.</p>  |
|                                    | <p>Event counting</p> <p>This mode is used to determine the number of events received. In this mode, the counter calculates the number of pulses applied to the IN_A input at time intervals defined by the user. As an option, it is possible to use the IN_AUX input during a period of time, provided that the enable bit has been configured.</p> <p>The module counts the pulses applied to the IN_A input each time the pulse for this input lasts longer than 50 µs (without anti-bounce filter). Pulses with less than 100 ms synchronization are lost.</p>   |
|                                    | <p>Downcounting</p> <p>This mode is used to list a group of operations. In this mode, when counting is enabled (software validation via the valid_sync command), a rising or falling edge on the IN_AUX input causes a value, defined by the user, to be loaded in the counter. The latter decreases with each pulse applied to the IN_A input until it reaches the value 0. Downcounting is made possible when the force_enable command is high (software positioning).</p> <p>The smallest pulse applied to the IN_AUX input varies according to the selected filter level. The maximum frequency applied to the IN_AUX input is 1 pulse every 25 ms.</p>   |
|                                    | <p>Loop (modulo) counting</p> <p>This mode is used in packaging and labelling applications where actions are repeated on sets of moving objects. The counter increases with each pulse applied to the IN_A input until it reaches the user-defined "modulo - 1" value. On the next pulse in the upcounting direction, the counter is reset to 0 and upcounting restarts.</p> <p>The maximum frequency applied to the IN_A input is 10 kHz. The smallest pulse applied to the IN_AUX input varies according to the selected filter level. The maximum frequency of the modulo event is 1 event every 25 ms. The maximum modulo value is 65,536 units.</p>  |
|                                    | <p>Up/down counter</p> <p>This mode is used for an accumulation, upcounting, or downcounting operation on a single input. Each pulse applied to the IN_A input produces:</p> <ul style="list-style-type: none"> <li>■ Upcounting of pulses if the IN_AUX input is high</li> <li>■ Downcounting of pulses if the IN_AUX input is low</li> </ul> <p>The counter values vary between the limits - 65,536 and + 65,535. The maximum frequency applied to the IN_A input is 10 kHz. Pulses applied to the IN_A input after a change of direction are only upcounted or downcounted after a period corresponding to the delay for taking account of the state of the IN_AUX input due to the programmable filter level on this input.</p> |
| <b>One 32-bit mode</b>             | <p>32-bit counter counting</p> <p>32-bit counter counting mode is available for channels 0, 2, 4, and 6 (channels 1, 3, 5, and 7 are now inactive). It behaves in the same way as the up/down counting mode using up to 3 physical inputs. It enables simultaneous upcounting and downcounting.</p> <p>The counter values vary between the limits - 2,147,483,648 and + 2,147,483,647 (31 bits + sign). The maximum frequency applied to the IN_A and IN_B inputs is 10 kHz. The smallest pulse applied to the IN_AUX input is defined according to the filtering applied to this input. The maximum frequency of loading the preset value is 1 every 25 ms.</p>  |



BMXEHC0200



BMXEHC0800



BMXFTB20•0

### References

#### BMXEHC0200/0800 counter modules (1)

| Description  | No. of channels | Characteristics | Reference  | Weight kg/lb    |
|--|-----------------|-----------------|------------|-----------------|
| Counter modules for 24 V ...   | 2               | 60 kHz counting | BMXEHC0200 | 0.112/<br>0.247 |
| 2 and 3-wire sensors and 10/30 V ... incremental encoders with push-pull outputs | 8               | 10 kHz counting | BMXEHC0800 | 0.113/<br>0.249 |

### Connection accessories (2)

| Description                              | Composition                                    | Unit reference | Weight kg/lb    |
|--|--|----------------|-----------------|
| Pack of connectors for BMXEHC0200 module | Two 16-way connectors and one 10-way connector | BMXXTSHSC20    | 0.021/<br>0.046 |

|  |             |            |                 |
|--|-------------|------------|-----------------|
| 20-way removable terminal blocks for BMXEHC0800 module | Caged       | BMXFTB2000 | 0.093/<br>0.205 |
|  | Screw clamp | BMXFTB2010 | 0.075/<br>0.165 |
|  | Spring      | BMXFTB2020 | 0.060/<br>0.132 |

|  |   |              |   |
|--|---|--------------|---|
| Shielding connection kit for BMXEHC0200/0800 modules | Comprising a metal bar and two support bases for mounting on rack | See page 2/3 | — |
|--|---|--------------|---|

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) The shielding on the cordsets carrying the counter signals must always be connected to the **BMXXSP••00** shielding connection kit mounted under the rack that holds the **BMXEHC0200** module (see page 2/3).



BMXERT1604T module

3

### Presentation

The time stamping system is a complete solution providing a SCADA with a sequence of events that are time-stamped at source, enabling the user to analyze the source of any abnormal behavior in an automated system.

The SOE (sequence of events) is displayed in the alarms log or in the list of events for a client such as a SCADA.

Each event in the SOE is a change of value (transition) of a discrete I/O detected by a time stamping module.

### Advantages

Using the time stamping system has the following advantages:

- No PLC programming
- Direct communication between the time stamping modules and the client; if the time stamping modules are in a Quantum Ethernet I/O drop, the bandwidth of the PLC communication is not used
- Consistency of the I/O values between the process (time stamping modules) and the client
- Consistency is maintained irrespective of the operating mode
- No loss of events under normal operating conditions
- Management of Hot Standby configurations on the PLC and/or SCADA redundancy

### Composition of a time stamping architecture

#### BM•CRA312•0 module

This time stamping module can be at the source of any discrete I/O signal located in the drop with a resolution of 10 ms.

To help ensure no event is lost, all events are stored and kept in a buffer located in the product until OFS takes them.

Synchronization of the CRA module uses the NTP protocol.

#### BMXERT1604T module

This module has 16 discrete inputs which carry out the time stamping at source outputs with a resolution of 1 ms.

To help ensure no event is lost, all events are stored and kept in a buffer located in the product until OFS takes them.

This module can be placed either in an RIO drop, or in a local rack equipped with a BM•CRA31210 module.

The CRA module is synchronized via the DCF 77 or IRIG-B standards.

#### OFS V3.60

OFS V3.60 is used to access events stored in the various buffers in the architecture and to place them in the SCADA via the standard OPC DA protocol. For further information, consult our website [www.schneider-electric.com](http://www.schneider-electric.com).


#### Vijeo Citect V7.40

Vijeo Citect V7.40 receives events transmitted by OFS and displays them in the SOE or in the list of alarms.

| Performance   |  |  |
|---|--|--|
| Performance   | Event source module                      | Value  |
| Between two identical source modules in the same rack       | <b>BMXERT1604T</b><br><b>BM•CRA31210</b> | 1.6 < resolution < 3.3 ms<br>10 ms   |
| Between two different inputs in the same source module      | <b>BMXERT1604T</b><br><b>BM•CRA31210</b> | 1 ms<br>1 scan   |
| Maximum number of events scanned                            | <b>BMXERT1604T</b><br><b>BM•CRA31210</b> | 400 events (1)<br>2048 events (1)  |
| Maximum number of I/O and memory available                  | <b>BMXERT1604T</b><br><b>BM•CRA31210</b> | 16 discrete inputs on module<br>512 events in internal buffer<br>256 discrete I/O configured<br>4000 events in internal buffer |
| Maximum number of source modules in an Ethernet remote drop | <b>BM•CRA31210</b><br><b>BMXERT••••</b>  | 1 per drop<br>9 per drop   |
| Maximum number of event sources controlled                  | <b>BMXERT••••</b>                        | 500 sources per second (1)   |

| References                               |                    |                    |              |
|--|--------------------|--------------------|--------------|
| Description                              | Input type         | Reference          | Weight kg/lb |
| Multifunction time stamping input module | 16 discrete inputs | <b>BMXERT1604T</b> | —            |

(1) This maximum value is not an absolute value. It depends on the overall system dynamics (total number of scanned items and number of events generated by the system).

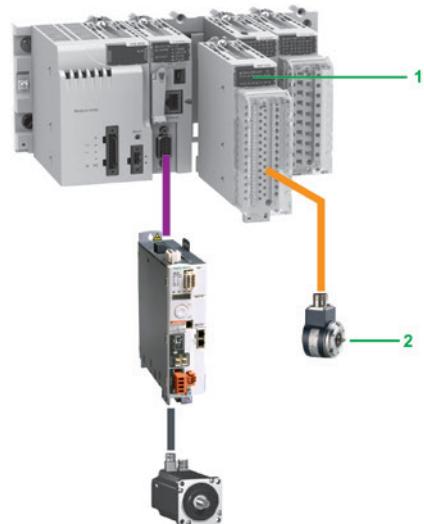

Modicon X80 I/O platform with Modicon M340 processor

3

## Presentation

The **BMXEAEO300** SSI encoder interface module **1** for the Modicon automation platform **(1)** is a 3-channel standard synchronous serial interface module designed for use with SSI absolute encoders **2**.

The **BMXEAEO300** module enables SSI encoder values to be processed on PAC platforms for applications requiring accurate and reliable position/angular control, such as:

- Hydro power, e.g. dam inlet gate position control
- Wind power, e.g. wind turbine blade pitch control
- Complex motion loop control, e.g. ship elevator, blast furnace, flame cutting, etc.

The **BMXEAEO300** module provides a migration path from Premium (with **TSXCTY2C** measurement and counter module) to the Modicon X80 I/O platform SSI solution to compete in the above market segments.

Like any other application-specific module, the **BMXEAEO300** module is installed in the rack slots **(01 to 11)**. The number of modules is limited by the maximum number of application-specific channels, permitted according to the CPU type (consult our website [www.schneider-electric.com](http://www.schneider-electric.com)).

### Dam inlet gate control

Inlet gate control enables the water level in a dam to be monitored and controlled:

- The SSI encoder provides the PLC with accurate feedback of the gate position for precise monitoring of gate opening, adjustment, and positioning.
- The SSI interface converts the signals from the SSI encoders and transmits them to the CPU.

### Wind turbine blade pitch control

Pitch control is required for adjusting the angle of the wind turbine blades in relation to the wind direction and strength, in order to achieve optimum energy conversion efficiency.

- The SSI absolute encoder is frequently used to feedback the position of the blade due to its reliability and robustness.
- Typically, the position of each of the 3 blades are read by the SSI encoders and then transmitted to the CPU via the SSI interface for motion loop control. Sometimes, 3 additional SSI inputs act as backup. Therefore, this new offer is adequately sized for the channel density.

## Description

The **BMXEAEO300** SSI encoder interface module is standard format **(1 slot)**. Its housing provides IP 20 protection of the electronics and it is locked in each slot **(01 to 11)** by a captive screw.


The front panel of the **BMXEAEO300** module features:

- 1 A rigid housing providing support and protection for the electronic card
- 2 The module reference marking (a label is also visible on the right-hand side of the module)
- 3 A display block indicating:
  - Module status, 4 LEDs:
    - RUN (green): module's operational status
    - ERR (red): internal fault detected in the module or a fault detected between the module and the rest of the configuration
    - I/O (red): external fault detected
    - DL (green): firmware download status
  - Status of the 3 SSI channels, 8 LEDs:
    - Sx (green): channel x input (x = 0, 1, or 2)
    - Qx (green): reflex output for channel x (x = 0, 1, or 2)
    - IO/I (green): capture inputs for the 3 SSI channels
- 4 A connector for a 28-way terminal block, for connecting to a removable caged or spring terminal block on sensors and preactuators

### To be ordered separately:

- 5 A 28-way removable caged terminal block **BMXFTB2800** or spring terminal block **BMXFTB2820**, supplied with a channel identification label
- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack: **BMXXSP●●00** (reference dependent on the number of slots in the rack) (see page 2/5)
- A set of clamping rings **STBXSP30●0** for the connection cable shielding braids (reference dependent on the cable diameter) (see page 2/3)

*(1) Only for the Modicon automation platforms compatible with Modicon X80 I/O platform*

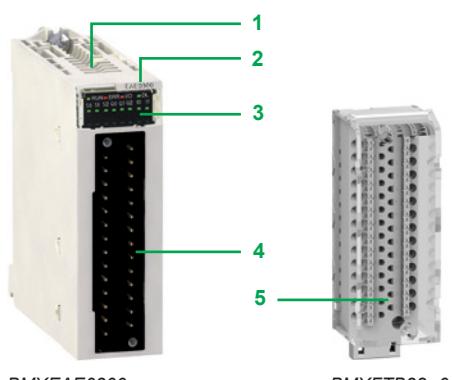

BMXEAEO300

BMXFTB28●0

### Module specifications and functions

#### Specifications

The SSI module **BMXEAEO300** is a 3-channel, synchronous serial interface, absolute encoder interface for Modicon PLCs.

It supports:

- 3 channels of SSI inputs (DATA pair, CLK pair, 24 VDC field power supply to encoder)
- 1 reflex output for each SSI channel (Q)
- 2 capture inputs for the 3 SSI channels (CAP\_IN0, CAP\_IN1)
- 8 to 31 bits data width
- 4 ranks of baud rates (100 kHz, 200 kHz, 500 kHz, 1 MHz)
- capture and compare functions

#### Basic and optional functions

The following table presents the main functionalities of the **BMXEAEO300** module:

| Function                               | Basic/<br>optional  | Description  |
|--|---------------------|--|
| Absolute SSI encoder value acquisition | Basic               | The position values of the SSI channel are automatically read by the module within 1 ms, unless the channel is disabled.   |
| Modulo                                 | Optional for motion | The modulo function limits the dynamics of the position value within the power of 2. An event (if enabled) detects the modulo passing. The reflex output can also be asserted at the passing of modulo (if configured).                                    |
| Reduction                              | Optional for motion | This function reduces the intrinsic resolution of the encoder by a value defined by the "reduction" parameter. This reduction is carried out by a shift in the bit field provided by the encoder.  |
| Offset                                 | Optional for motion | The correction function of the encoder offset systematically corrects the offset produced by the encoder at mechanical position "0". The user enters the absolute encoder offset parameter.  |
| Capture                                | Optional for events | The two capture input registers (per channel) enable the PLC program to carry out a dynamic measurement function between two points. The capture action can be triggered by two capture inputs. The event will be triggered at each occurrence of capture. |
| Compare                                | Optional for events | Two independent comparators (per channel), with thresholds that can be modified by adjustment (explicit exchange), are able to generate an event or reflex output when the threshold is crossed.   |

#### Main features

- Supported by Unity Pro V6.0 (or higher).
- Supports absolute encoder 24 V model with standard SSI interface, including Telemecanique Sensors OsiSense SSI encoders. For further information, consult the website [www.tesensors.com](http://www.tesensors.com).
- Standards and approvals: CE, UL, CSA, C-Tick, GOST, etc.


### References

#### SSI encoder interface module (1)

| Description                         | Number of channels | Description per channel  | Reference         | Weight kg/lb    |
|-------------------------------------|--------------------|--|-------------------|-----------------|
| <b>SSI encoder interface module</b> | 3 SSI channels     | 1 reflex output for each SSI channel<br>2 capture inputs for the 3 SSI channels<br>8 to 31 bits data width<br>4 ranks of baud rates: 100 kHz, 200 kHz, 500 kHz, 1 MHz<br>Capture and compare functions | <b>BMXEAEO300</b> | 0.138/<br>0.304 |



BMXEAEO300




BMXFETB2800

#### Cabling accessories

| Description  | Description, use  | Reference          | Weight kg/lb    |
|--|---|--------------------|-----------------|
| <b>28-way removable terminal block</b>                             | Caged   | <b>BMXFETB2800</b> | 0.111/<br>0.245 |
|  | Spring  | <b>BMXFETB2820</b> | 0.080/<br>0.176 |
| <b>Shielding connection kit</b><br>for module<br>BMXEAEO300<br>(2) | Comprising a metal bar and two support bases for mounting on rack | See page 2/3       | —               |

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) The shielding on the cables carrying the power supply to the module, each SSI channel, the capture inputs and the reflex outputs (if any of them is wired) must always be connected to the **BMXXSP••00** shielding connection kit mounted under the rack holding the **BMXEAEO300** module (see page 2/3).

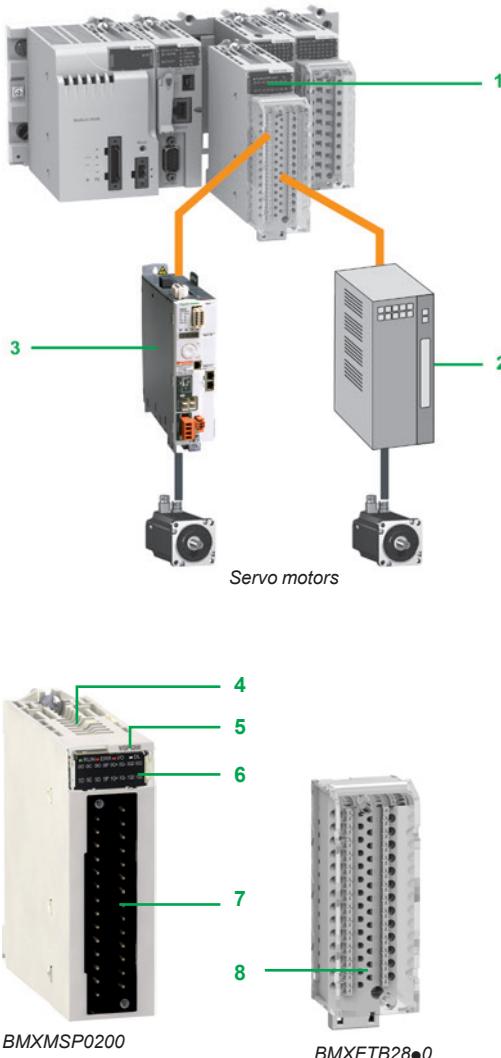

### **Presentation**

The **BMXMSP0200** motion control *pulse train output* (PTO) module for the Modicon X80 I/O platform is used for controlling third-party variable speed drives **2**, which have an integrated position loop and inputs that are compatible with open collector outputs.

The **BMXMSP0200** control module is also directly compatible with the Lexium 32C and 32M **3** servo drive ranges, which have an integrated pulse control interface.

The **BMXMSP0200** motion control PTO module has two independent PTO channels. Like any other application-specific module, it is installed in the rack slots (labelled **01** to **11**). The number of modules is limited by the maximum number of application-specific channels permitted according to the CPU type:

- Standard **BMXP34100**: Maximum of 20 application-specific channels (1)
- Performance **BMXP3420•0**: Maximum of 36 application-specific channels (1)
- **BMEP5810**: Maximum of 24 application-specific channels (1)
- **BMEP5820**: Maximum of 32 application-specific channels (1)
- **BMEP5830** and **BMEP5840**: Maximum of 64 application-specific channels (1)
- **BMEP585040**: Maximum of 180 application-specific channels (1)
- **BMEP586040**: Maximum of 216 application-specific channels (1)

### **Description**

The **BMXMSP0200** motion control module is standard format (1 slot). Its housing provides IP 20 protection of the electronics and it is locked in each slot (**01** to **11**) by a captive screw.


The front panel of the **BMXMSP0200** motion control module features:

- 4** A rigid body providing support and protection for the electronic card
- 5** A module reference marking (a label is also visible on the right-hand side of the module)
- 6** A display block indicating:
  - Module status, 4 LEDs (RUN, ERR, I/O and DL)
  - Status of the auxiliary inputs, 4 per channel
  - Status of the PTO outputs, 2 per channel
  - Status of the auxiliary outputs, 2 per channel
- 7** A connector for a 28-way terminal block, for connecting to a removable spring terminal block on sensors and preactuators

### **To be ordered separately:**


- 8** A 28-way removable caged terminal block **BMXFTB2800** or spring terminal block **BMXFTB2820**, supplied with a channel identification label
- A shielding connection kit to help protect against electrostatic discharge, consisting of a metal bar and two sub-bases for mounting on the rack: **BMXXSP••00** (reference dependent on the number of slots in the rack) (see page 2/3)
- A set of clamping rings **STBXSP30•0** for the connection cable shielding braids (reference dependent on the cable diameter) (see page 2/3)

(1) Application-specific channels: **BMXEHC0200** (2-channel) and **BMXEHC0800** (8-channel) counter modules, **BMXMSP0200** (2-channel) motion control module, **BMXNOM0200** (2-channel) and **BMXNOR0200H** (1-channel) serial communication modules, **BMEAHI0812** (8-channel) analog input module and **BMEAHO0412** (4-channel) analog output module, **BMXEAE0300** (3-channel) SSI module and **BMXERT1604T** (16-channel) discrete module.

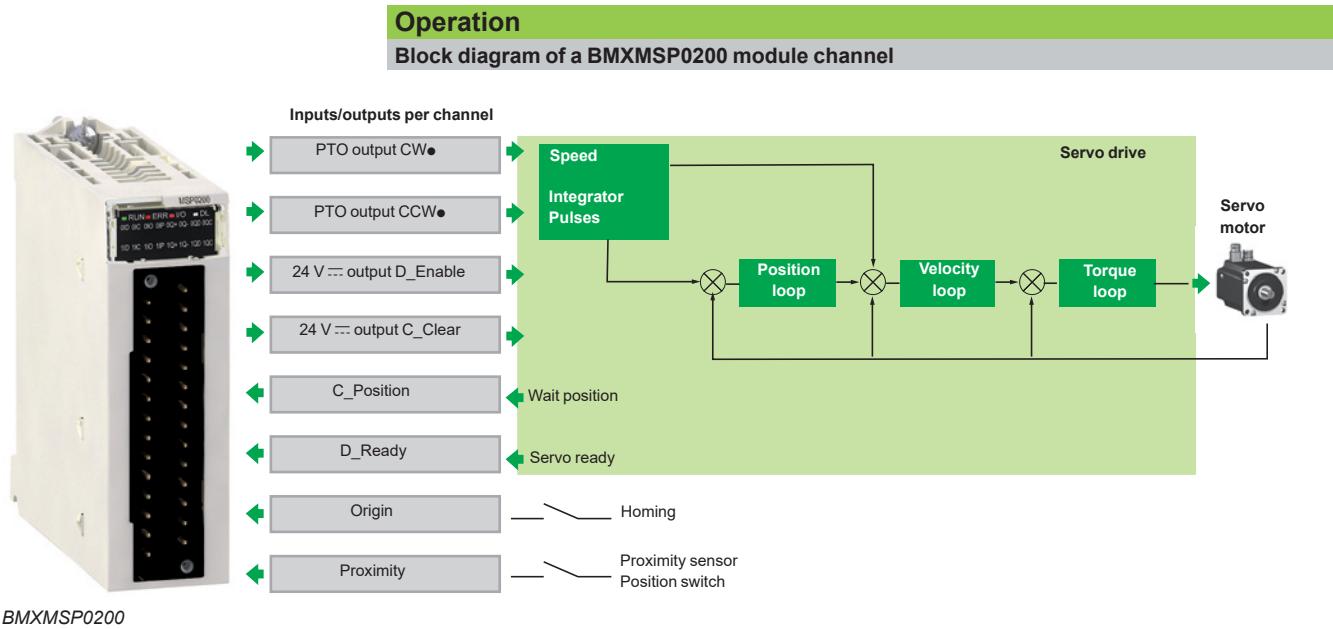

BMXMSPO200

3



BMXMSPO200

BMXFTB2800

## References

### Motion control modules (1)


| Description                              | Number of channels | Description per channel   | Reference  | Weight kg/lb    |
|--|--------------------|---|------------|-----------------|
| PTO module<br>(PTO = Pulse Train Output) | 2                  | 2 x 200 kHz max. PTO outputs<br>2 x 24 V .../50 mA auxiliary outputs<br>4 x 24 V ... auxiliary inputs | BMXMSPO200 | 0.145/<br>0.320 |

### Cabling accessories

| Description   | Description, use   | Length      | Reference   | Weight kg/lb    |
|---|--|-------------|-------------|-----------------|
| 28-way removable terminal block                       | Caged  | –           | BMXFTB2800  | 0.111/<br>0.245 |
| Connection cable for daisy chain or pulse control (2) | Spring   | –           | BMXFTB2820  | 0.080/<br>0.176 |
| Shielding connection kit for module BMXMSPO200        | From BMXMSPO200 (screw terminal block) module to Lexium 32C or 32M (RJ45 connector)<br>(cable with flying leads at one end and an RJ45 connector at the other) | 3 m/9.84 ft | VW3M8223R30 | –               |

(1) Typical consumption: See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) The shielding on the cordsets carrying the motion control signals must always be connected to the BMXXSP●000 shielding connection kit mounted under the rack holding the BMXMSPO200 module (see page 2/3).

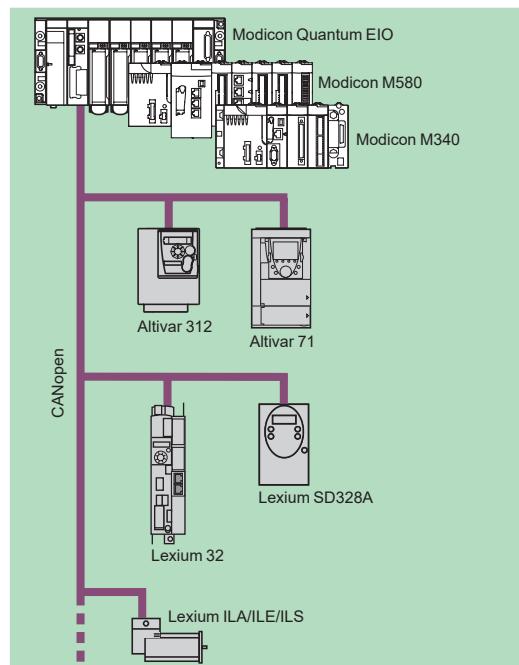

MFB: Motion control distributed over CANopen



## Presentation

MFB (*Motion Function Blocks*) is a library of function blocks integrated in Unity Pro used to set up motion control in the architectures of drives and servo drives on CANopen buses:

- Altivar 312: For asynchronous motors from 0.18 to 15 kW
- Altivar 71: For synchronous or asynchronous motors from 0.37 to 500 kW
- Lexium 32: For servo motors from 0.15 to 7 kW
- Lexium ILA/ILE/ILS: Integrated motor drives from 0.10 to 0.35 kW
- Lexium SD328A: For 3-phase stepper motors from 0.35 to 0.75 kW.

In compliance with PLCopen specifications, the MFB library allows both easy and flexible motion programming with Unity Pro, as well as axis diagnosis.

In maintenance operations, drives can be replaced quickly thanks to drive parameter download blocks.

Setting up drives on the CANopen network is facilitated through *Motion Tree Manager* organization in the Unity Pro browser, making it easy for users to access the application drives.

## Applications

The features of the *Motion Function Blocks* library are particularly suitable for machines with independent axes. In the case of these modular/special machines, MFB function blocks are an ideal solution for controlling single axes. The following are typical applications for this type of architecture:


- Automatic storage/removal
- Material handling
- Palletizers/depalletizers
- Conveyors
- Packaging, simple label application
- Grouping/ungrouping
- Adjustment axes in flexible machines, etc.

## Functions

The table below lists the function blocks of the MFB library and the drives compatible with them. The prefix indicates the block family:

- MC: Function block defined by the Motion Function Blocks PLC Open standard
- TE: Function block specific to Schneider Electric products
- Lxm: Function block specific to Lexium servo drives

| Type                              | Function  | Function block        | Altivar 312 | Altivar 71 | Lexium 32 | Lexium ILA/ILE/ILS | Lexium SD328A |
|-----------------------------------|---|-----------------------|-------------|------------|-----------|--------------------|---------------|
| Management and motion             | Read an internal parameter  | MC_ReadParameter      |             |            |           |                    |               |
|                                   | Write an internal parameter   | MC_WriteParameter     |             |            |           |                    |               |
|                                   | Read the current position   | MC_ReadActualPosition |             |            |           |                    |               |
|                                   | Read the instantaneous speed  | MC_ReadActualVelocity |             |            |           |                    |               |
|                                   | Acknowledge detected error messages   | MC_Reset              |             |            |           |                    |               |
|                                   | Stop any active movement  | MC_Stop               |             |            |           |                    |               |
|                                   | Axis coming to standstill   | MC_Power              |             |            |           |                    |               |
|                                   | Movement to absolute position   | MC_MoveAbsolute       |             |            |           |                    |               |
|                                   | Relative movement   | MC_MoveRelative       |             |            |           |                    |               |
|                                   | Additional movement   | MC_MoveAdditive       |             |            |           |                    |               |
|                                   | Homing  | MC_Home               |             |            |           |                    |               |
|                                   | Movement at given speed   | MC_MoveVelocity       |             |            |           |                    |               |
|                                   | Read diagnostic data  | MC_ReadAxisError      |             |            |           |                    |               |
|                                   | Read servo drive status   | MC_ReadStatus         |             |            |           |                    |               |
| Save and restore parameters (FDR) | Torque control  | MC_TorqueControl      |             |            |           |                    |               |
|                                   | Read actual torque value  | MC_ReadActualTorque   |             |            |           |                    |               |
|                                   | Manual control  | MC_Jog                |             |            |           |                    |               |
|                                   |   |                       |             |            |           |                    |               |
| Advanced Lexium functions         | Read a motion task  | Lxm_UploadMTTask      |             |            |           |                    |               |
|                                   | Write a motion task   | Lxm_DownloadMTTask    |             |            |           |                    |               |
| System                            | Start a motion task   | Lxm_StartMTTask       |             |            | (1)       |                    |               |
|                                   | Set the reduction ratio, signed   | Lxm_GearPosS          |             |            | (1)       |                    |               |
| Compatible                        | (1) The Lxm_StartMTTask and Lxm_GearPosS function blocks are only compatible with the type Lexium 32 (LXM32M) servo drives. |                       |             |            |           |                    |               |

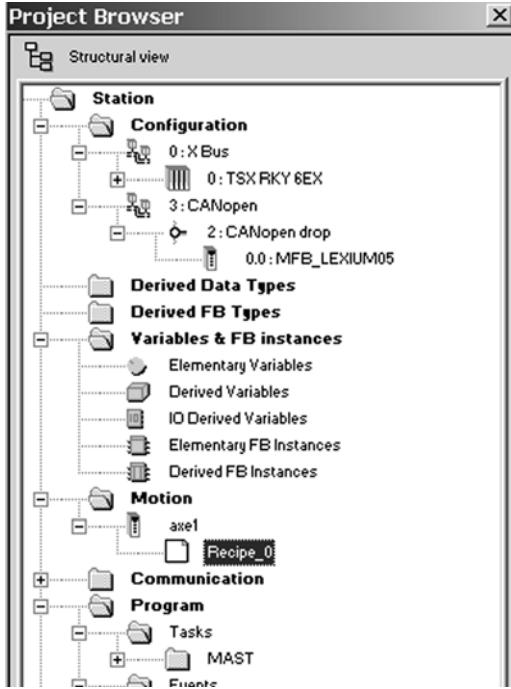

Motion Tree Manager integrated in the Unity Pro browser

### Motion Tree Manager

*Motion Tree Manager* is associated with Unity Pro's MFB library and integrated in its browser. It provides specific assistance for:

- Axis object management
- Axis variable definition
- Drive parameter management

*Motion Tree Manager* automatically creates links between the CANopen bus configuration and the MFB function block data using a limited amount of configuration data.

### General axis parameters

In this tab, the designer is prompted to define:

- The name of the axis that will identify it in the browser for the entire application
- The address of the drive on the CANopen bus


### Axis parameters

The drop-down lists in this tab are used to determine the exact type of drive: family, version.

### Variable names

This last tab is used to identify data structures:

- **Axis\_Reference:** Used by the function block instances for the axis in question
- **CAN\_Handler:** Used to manage communication with the drive via the CANopen network

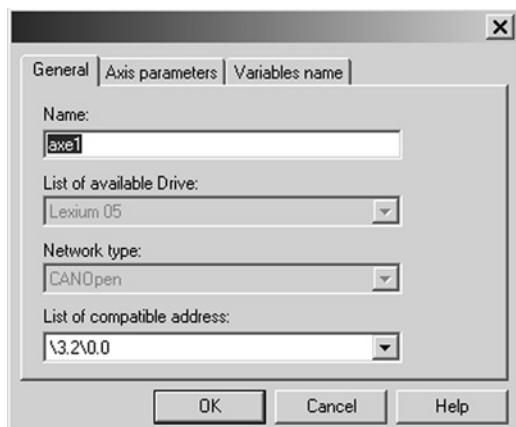

General parameters: Axis name and address

### Recipe definition

The “recipes” attached to the axis are the data structures containing the adjustment parameters of a given drive. This data is used when:


- Changing the drive with restoration of the context during “Faulty Device Replacement” (FDR) maintenance
- Changing the manufacturing program of the machine and calling up an appropriate set of parameters: servo control gains, limitations, etc. adapted to the weight and size of the moving parts
- Saving parameters in the initial values of the PLC application

### Programming, diagnostics, and maintenance

Communication between the PLC and drive is automatically set up by the system as soon as a TE\_CAN\_Handler instance is declared in the Unity Pro task with which the axis is associated. Movements are then programmed by sequencing function blocks from the library in the user's chosen Unity Pro editor (LD, ST, FBD).

The two function blocks, MC\_ReadStatus, and in some cases MC\_ReadAxisError, are useful for determining the overall status of the axis, as well as the code of the active detected errors.

The function blocks TE\_UploadDriveParam and TE\_DownloadDriveParam allow the application to save the drive parameters (recipe) and to then quickly reload them into another drive when it is necessary to change the original one.

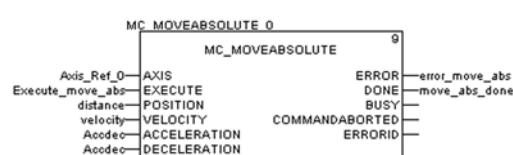


MFB: Programming a movement in absolute mode

### **Presentation**

The **BMXETM0200H** frequency input module offers turbine shaft and engine speed monitoring functionality for general purpose turbomachinery control (TMC) applications. It can be integrated into Modicon M340 and M580 standard and high-availability systems.

TMC application include prime movers, driven equipment, auxiliaries, mechanical retrofits, and protection. With the Modicon Package solution, the frequency input and measurement function is available for the following general purpose TMC application types:

- Large hydro turbines
- Small steam turbine generators
- Small hydro turbines
- Small mechanical drive gas turbines
- Diesel generators
- Reciprocating compressors
- Packaged air compressors
- Single-stage mechanical drive turbines: pumps

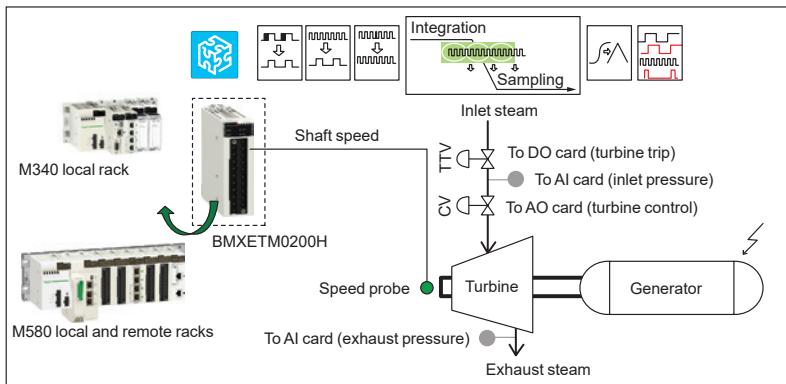

*TMC governor control system architecture*

### **Functionality**

The purpose of the **BMXETM0200H** module is to monitor the turbine shaft or engine speed. It is designed to receive electrical pulses generated by the gear tooth sensing probe, cam, and crank etc. and convert these pulses into a numerical value. The measured value of the turbine shaft rotating velocity is highly accurate with a fast refresh rate.

With the **BMXETM0200H** module providing frequency input and measurement, Modicon PACs build up a closed loop control system as part of the turbomachinery governor. This control mechanism will automatically track and direct the speed of driven equipment (such as a generator or compressor) and a prime mover (such as a turbine or engine) under varying load conditions with the aim of:

- maintaining the selected speed
- limiting slow and fast speeds.
- helping to protect mechanical parts and customer investment by anticipating overspeeds by means of its acceleration and jerk detection capability



*BMXETM0200H*

### Module specifications

#### Availability and compatibility

Available for Modicon M340 and M580 standalone and HSBY platforms, on local rack or RIO rack with hot swapping supported.

#### Ambient operating temperature

Hardened with extended temperature range from -25...70 °C/-13...158 °F and conformal coating.

#### Measurement performance

2 frequency input channels for 1V & 1Hz signal up to a maximum of 500 KHz with 100 KHz, 10 KHz, and 1 KHz input filters.

#### Supported signal source device type

Speed sensor inputs support passive pickup, active speed sensor (output OC, TTL, ST), potential transformer, and incremental encoder.

#### Digital reflex outputs

1 positive 24 VDC reflex digital output per channel controlled from an embedded comparator.

#### Error detection

Detects broken wire and probe health status.

#### Dedicated TMC functions

A set of dedicated TMC functions for turbine shaft monitoring, including:

- Frequency pattern recognition up to 512 pulses per pattern
- Acceleration and jerk detection
- Phase angle and ratio detection between channels
- Scaling factor for RPM measurement up to 1,024 teeth per revolution
- Alarm bits that can be time stamped by the Modicon M580 controller

#### Software configuration

Configurable using Unity Pro V11 (S, L, and XL) with TMC Hotfix integrated.

### Reference

#### Frequency input module


| Description  | Composition   | Reference   | Weight<br>kg/lb |
|--|---|-------------|-----------------|
| Ruggedized<br>turbomachinery<br>frequency input<br>module (2 channels) | 1 ms cycle time<br>2 digital reflex outputs<br>2 discrete inputs (for frequency<br>measurement functions) | BMXETM0200H | 0.124/<br>0.273 |

Technology approved



PMESWT0100 Scaine partner  
weighing module

3

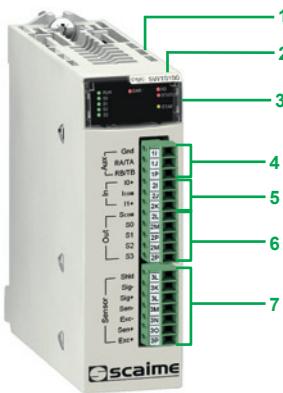

PMESWT0100

### Presentation

The **PMESWT0100** Scaine partner weighing module is integrated in a Modicon X80 I/O platform with an Ethernet + X-bus **BMEXBP●●00(H)** rack and a Modicon M580 **BMEP58●●00** PLC or in a Modicon X80 RIO drop with an Ethernet + X-bus **BMEXBP●●00(H)** rack and a **BMECRA31210** adapter.

With this module it is possible to go beyond the scope a of simple weighing application.

It is suitable for static weighing applications such as silo level measurement and scale weighing and it also suits well for low speed dynamic weighing applications such as filling, dosing, and material transfer.

The Modicon X80 I/O platform can manage the whole weighing environment as well as the whole machine or industrial process associated with the weighing system. Indeed, weighing data is accessible by the PLC via implicit exchanges or explicit commands. Once the weighing signal is received, it is processed and transferred by the weighing module to the Modicon M580 PLC via the Ethernet backbone. This Ethernet weighing transmitter offline configuration, online calibration, monitoring, and weighing diagnostics are done by Unity Pro software via FDT/DTM. The Scaine partner weighing module has been developed to comply with the general standards and certifications of the Modicon X80 I/O platform. For more information, see page 8/2 or consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

### Description

The **PMESWT0100** weighing module features the following:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking (a label is also visible on the right-hand side of the module)
- 3 A module and channel status display block
- 4 Screw terminals for connecting an external HMI output
- 5 Screw terminals for connecting discrete reflex inputs
- 6 Screw terminals for connecting discrete reflex outputs
- 7 Screw terminals for connecting input load cells

### Main characteristics

#### Measurement input

1 weighing channel per module, comprising up to 8 load cells connected via junction box

#### Input load cell supply voltage

5 V

#### Internal resolution

24 bit converter

#### User resolution

up to 1,000,000, factory-calibrated 500,000 at 2 mV/V

#### Internal measurement rate

6 to 400 measurements per second

#### External measurement rate

100 measurements per second

#### Discrete reflex outputs

#### Number of applications

4 positive logic outputs, 2 for dosing and 2 for threshold monitoring

#### Maximum voltage

55 V

#### Nominal current

400 mA

#### Response time

2 ms discrimination

#### Discrete inputs

#### Number of applications

2 positive logic inputs, weighing functions

#### Low voltage range

0...3 V

#### High voltage range

9...28 V

#### High current

20 mA at 24 V



PMESWT0100

| References   |   |                       |                 |
|--|---|-----------------------|-----------------|
| Weighing module  |   |                       |                 |
| Description  | Composition   | Reference             | Weight kg/lb    |
| <b>Scaime partner weighing module</b><br>(1 weighing channel per module) | <ul style="list-style-type: none"> <li>- Load cell input 100 measurements/s (for 1 to 8 load cells)</li> <li>- 4 discrete reflex outputs (for threshold monitoring and dosing)</li> <li>- 2 discrete inputs (for weighing functions)</li> <li>- 1 output for an external HMI</li> </ul> | <b>PMESWT0100 (1)</b> | 0.233/<br>0.514 |
| Technology approved by   |   |                       |                 |
| <b>Schneider Electric</b>  |   |                       |                 |

*(1) To order this product, please consult our Customer Care Centre.*



---

**Selection guide** ..... page 4/2

## Safety power supply

- Presentation, description ..... page 4/4
- Functions, references ..... page 4/5

## Safety discrete I/O modules

- Presentation ..... page 4/6
- Description, connections ..... page 4/7
- References ..... page 4/8

## Safety analog I/O module

- Presentation, description, connections ..... page 4/9
- References ..... page 4/9

# Modicon X80 I/O platform

## Safety I/O modules

| Applications  |  | 16-channel safety digital input module  |
|---|--|---|
|  |  |   |
| Type  | DC   |   |
| Voltage   | 24 V   |   |
| Current per channel   | 3.5 mA   |   |
| Range   | Voltage<br>Current   | –<br>–  |
| Modularity  | Number of channels<br>Number of groups<br>Number of channels per common                      | 16<br>2: 0...3 (rank A & B) and 4...7 (rank A & B)<br>8                       |
| Acquisition period  | Hot-swap RAID HDD and battery backup   | –   |
| Resolution  | –  | –   |
| Connection  | Via 20-way caged, screw clamp, or spring-type removal terminal block BMXFTB2000/2010/2020    |   |
| Isolated inputs   | IEC/EN 61131-2 conformity<br>Logic<br>Type of input<br>Sensor compatibility IEC/EN 60947-5-2 | Type 3<br>Positive<br>–<br>2-wire/3-wire                                      |
| Isolated outputs  | Fallback<br>IEC/EN 61131-2 conformity<br>Protection<br>Logic                                 | Configurable fallback setting for each channel<br>–<br>Yes<br>Yes<br>Positive |
| Isolation   | Between channels<br>Between channels and bus<br>Between channels and ground                  | Non-isolated<br>1500 Vrms<br>1500 Vrms  |
| Sensor power supply (ripple included)   | 19...30 V  |   |
| Preactuator power supply (ripple included)  | –  |   |
| Protection of inputs  | Use a fast blow fuse, max 0.5 A, depending on the module current load                        |   |
| Output fuse protection  | –  |   |
| Maximum dissipated power  | 3.57 W   |   |
| Conformal coated  | Yes  |   |
| Operating temperature   | -25...60 °C/-13...140 °F   |   |
| References  | <b>BMXSDI1602</b>  |   |

| 8-channel safety digital output module  | 4-channel safety relay output module  | 4-channel safety analog input module  |
|---|---|---|
|        |  |  |
| DC  | AC/DC relays  | Current   |
| 24 V  | 24 V –/24...230 V ~   | –   |
| 0.5 A   | 5 A   | –   |
| –   | –   | 6   |
| –   | –   | 4...20 mA   |
| 8   | 4 isolated outputs  | 4 isolated inputs   |
| 1   | –   | –   |
| –   | –   | 5 ms for the 4 inputs   |
| –   | –   | 16 bits (12,500 counts)   |
| Via 20-way caged, screw clamp, or spring-type removal terminal block BMXFTB2000/2010/2020 |   |   |
| –   | –   | –   |
| –   | –   | Resistive   |
| Configurable fallback setting for each channel  | –   | –   |
| Yes   | –   | –   |
| Yes   | –   | –   |
| Positive  | –   | –   |
| Non-isolated  | 3000 Vrms   | 500 Vrms  |
| 1500 Vrms   | 3000 Vrms   | 1500 Vrms   |
| 1500 Vrms   | 3000 Vrms   | 1500 Vrms   |
| –   | –   | –   |
| 19...30 V   | 10...264 V ~/10...34 V –  | –   |
| –   | –   | –   |
| Use a fast blow fuse, max 0.5 A, depending on the module current load                     | Use a fast blow fuse, max 6 A, depending on the relay contact current load          | –   |
| –   | –   | –   |
| 4.40 W  | 3.90 W  | 3.98 W  |
| Yes   | Yes   | Yes   |
| -25...60 °C/-13...140 °F  | –   | –   |
| <b>BMXSDO0802</b>   | <b>BMXSRA0405</b>   | <b>BMXSAI0410</b>   |



MS80\_B2098\_CPS11005C

### Presentation

The safety power supply in the Modicon X80 I/O offer is the **BMXCPSS002S**.

The **BMXCPSS002S** power supply module:

- Converts 24...48 V  $\perp\!\!\!\perp$  power into two output voltages, 24 V  $\perp\!\!\!\perp$  and 3.3 V  $\perp\!\!\!\perp$ , which are distributed over the backplane
- Detects over voltage, overload, and short-circuit conditions on both the 3.3 V  $\perp\!\!\!\perp$  and 24 V  $\perp\!\!\!\perp$  backplane lines

The **BMXCPSS3522S** power supply module:

- Converts 100...150 V  $\sim$  power into two output voltages, 24 V  $\perp\!\!\!\perp$  and 3.3 V  $\perp\!\!\!\perp$ , which are distributed over the backplane
- Detects over voltage, overload, and short-circuit conditions on both the 3.3 V  $\perp\!\!\!\perp$  and 24 V  $\perp\!\!\!\perp$  backplane lines

The **BMXCPSS4002S** power supply module:

- Converts 110...240 V  $\sim$  power into two output voltages, 24 V  $\perp\!\!\!\perp$  and 3.3 V  $\perp\!\!\!\perp$ , which are distributed over the backplane
- Detects over voltage, overload, and short-circuit conditions on both the 3.3 V  $\perp\!\!\!\perp$  and 24 V  $\perp\!\!\!\perp$  backplane lines, and allows up to a maximum voltage of 30 V  $\perp\!\!\!\perp$

### Description

The **BMXCPSS002S** power supply module includes:

- 1 Display panel comprising LEDs whose combinations provide a quick diagnostic status of the supply power module:
  - ACTIVE LED (green), on when the power supply is the master power supply, off when it acts as a slave supply in redundant application
  - OK LED (green), on if rack voltages are present and correct
  - RD LED (green), on when all the internal power supply modules function normally
- 2 Printed serial number and product version
- 3 Pencil-point Reset pushbutton for a cold restart of the application.
- 4 2-way connector that can take a removable terminal block (caged or spring-type) for connecting the alarm relay.
- 5 A 5-way connector that can take a removable terminal block (caged or spring-type) for connecting the following:
  - AC or DC line supply
  - Protective earth ground
- 6 1 hook and 1 screw for mechanical attachment and grounding connection to backplane.

**Included with each power supply module:** Set of two caged removable terminal blocks (5-way and 2-way) BMXXTSCPS10

**To be ordered separately (if necessary):** Set of two spring-type removable terminal blocks (5-way and 2-way) BMXXTSCPS20

### Compatibility of the power supply with the rack

The **BMXCPSS002S** is a safety certified power supply that can be used as:

- a main local rack
- an extended local rack
- a main remote rack
- an extended remote rack

The **BMXCPSS002S** is a redundant power supply module. It can be installed alone in single power supply rack or dual power supply rack as a pair (master and slave)

For high available applications, two independent redundant power supplies can be used to increase the security of power supply. In case the master power supply fails to provide the whole current, the slave power supply changes to master mode and continue to function.

The power supply module has to be inserted in the leftmost power supply slots of each rack (marked CPS).

### Advanced diagnostics

The **BMXCPSS002S** can provide advanced diagnostics such as current load, temperatures, remaining life time, under voltage thresholds. These are also representing unique values that will simplify the maintenance by predicting when to replace the power supply before it fails.

*Note: LED diagnostic display is provided for the module and for each input channel.*

## Functions

### Alarm relay

The alarm relay incorporated in each power supply module has a volt-free contact accessible on the front panel, on the 2-way connector.

The operating principle is as follows:

- The alarm relay is energized and its contact is closed (state 1) in normal operation, with the PLC in RUN.
- The relay de-energizes and its associated contact opens (state 0) whenever the application stops, even partially, due to any of the following:
  - Occurrence of a blocking fault (RAM detected error in memory check, Safety watchdog overrun detected on CPU, etc.)
  - Incorrect rack output voltages
  - Loss of supply voltage

### Reset pushbutton

The power supply module in each rack has a Reset button on the front panel.

Pressing the Reset button on the power supply causes re-initialization of all modules in same rack as the power supply. If the **BMXCPSS2S** power supply module is in the main local rack, pressing the Reset button causes re-initialization of the CPU.

In a redundant design, with two **BMXCPSS2S** power supply modules, you can press the Reset button on either, or both, power supply modules to execute the reset function.

Pressing this pushbutton triggers a sequence of service signals, which is the same as that for:

- A power break, when the pushbutton is pressed.
- A power-up, when the pushbutton is released

In terms of the application, these operations represent a cold start (forcing the I/O modules to state 0 and initializing the processor).

## References

### Safety power supply module (1)

| Line supply     | Available power (2) |                   |       | Nominal current | Reference  | Weight kg/lb    |
|-----------------|---------------------|-------------------|-------|-----------------|------------|-----------------|
|                 | 3.3 V ... (3)       | 24 V ... rack (3) | Total |                 |            |                 |
| 24...48 V ...   | 18 W                | 40 W              | 40 W  | 1.67 A          | BMXCP4022S | 0.810/<br>1.786 |
| 100...150 V ~   | 180 W               | 40 W              | 40 W  | 1.67 A          | BMXCP3522S | 0.610/<br>1.345 |
| 100...240 V ... | 18 W                | 40 W              | 40 W  | 1.67 A          | BMXCP4002S | 0.510/<br>1.124 |

### Safety power supply module (1)

| Description                     | Type        | Composition   | Reference   | Weight kg/lb    |
|---------------------------------|-------------|---|-------------|-----------------|
| Set of two removable connectors | Spring-type | One 5-way terminal block and one 2-way terminal block | BMXXTSCPS20 | 0.015/<br>0.033 |
|                                 | Caged       | One 5-way terminal block and one 2-way terminal block | BMXXTSCPS10 | 0.020/<br>0.044 |

(1) Include a set of 2 caged removable connectors. Spring-type connectors available separately under reference BMXXTSCPS20.

(2) The sum of the power consumed on each voltage (3.3 V ... and 24 V ...) must not exceed the total power of the module. See the power consumption table available on our website [www.schneider-electric.com](http://www.schneider-electric.com).

(3) 3.3 V ... and 24 V ... rack voltages for powering modules in the Modicon X80 I/O rack.

# Modicon X80 I/O platform

## Safety I/O modules

## Safety discrete I/O modules

MS80\_62098\_SPSCT17005



Modicon M580 Safety configuration with a mix of standard X80 & Safety I/O

MS80\_62098\_SPSCT17006



Modicon Safety configuration with full safety X80 modules with removable terminal blocks

4

### Presentation of safety I/O modules

Rely on a X80 powerful, proven solution to integrate an homogeneous automation architecture with a process and safety unique platform.

In the Modicon X80 offer, a safety project can include both safety modules and non-safety modules:

- Safety modules in the SAFE task.
- Non-safety modules only for the non-safe tasks (MAST, FAST, AUX0, and AUX1). Only non-safety modules that do not interfere with the safety function can be added to a safety project

Safety I/O modules can be used to connect the safety PAC to the sensors and actuators that are part of the safety loop.

Each safety I/O module incorporates a dedicated safety processor.

Safety I/O modules can be installed in the local backplane or in RIO drops.

All safety I/O modules supports SIL3 standards according to IEC61508. Evaluation is indicated by category (Cat) and performance level (PL).

Each safety I/O module provides module and channel LED diagnostics on the front face of the module:

- The top four LEDs (Run, Err, I/O, and Lck) together describe the state of the module.
- The bottom rows of LEDs combine with the top four LEDs to describe the state and health of each input or output channel.

### Presentation of safety discrete I/O modules

In the Modicon X80 I/O offer, there are three safety discrete I/O modules:

- **BMXSDI1602** digital input module
- **BMXSDO0802** digital output module
- **BMXSRA0405** digital relay output module.

These modules can only be used with a safety CPU.

#### **BMXSDI1602**

The **BMXSDI1602** safety digital input module presents these features:

- 16 Type 3 (1) inputs, in two electrically non-isolated groups of 8 inputs.
- 24 V  $\square$  rated input voltage.
- Achieves SIL3, Cat2/PLd evaluation using 1 input channel and Cat4/PLe using 2 input channels.
- Compatible with 2 or 3 wire proximity sensors.
- Provides optionally two 24 V  $\square$  outputs (VS1 and VS2) for short-circuit to 24 V  $\square$  supervision.
- Monitor external 24 V  $\square$  sensor supply voltage.

#### **BMXSDO0802**

The **BMXSDO0802** safety digital output module presents these features:


- 8 non-electrically isolated 0.5 A outputs.
- 24 V  $\square$  rated output voltage.
- Achieves SIL3, Cat4/PLe evaluation.
- Monitors the external pre-actuator power supply.

#### **BMXSRA0405**


The **BMXSRA0405** safety digital relay output module presents these features:

- 4 relay outputs with 5 A current.
- Rated output voltage of 24 V  $\square$  and 24...230 V  $\sim$  (over voltage category II).
- Achieves SIL2, Cat2/PLc evaluation using 1 relay and SIL3, Cat4/PLe using 2 relays.
- Support for 8 pre-defined application wiring configuration selections.
- Configurable automatic self-test monitoring of the relay capacity to execute the commanded output state (depending on the selected application wiring configuration).
- Configurable module settings for fallback mode and fallback timeout (in ms).

(1) According to IEC61131-2 standard

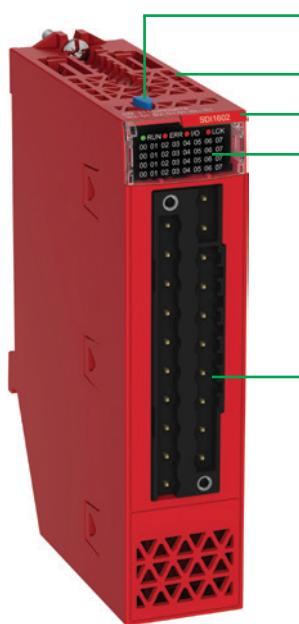

Safety discrete I/O module

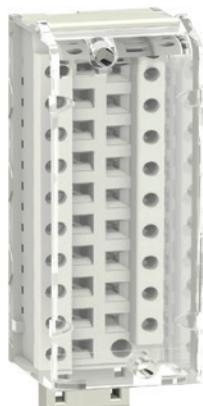

BMXFTB2000

### Description

Safety discrete I/O modules are standard format with one slot. They have an IP 20 case to protect the electronics, and are locked into position with a captive screw.

To be ordered separately: A BMXFTB20●0 20-way removable terminal block (identification label supplied with each I/O module) or a preassembled cordset with a 20-way removable terminal block at one end and flying leads at the other (see connections page 4/8).

The **BMXSDI1602**, **BMXSDO0802** and **BMXSRA0405** safety discrete modules include:

- 1 Lock/unlock configuration button.
- 2 Rigid body providing support and protection for the electronic card
- 3 Module reference marking (a label is also visible on the right-hand side of the module)
- 4 Display panel comprising LEDs whose varying combinations provide a quick diagnostic status of the module and each channel:
  - RUN LED (green): module in operation
  - ERR LED (red): module detected error
  - I/O LED (red): detected I/O module error
  - LCK LED (bi-color green/red): indicates the configuration status
  - 1 LED per channel (bi-color green/red): indicates the channel status
- 5 Connector taking the 20-way removable terminal block for connecting sensors or preactuators

4

### Connections

20-way removable terminal blocks are used to connect the 3 safety discrete I/O modules.

There are three types of 20-way removable terminal blocks:

- caged terminal block **BMXFTB2000** (1)
- screw clamp terminal block **BMXFTB2010** (1)
- spring-type terminal block **BMXFTB2020** (1)

| Type of terminal block | Minimum capacity                               | Maximum capacity                       |
|------------------------|--|--|
| Caged (1)              | One 0.34 mm <sup>2</sup> wire (AWG 22)         | One 1 mm <sup>2</sup> wire (AWG 18)    |
| Screw clamp (1)        | One or two 0.34 mm <sup>2</sup> wires (AWG 22) | Two 1.5 mm <sup>2</sup> wires (AWG 15) |
| Spring-type            | One 0.34 mm <sup>2</sup> wire (AWG 22)         | One 1 mm <sup>2</sup> wire (AWG 18)    |

(1) Connectors are equipped with captive screws: max. tightening torque 0.5 N.m/0.37 lb-ft.

**Note:** No cordset is provided for cabling safety X80 I/O modules. Too many options are possible according to the kind of:

- applications: full safety, safety mixed with availability, etc.
- safety level: SIL3/Cat2, SIL3/Cat4, SIL2, etc.

For more information on the different cabling options, please refer to detailed user manuals published on our website: [www.schneider-electric.com](http://www.schneider-electric.com).



BMXSDI1602



BMXSDO0802



BMXSRA0405



BMXSDI1602



BMXSDO0802



BMXSRA0405

| References                   |                       |  |                           |                                 |                   |              |
|------------------------------|-----------------------|--|---------------------------|---------------------------------|-------------------|--------------|
| Safety discrete input module |                       |  |                           |                                 |                   |              |
| Type of current              | Input voltage         | Connnection via  | IEC/EN 61131-2 conformity | Nº of channels (common)         | Reference         | Weight kg/lb |
| DC                           | 24 V (logic positive) | Cage, screw or spring-type 20-way removable terminal block | Type 3                    | 16 non-isolated inputs (1 x 16) | <b>BMXSDI1602</b> | 0.115/ 0.254 |

| Safety discrete output modules |                       |  |                           |                                |                   |              |
|--------------------------------|-----------------------|--|---------------------------|--------------------------------|-------------------|--------------|
|                                |                       |  |                           |                                |                   |              |
| Type of current                | Input voltage         | Connnection via  | IEC/EN 61131-2 conformity | Nº of channels (common)        | Reference         | Weight kg/lb |
| DC                             | 24 V (logic positive) | Cage, screw or spring-type 20-way removable terminal block | Yes                       | 8 non-isolated outputs (1 x 8) | <b>BMXSDO0802</b> | 0.120/ 0.264 |
| AC/DC Relay                    | 24 V--/ 24...230 V ~  | Cage, screw or spring-type 20-way removable terminal block | Yes                       | 4 isolated outputs (1 x 4)     | <b>BMXSRA0405</b> | 0.145/ 0.320 |

| Removable terminal blocks        |                      |                  |                   |              |
|----------------------------------|----------------------|------------------|-------------------|--------------|
| Description                      | For use with modules | Type composition | Reference         | Weight kg/lb |
| 20-way removable terminal blocks | BMXSDI1602           | Caged            | <b>BMXFTB2000</b> | 0.093/ 0.205 |
|                                  | BMXSDO0802           | Screw clamp      | <b>BMXFTB2010</b> | 0.075/ 0.165 |
|                                  | BMXSRA0405           | Spring           | <b>BMXFTB2020</b> | 0.062/ 0.132 |



BMXSAI0410

### Presentation

The safety analog input module in the Modicon X80 I/O offer is the **BMXSAI0410**:  
The **BMXSAI0410** safety analog input module presents these features:

- 4 isolated analog 4...20 mA current input channels.
- 16 bit resolution (12,500 counts), spanning the data range of 0...25 mA
- Current out of range detection, for current values less than 3.75 mA or greater than 20.75 mA
- Achieves SIL3, Cat2/PLd evaluation using 1 input channel and SIL3, Cat4/PLe using 2 input channels

This module can only be used with a safety CPU.

### Description

The **BMXSAI0410** safety analog input module includes:

- 1 Lock/unlock configuration button.
- 2 Rigid body providing support and protection for the electronic card
- 3 Module reference marking (a label is also visible on the right-hand side of the module)
- 4 Display pannel comprising LEDs whose varying combinations provide a quick diagnostic status of the module and each channel (1):
  - RUN LED (green): module in operation
  - ERR LED (red): module detected error
  - I/O LED (red): detected I/O module error
  - LCK LED (bi-color green/red): indicates the configuration status
  - 1 LED per channel (bi-color green/red): indicates the channel status
- 5 Connector taking the 20-way removable terminal block for connecting sensors or preactuators

### Connections

20-way removable terminal blocks are used to connect the 3 safety discrete I/O modules. (2)

There are three types of 20-way removable terminal blocks:

- caged terminal block **BMXFTB2000** (3)
- screw clamp terminal block **BMXFTB2010** (3)
- spring-type terminal block **BMXFTB2020**

| Type of terminal block | Minimum capacity                               | Maximum capacity                       |
|------------------------|--|--|
| Caged (3)              | One 0.34 mm <sup>2</sup> wire (AWG 22)         | One 1 mm <sup>2</sup> wire (AWG 18)    |
| Screw clamp (3)        | One or two 0.34 mm <sup>2</sup> wires (AWG 22) | Two 1.5 mm <sup>2</sup> wires (AWG 15) |
| Spring-type            | One 0.34 mm <sup>2</sup> wire (AWG 22)         | One 1 mm <sup>2</sup> wire (AWG 18)    |

Red labels are provided for safety I/O modules.

### References

#### Safety analog input modules

| Type of input             | Input signal range | Resolution | Connection  | Nb of channels | Reference  | Weight kg/lb |
|---------------------------|--------------------|------------|---|----------------|------------|--------------|
| Isolated high level input | 4–20 mA            | 16 bits    | Removable terminal block, 20-way caged, screw clamp, or spring-type | 4              | BMXSAI0410 | 0.143/0.315  |

#### Connection accessories for safety analog input module

| Description                      | For use with modules | Type composition | Reference  | Weight kg/lb |
|----------------------------------|----------------------|------------------|------------|--------------|
| 20-way removable terminal blocks | BMXSAI0410           | Caged            | BMXFTB2000 | 0.093/0.205  |
|                                  |                      | Screw clamp      | BMXFTB2010 | 0.075/0.165  |
|                                  |                      | Spring           | BMXFTB2020 | 0.060/0.132  |


(1) LEDs in positions 4...7 are not used because the input module includes only four channels.

(2) No cordset is provided for cabling safety X80 I/O modules. Too many options are possible according to the kind of:

- applications: full safety, safety mixed with availability, etc.
- safety level: SIL3/Cat2, SIL3/Cat4, SIL2, etc.

For more information on the different cabling options, please refer to detailed user manuals published on our website: [www.schneider-electric.com](http://www.schneider-electric.com).

(3) Connectors are equipped with captive screws: max. tightening torque 0.5 N.m/0.37 lb-ft.

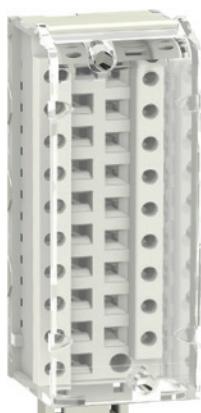

BMXFTB2000



---


## Drop adapters

- Modicon X80 CRA Ethernet drop adapters ..... page 5/2
- Modbus/TCP and EtherNet/IP network modules ..... page 5/4
- Modicon X80 NRP EIO drop fiber optic repeaters ..... page 5/5
- NOS Ethernet network option switch ..... page 5/5
- Peripheral Remote I/O Adapter ..... page 5/6

## Communication, integrated ports, and modules

- Selection guide* ..... page 5/8

- **RTU communication systems** ..... page 5/10
  - Presentation ..... page 5/10
  - Description, functions ..... page 5/12
  - References ..... page 5/13
- **BMXNGD0100 Global Data service module** ..... page 5/14
  - Presentation, description ..... page 5/14
  - References ..... page 5/15
- **BMXEIA0100 master module** ..... page 5/16
  - Presentation, description ..... page 5/16
  - References ..... page 5/17
- **Modbus and Character mode serial links** ..... page 5/18
  - Presentation, description ..... page 5/18
  - Complementary characteristics, references ..... page 5/19
- **BMECXM0100 CANopen master module** ..... page 5/20
  - Presentation, description ..... page 5/20
  - References ..... page 5/21
- **BMENOP0300 IEC 61850 communication module** ..... page 5/22
  - Presentation ..... page 5/22
  - Description, references ..... page 5/23
- **PMXNOW0300 Wi-Fi access point** ..... page 5/24
  - Presentation, characteristics ..... page 5/24
  - References ..... page 5/25

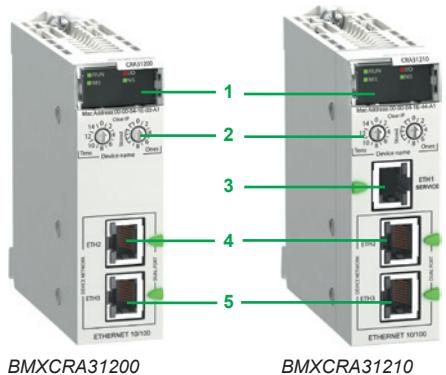

### Modicon X80 CRA Ethernet drop adapters (1)/(2)

#### Presentation

A Quantum EIO architecture with Modicon X80 EIO drops requires the use of a dedicated CRA drop adapter in each Modicon X80 drop:

- “Standard” drop adapter **BMXCR31200** (capacity, see below)
- “Performance” drop adapter **BMXCR31210** (capacity, see below)

These drop adapters are connected by Ethernet cordsets equipped with RJ45 connectors. The dual Ethernet network connection port on each drop adapter allows *Daisy Chain Loop* connections using the RSTP protocol (*Rapid Spanning Tree Protocol*).

Each module uses one slot in the Modicon X80 rack.

The **BMXCR31210** adapter is also available in a conformal coating version for harsh environments.

#### Capacity of Quantum EIO architectures with Modicon X80 EIO

- 1 Quantum CPU drop that can have one primary rack and one secondary rack (3), equipped with a **140CPU6\*\*\*\*** advanced CPU
- With **140CPU651\*\*** standard CPUs and the **140CPU67160** HSBY CPU:
  - Up to 16 Modicon X80 EIO drops, limited to a maximum of 31 EIO drops (Quantum + Modicon X80)
  - With the **140CPU65260** standard CPU and **140CPU67260** HSBY CPUs:
    - Up to 31 Modicon X80 EIO drops, limited to a maximum of 31 EIO drops (Ethernet Quantum and Modicon X80)
    - Each Modicon X80 EIO drop can comprise one primary rack and one secondary rack (3)
      - Distance:
        - 100 m/328 ft between stations (copper medium)
        - 2 km/1.25 mi between Modicon X80 drops, with **BMXNRP0200** multimode fiber optic repeaters
        - 16 km/9.94 mi between Modicon X80 drops, with **BMXNRP0201** single-mode fiber optic repeaters

#### Description

- 1 Display block indicating the module status
- 2 Rotary switches for addressing EIO drops (00...159)
- 3 On **BMXCR31210** module: dedicated RJ45 SERVICE port for remote service tools such as a PC, an HMI terminal, or Ethernet DIO devices (identical to the SERVICE port on Quantum CRP/CRA modules, see page 2/6)
- 4 RJ45 DEVICE NETWORK port for connection to the Ethernet network
- 5 RJ45 DEVICE NETWORK port for connection to the Ethernet network

(1) For additional characteristics, see our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) Requires Unity Pro Extra Large software ≥ V7.0.

(3) Requires two **BMXXBE1000** rack expansion modules (one in the primary rack and one in the secondary rack) and a **BMXXBC\*\*\*K** extension cable (0.8, 2, or 28 m/2.62, 6.56, or 91.86 ft) for connecting these two modules. See page 2/8.



BMECRA31210

### Modicon X80 performance EIO adapter

#### Presentation

An M580 Ethernet RIO (EIO) architecture with Modicon X80 I/O drops requires the use of a dedicated adapter in each Modicon X80 drop.

The **BMECRA31210** adapter supports Ethernet and X-bus communications across the remote backplane.

This EIO adapter module supports several expert modules such as counter and weighing modules and CCOTF (change configuration on the fly).

For Modicon X80 RIO drops on an Ethernet backplane, time stamping can be managed with a resolution of 10 ms when using a **BMECRA31210** performance EIO adapter.

Only one **BMECRA31210** module can be installed per Modicon X80 RIO drop.

This module can also support a BMXXBP●●00 expansion rack.

The **BMECRA31210** adapter is designed to be installed on an Ethernet backplane in the main remote rack. The adapter supports the Modicon X80 I/O and partner modules with both Ethernet and X-bus connections (7).

The keying pin on the rear side of the module means the **BMECRA31210** adapter cannot be installed on unsupported backplanes.

These adapters are connected by Ethernet cordsets equipped with RJ45 connectors. The dual Ethernet connection port on each adapter allows daisy chain loop connections using the RSTP protocol (Rapid Spanning Tree Protocol).


The **BMECRA31210** adapter is also available in a conformal coating version for harsh environments.

### Capacity of the Modicon CRA drop adapter

| Type of module                   | BMXCRA31200<br>“standard”  | BMXCRA31210<br>“high performance” | BMECRA31210<br>“high performance” |
|----------------------------------|--|-----------------------------------|-----------------------------------|
| Maximum number of racks per drop | Up to 2  | Up to 2                           | Up to 2                           |
| SERVICE port                     | –  | 1                                 | 1                                 |
| Discrete I/O modules             | Up to 128  | Up to 1024                        | Up to 1024                        |
| Analog I/O module                | Up to 16   | Up to 256                         | Up to 256                         |
| Expert modules supported:        | <ul style="list-style-type: none"> <li>■ Serial link – <b>BMXNOM0200</b> <b>BMXNOM0200</b></li> <li>■ Time and date stamping at 1 ms – <b>BMXERT1604T</b> <b>BMXERT1604T</b></li> <li>■ Counter – <b>BMXEHC0200/</b> <b>BMXEHC0200/</b><br/><b>BMXEHC0800</b> <b>BMXEHC0800</b></li> <li>■ Weighing – – <b>PMESWT0100</b></li> <li>■ Frequency input – <b>BMXETM0200H</b> <b>BMXETM0200H</b></li> <li>■ HART integrated analog I/O modules – – <b>BMEAHI0812/</b> <b>BMEAHO0412</b></li> </ul> |                                   |                                   |
| CCOTF function                   | –  | Yes                               | Yes                               |
| Time and date stamping           | –  | 10 ms                             | 10 ms                             |

### Description

- 1 LED display block indicating the module status
- 2 Rotary switches for setting the address of an EIO drop (00...159)
- 3 Dedicated RJ45 service port (ETH 1) for remote service tools such as a PC, HMI terminal module, or Ethernet DIO devices
- 4 RJ45 device network port (ETH 2) for connection to the Ethernet network
- 5 RJ45 device network port (ETH 3) for connection to the Ethernet network

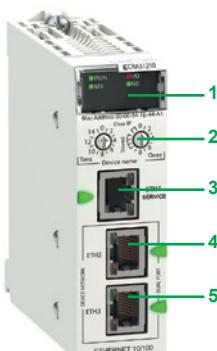


BMECRA31210

### References

#### Ethernet drop adapter


| Description   | SERVICE port | Reference          | Weight kg/lb |
|---|--------------|--------------------|--------------|
| X80 EIO drop adapter<br>Provide one module per Modicon X80 EIO drop | 1            | <b>BMECRA31210</b> | –            |

(1) This module is also compatible with X-bus backplanes. In this case it has the same functionality as a **BMXCRA31210** performance Ethernet drop adapter. For more details see our website [www.schneider-electric.com](http://www.schneider-electric.com).

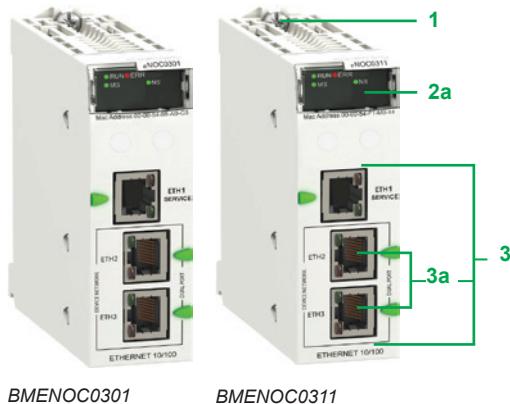

BMENOC0301

BMENOC0311

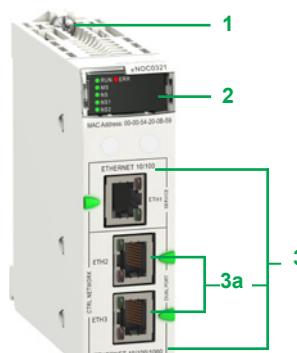

BMENOC0321



Example of BMEP58 and NOC module combination:  
BMEP581020/BMENOC0301/BMENOC0301

## Presentation

**BMENOC03•1** network modules act as an interface between the M580 PLC and other Ethernet network devices via the Modbus/TCP and EtherNet/IP communication protocols.

**BMENOC03•1** network modules are standard format and occupy a single slot in the rack of the Modicon M580 platform. They have to be installed in the main Ethernet + X-bus backplane rack.

## Functions

**BMENOC03•1** modules offer the following functions:

- Modbus/TCP and EtherNet/IP protocols operating simultaneously
- Ring topologies on 2 Ethernet ports using RSTP (Rapid Spanning Tree Protocol)
- Priority of Ethernet packets using QoS (Quality of Service) service
- Automatic module configuration recovery using FDR (Fast Device Replacement) service
- Embedded web server for application monitoring and module diagnostics (this is an HTML5 web server, which means it can be read by any device (PC, tablet, smartphone) with the majority of operating systems (Android, iOS, Windows))
- Sharing data between PLCs ("local slaves" function)
- Network management using SNMP (Simple Network Management Protocol)

## Description

The front panel of **BMENOC03•1** modules features:

1 A screw for locking the module in a slot in the rack

2 A display block with 4 LEDs:

- RUN LED (green): Operating status
- ERR LED (red): Error detected
- MS LED (green/red): Module status
- NS LED (green/red): Network connection status

Additionally for **BMENOC0321** modules, 2 LEDs are displayed as:

- NS1 LED (green/red): Ethernet network status
- NS2 LED (green/red): Ethernet network status

3 3 RJ45 connectors for connection to the Ethernet network. The 2 bottom connectors **3a** support ring topologies (RSTP protocol).

Each RJ45 connector has 2 associated LEDs:

- LNK LED (yellow): Ethernet link established
- ACT LED (green): Transmission/reception activity

## FactoryCast

**BMENOC0311/BMENOC0321** FactoryCast modules provide additional web-based visualization of ePAC diagnostics and system data, such as:

- Custom web pages: allow the user to define a personalized interface
- Rack Viewer: provides a graphical representation of the configured ePAC system including all modules and I/O status
- ePAC Program Viewer: provides a web-based view of the Unity Pro program code that animates logical states and variable values
- Customizable dashboard: allows a customized widget to be added to provide an optimum overview of the process data
- Trend Viewer: provides a graphical visualization of the variables
- Easy brand labeling: the website logo and colors can be adjusted online

## Embedded router

The **BMENOC0321** embedded router provides bridge transparency from the control network to the device network and connectivity with functions such as:

- Embedded IP forwarding: enables communication from the control network to PACs, PLCs, PCs, HMI, etc.
- IPSec feature: applicable when the IP forwarding function is disabled
- Time synchronization: to be able to synchronize with external time servers and update the internal clock
- SMTP (Email): to send messages and alerts about the ePAC system
- Embedded switch in the M580 platform: provides a direct connection to the processor without any cable, and no separate power supply is required
- Fast Device Replacement service
- Multiple diagnostics: supports advanced web pages to FactoryCast, MB Diagnostics, EIP Diagnostics, CNM (ConneXium Network Manager)

## Combination of Ethernet modules and BMEP58 CPU

It is possible to combine Ethernet modules with the Modicon M580 CPU in order to increase its connectivity (1).

In this example, the 3 NOC EtherNet/IP, Modbus/TCP network modules **5** are linked to the BMEP58•0•0 CPU module **4**:

**4 BMEP581020** CPU

**5 BMENOC03•1** EtherNet/IP, Modbus/TCP network module

(1) For each M580 processor, up to 2 **BMENOC0321** modules can be integrated in the same rack.

## Modicon X80 EIO drop fiber optic repeaters (1)(2)

### Presentation

BMXNRP0200/0201 fiber optic repeaters offer an alternative to the use of ConneXium managed dual ring switches (DRS), for fiber optic communications over long distances in Ethernet I/O systems.


When inserted in Modicon X80 EIO drops, BMXNRP0200/0201 fiber optic repeaters make it possible to:

- Extend the total distance of the EIO network when EIO drops are located in areas of the factory more than 100 m/328 ft away
- Enhance immunity to noise
- Resolve grounding incompatibilities between sites with different grounding methods

NRP repeaters can be installed on the primary ring or on secondary rings. These modules cannot, however, be used to connect secondary rings to the primary ring. The BMXNRP0200 repeater for multimode optical fiber allows remote location up to 2 km/1.25 mi.

The BMXNRP0201 repeater or single-mode optical fiber allows remote location up to 16 km/9.94 mi.

Depending on the configuration, the NRP repeater may be linked to the CRA adapter of the drop where it is installed, via 1 or 2 Ethernet Interlink cables.

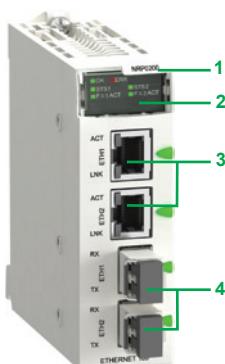

BMXNRP0200

### Description

- 1 Module reference
- 2 Display block indicating the module status
- 3 RJ45 Ethernet ports. 2 LEDs, LNK and ACT, indicate the status of each port
- 4 Fiber optic ports with SFP transceiver for LC type connector

## References (1)

### Modicon X80 EIO drop fiber optic repeaters (2)

| Description                                | Optical fiber | Reference  | Weight kg/lb |
|--|---------------|------------|--------------|
| Modicon X80 EIO drop fiber optic repeaters | Multimode     | BMXNRP0200 | -            |
|  | Single-mode   | BMXNRP0201 | -            |

5

## Ethernet network option switch

### Presentation

The BMENOS0300 Ethernet network option switch offers an economic alternative to external DRSs for copper Ethernet communication over short distances. Based on the rotary switches on the front panel, the application of the 2 device network ports can be configured intuitively as:

- RIO ring
- DIO ring
- DIO ports

Depending on the architecture, the BMENOS0300 switch can be used to communicate with the distributed I/O by simply inserting it in the local main rack or remote drops.


### Description

- 1 Module reference
- 2 Display block indicating the module status
- 3 Rotary switch for configuring the ETH 1 service port
- 4 Rotary switch for configuring the 2 device network ports (ETH 2 and ETH 3)
- 5 ETH 1: Service port (Ethernet)
- 6 ETH 2 / ETH 3: Device network port (Ethernet)

## References (1)

### Ethernet network option switch


| Description                    | SERVICE port | Device network port (Ethernet) | Reference  | Weight kg/lb |
|--------------------------------|--------------|--------------------------------|------------|--------------|
| Ethernet network option switch | 1            | 2                              | BMENOS0300 | -            |

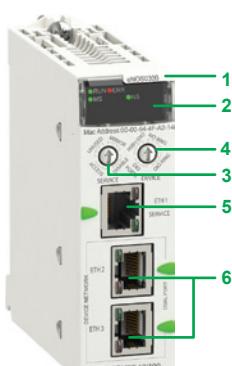

BMENOS0300

(1) For additional characteristics, see our website [www.schneider-electric.com](http://www.schneider-electric.com).

(2) Requires Unity Pro Extra Large software ≥ V7.0, see our website [www.schneider-electric.com](http://www.schneider-electric.com).

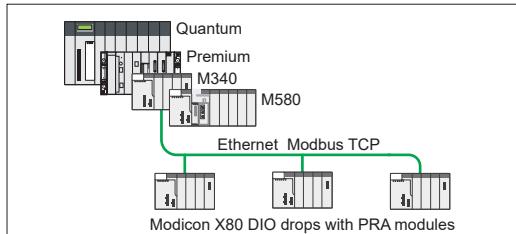

Modicon X80 DIO drops in a Quantum/Premium/M340/M580 I/O architecture using Ethernet Modbus TCP

## Presentation

The Peripheral Remote I/O Adapter (PRA) is specifically dedicated for Modicon X80 DIO drops in a Quantum/Premium/M340/M580 I/O architecture using Ethernet Modbus TCP.

The BMXPRA0100 module manages a remote X80 I/O rack on Ethernet Modbus TCP which includes:

- discrete I/O modules
- analog I/O modules

It communicates by I/O scanning with the master PAC (Quantum/ Premium/M340/ M580).

In case of a redundant Ethernet link, the use of a BMXNOE0100 Ethernet module is necessary.

## Principal characteristics

### Primary racks per drop

Up to 4

### Discrete I/O modules

Up to 1024

### Analog I/O modules

Up to 256

### Intern memory

Up to 448 kBits

### Memory card capacity

Up to 96 kBits

### Average consumption

95 mA

### Dissipated power

2.3 W

### Savable real time clock

Yes

## Description

- 1 Module reference
- 2 Display block indicating the module status
- 3 Protected memory card port
- 4 RJ45 Ethernet port



PF122339A



BMXPRA0100

### Reference (1)

| Description   | Reference  | Weight<br>kg/lb |
|---|------------|-----------------|
| Peripheral Remote I/O Adapter<br>Provide 1 module per Ethernet<br>Modbus TCP DIO drop | BMXPRA0100 | —               |

(1) Requires Unity Pro software ≥ V4.1.

# Modicon X80 I/O platform

## Communication, integrated ports, and modules

| Applications  |   | RTU communication  |  |
|---|---|--|--|
| Type of device  | RTU module  |  |  |
| <b>Network protocols</b>  |   |  |  |
| Structure   | Physical interface  |   |  |
| Type of connector   | 10BASE-T/100BASE-TX (Modbus/TCP), PPPoE (Point-to-Point Protocol over Ethernet) for ADSL external modem link              | Non-isolated RS 232/485 (serial link), non-isolated RS 232 (radio, PSTN, GSM, GPRS/3G external modem link)                 |  |
| Access method   | One RJ45 connector  | One RJ45 connector   |  |
| Data rate   | CSMA-CD (Modbus/TCP), Master/slave (IEC 104/DNP3)   | Master/slave (IEC101/DNP3)   |  |
| Medium  | 10/100 Mbps (Modbus/TCP)  | 0.3...38.4 Kbps (serial link)  |  |
| Configuration   | Double twisted pair copper cable, category CAT 5E, optical fiber via ConneXium cabling system                             | Double shielded twisted pair copper cable, crossover serial cable (serial link), direct serial cable (external modem link) |  |
| Maximum number of devices   | 128 (Modbus/TCP), 64 slaves/servers (IEC 104/DNP3)  | 32 max.  |  |
| Max. length   | 100 m/328 ft (copper cable), 4,000 m/13,123 ft (multimode optical fiber), 32,500 m/106,627 ft (single-mode optical fiber) | 1,000 m/3,281 ft (serial link with insulating case)  |  |
| Number of modules of the same type per station                            | 2 Ethernet or RTU modules per station with any BMXP34 or BMEP58 processor   | Depending on application-specific channels (20/64 application-specific channels with BMXP34/BMEP58)                        |  |
| <b>Standard services</b>  |   |  |  |
| <b>Transparent Ready conformity class</b>                                 |   |  |  |
| Embedded web server services  | Standard services   | Modbus/TCP messaging   | Reading/writing discrete and analog I/O, counters                                  |
|   | Configurable services   | C30  | –  |
| Transparent Ready communication services                                  | I/O Scanning  | Rack Viewer PLC diagnostics, Data Editor access to PLC data and variables  | –  |
|   | Global Data   | –  | –  |
|   | NTP time synchronization  | –  | –  |
| RTU communication services  | FDR   | –  | –  |
| IEC 60870-5-104, DNP3 IP or IEC 60870-5-101, DNP3 serial                  | SMTP e-mail notification  | –  | –  |
|   | SOAP/XML web service  | –  | –  |
|   | SNMP network management   | –  | –  |
|   | RSTP redundancy   | –  | –  |
|   | QoS (Quality of Service)  | –  | –  |
| RTU communication services  | Master or Slave configuration   | Yes, IEC101/104 and DNP3   | –  |
| IEC 60870-5-104, DNP3 IP or IEC 60870-5-101, DNP3 serial                  | Time and date stamped data exchange   | Interrogation via polling and exchanges on change of status (RBE), unsolicited messaging                                   | –  |
|   | RTU time synchronization  | Yes, IEC101/104 and DNP3   | –  |
|   | Management and buffering of time and date stamped events  | Yes, IEC101/104 and DNP3   | –  |
|   | Automatic transfer of time and date stamped events to the Master/SCADA  | Yes, IEC101/104 and DNP3<br>Buffer holding 10,000 events (per connected client, 4 clients max.)                            | –  |
| Data Logging service  | Compatibility with processor  | Yes, on 128 MB SD memory card, in CSV files, access via FTP, or sent by e-mail   | –  |
| Processor or module references depending on other type of integrated port | No other integrated port  | Standard and Performance M340 processors   | –  |
|   | Serial link   | All M580 processors  | –  |
|   | Ethernet Modbus/TCP   | <b>BMXNOR0200H</b>   | <b>BMXNOR0200H</b>   |
| Page  | 5/13  |  |  |

| Applications   |   | AS-Interface communication   | Serial link communication   | CANopen communication   | IEC 61850 communication   |
|--|---|--|---|---|---|
| Type of device   | AS-Interface actuator/sensor bus module                         | 2-channel serial link module   | CANopen master module   | IEC 61850 Ethernet module   |   |
| <b>Network protocols</b>                                       |   |  |   |   |   |
| Structure  | Physical interface  |   |  |                                        |      |
| Type of connector  | Non-isolated RS 232, 8-wire<br>Isolated RS 485, 2-wire          | Master/slave   | 9-way SUB-D   | ISO 11898 (9-way SUB-D connector)   | 10BASE-T/100BASE-TX   |
| Access method  | 3-way SUB-D   | 2 RJ45 and 1 RJ45  | –   | –   | 3 RJ45 connectors (2 connectors for a ring topology) plus Ethernet backplane connection |
| Data rate  | 167 Kbps  | 0.3...115.2 Kbps in RS 232<br>0.3...57.6 Kbps in RS 485  | 500 Kbps at 100 m/328 ft<br>1 Mbps at 20 m/65.62 ft                                 | 10/100 Mbps   |   |
| Medium   | 2-wire AS-Interface cable                                       | Shielded twisted pair copper cable   | Twisted shielded pair cable   | Double twisted pair copper cable, category CAT 5E   |   |
| Configuration  | Maximum number of devices                                       | 62 slaves  | 63 slaves   | 16 clients, 32 IED servers  |   |
| Max. length  | 100 m/328 ft, 500 m/1,640 ft max. with 2 repeaters              | 15 m/49.21 ft with non-isolated RS 232, 1,000 m/3,280 ft with non-isolated RS 485  | 100 m/328 ft, 2,500 m/8,202 ft with repeater  | 100 m/328 ft (copper cable), 4,000 m/13,123 ft (multimode optical fiber), 32,500 m/106,627 ft (single-mode optical fiber) |   |
| Number of links of the same type per station                   | BMXP341000 processor:<br>2 AS-Interface modules                 | 20/36 application-specific channels with BMXP341000/P342●●●● (1 application-specific channel = 1 counter, motion control module, or serial link channel) | –   | –   |   |
| Number of links of the same type per station                   | BMXP3420●0 or BMEP58 processor:<br>4 AS-Interface modules       | 36 application specific channels max.<br>2 BMXNOM0200 modules per BM●CRA31210 Ethernet drop adapter  | –   | Up to 4 Ethernet modules per station depending on processor   |   |
| Number of links of the same type per station                   | BM●CRA31210 Ethernet drop adapter:<br>2 AS-Interface modules    | All M580 processors:<br>36 application-specific channels   | –   | –   |   |
| Standard services  | Transparent exchanges with the sensors/actuators                | Read/write bits and words, diagnostics in Modbus mode<br>Send and receive character string in Character mode   | Transparent exchanges with CANopen slaves and Ethernet-based processors             | IEC 61850 MMS Client, Server, GOOSE, SNMP, RSTP, NTP Client   |   |
| Conformity class   | M4 profile  | –  | EDS description files of the slaves   | –   |   |
| SMTP e-mail notification service                               | –   | –  | –   | –   |   |
| Compatibility with processor                                   | Standard and Performance M340 processors<br>All M580 processors | M580 standard processors   | All M580 processors   |   |   |
| Type of processor or module depending on other integrated port | None  | Serial link  | Ethernet Modbus/TCP   |   |   |
| Page   | 5/17  | 5/20   | 5/22  |   |   |


### Presentation

RTU systems are designed to meet the needs of the water industry, the oil and gas sector, and other infrastructures, where remote monitoring and telecontrol are essential to the good management of sites and substations spread over a wide geographical area.

RTU protocols and Telemetry systems provide robust, reliable means of communication which are suitable for the process values, maintenance, and remote monitoring needs of infrastructures disseminated over a vast geographical area which may be difficult to access.

An RTU system consists of the following elements:

- A Telemetry Supervisor (SCADA) in a central control room
- A network infrastructure and a variety of suitable communication methods (LAN, WAN, modems, etc)
- A large number of RTU substations geographically distributed throughout the field

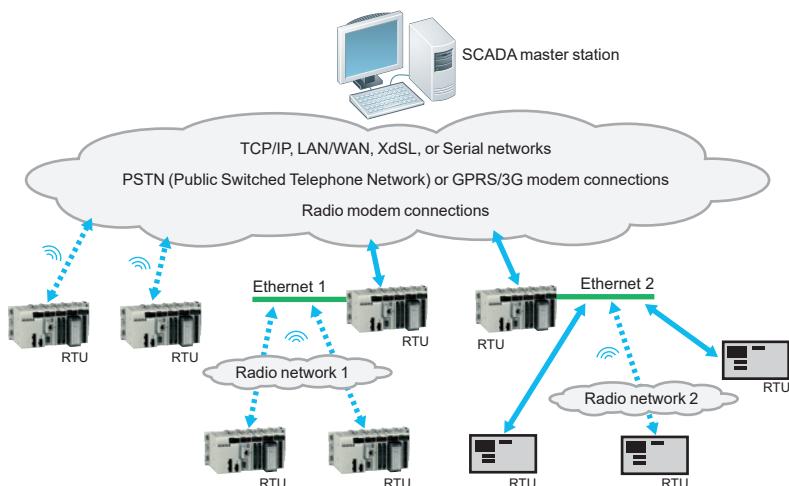

*Example of an RTU system architecture*

### Main functions

The main RTU system functions are as follows:

- Remote communications:
  - Between remote RTU sites (coordination, synchronization)
  - With the SCADA host system, controlling the central operator station (monitoring, alarm reports) and centralized databases (archiving of alarms or events)
  - With the on-call staff (alarm indication)
  - With the technical station (diagnostics, maintenance)
- Data acquisition, processing, and memorization:
  - Process data sampling using standard or dedicated sensors, validation
  - Exchange of data with other devices within the station, including controllers and operator consoles
  - Use of discrete or analog I/O, serial links, fieldbuses, and LANs
  - Event detection, time and date stamping, prioritization, and logging as required by the application
- Other functions:
  - IEC 1131-3 programmable control: forcing, access control, load sharing, servo control
  - Data logging
  - Alarm and report notification by e-mail/SMS
  - Web HMI: displaying the process, alarm handling, trend analysis, telecontrol

### Presentation (continued)

Currently, people working in the industrial Telemetry sectors use standard protocols for communication between control centres (SCADA) and RTU stations.

The most commonly used protocols are as follows:

- IEC 60870-5: IEC (International Electrotechnical Commission), in particular IEC 60870-5-101/104 (commonly known as IEC 101 or 104)
- DNP3: Distributed Network Protocol version 3

DNP3 is the predominant protocol in North America, Australia, and South Africa whereas, in certain European countries, the IEC protocol is required by the legislation. IEC is also commonly used in the Middle East.

The geographical distribution of these protocols is as follows:

- DNP3: North America, Australia, New Zealand, UK, Asia, South America, etc.
- IEC 60870-5: Europe, Middle East, Asia, South America, etc.

These protocols offer similar functions.

They are both particularly suited to "transient communications" (modem, radio) and data exchanges with limited bandwidth for the following reasons:

- They transfer data in a very robust and reliable manner between the SCADA system and the RTU devices
- They are essentially "event-triggered" protocols (exchanges on changes of state, exchanges of time and date stamped events).

They offer the following transmission modes:

- Interrogation via polling
- Data exchanges on changes of state (*RBE: Report By Exception*)
- Unsolicited messaging (a slave station can start an exchange of data with the master station)

Both protocols offer native data management and time and date stamped events:

- Time synchronization between the master station and auxiliary stations via protocol functions
- Time and date stamping of data and events
- Automatic transfer of time and date stamped events between the RTU stations and SCADA (control room)

### **Presentation (continued)**

The **BMXNOR0200H** communication module integrates the RTU (*Remote Terminal Unit*) functions and protocols in the Modicon X80 I/O platform for industrial Telemetry applications and other widely distributed infrastructures.

The **BMXNOR0200H** module can be used to connect an RTU X80 I/O PLC directly to a Telemetry supervisor or to other RTU stations, via the standard DPN3 protocols (subset level 3) or IEC 60870-5-101/104 with different connection methods: Ethernet TCP/IP, LAN, WAN, serial link, or modem connections (radio, PSTN, GSM, GPRS/3G, ADSL).

The **BMXNOR0200H** module is designed to operate in a harsh environment (conformal coating), in an extended temperature range (-25 to +70 °C/-13 to +158 °F).

### **Functions**

The **BMXNOR0200H** module offers the following functions:

- Upstream RTU communication to the SCADA (server or slave mode)
- Downstream RTU communication to field devices (master mode)
- RTU protocols: Time synchronization, exchanges of time and date stamped data via polling (on change of state and unsolicited), management of time and date stamped events
- Application Data Logging with time and date stamping in the module Flash memory card
- Event notifications via e-mail or SMS
- Embedded Web server for setting the RTU protocol parameters, diagnostics, and monitoring
- Communications on Ethernet port:
  - 10BASE-T/100BASE-TX physical interface
  - Modbus/TCP protocol (client and server)
  - Integrated RTU protocols for Ethernet communications: DNP3 IP (client or server) and IEC 60870-5-104 (over IP) (client or server)
  - Connection of ADSL external modem on the Ethernet port, via the PPPoE (*Point-to-Point Protocol over Ethernet*) protocol
  - Advanced Ethernet functions: NTP client, FTP client or server, HTTP server, SOAP/XML server, SNMP agent, SMTP agent
- Communications on serial port:
  - Isolated RS232/RS485 point-to-point serial links
  - Integrated RTU protocols for serial and modem communications: IEC 60870-5-101 (master or slave) and DNP3 serial (master or slave)
  - Connection of external modems (radio, PSTN, GSM, GPRS/3G) via the PPP (*Point-to-Point Protocol*) protocol

### **Description**

The **BMXNOR0200H** module can be installed in either a standard or "ruggedized" configuration, equipped with a standard **BMXP34••••• /BMEP58•••••** or "ruggedized" **BMXP34•••••H/BMEP58••••H** processor.

The front panel of the **BMXNOR0200H** module features:

- 1 A screw for locking the module in a slot in the rack
- 2 A display block with 8 LEDs, 4 of which relate to the serial and Ethernet communication ports
- 3 A slot for a Flash memory card (SD card), with protective cover
- 4 An RJ45 connector for the connection to the Ethernet network
- 5 An RJ45 connector for connection of the serial link or an external modem

**On the rear panel**, 2 rotary switches for selecting the IP address assignment method for the module.





BMXNOR0200H

| References                          |                                    |  |                        |                 |
|-------------------------------------|------------------------------------|--|------------------------|-----------------|
| Description                         | Communication port                 | Protocol   | Reference              | Weight kg/lb    |
| <b>RTU communication module (1)</b> | Ethernet<br>10BASE-T<br>100BASE-TX | <ul style="list-style-type: none"> <li>■ Modbus/TCP (client or server), Transparent Ready class C30</li> <li>■ DNP3 IP (client or server)</li> <li>■ IEC 60870-5-104 (over IP) (client or server)</li> </ul> | <b>BMXNOR0200H (2)</b> | 0.205/<br>0.452 |
| Serial, External modems             |                                    | <ul style="list-style-type: none"> <li>■ Isolated RS232/RS485 point-to-point serial links</li> <li>■ DNP3 serial (master or slave)</li> <li>■ IEC 60870-5-101 (master or slave)</li> </ul>                   |                        |                 |


| Spare parts  |  |                      |                     |                 |
|--|--|----------------------|---------------------|-----------------|
| Description  | Usage  | Supplied with module | Reference           | Weight kg/lb    |
| <b>128 MB Flash memory card</b> supplied as standard with the module | Web pages, Storage of data logging files (CSV) | <b>BMXNOR0200H</b>   | <b>BMXRWS128MWF</b> | 0.002/<br>0.004 |

(1) See ruggedized module characteristics, page 6/2.

(2) The Web Designer software is supplied on CD-ROM with the module. This software can be used to configure and download the embedded website and to configure advanced services: data logging, sending alarm notifications via SMS or e-mail. For further information, please consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

## Presentation

### Global Data service

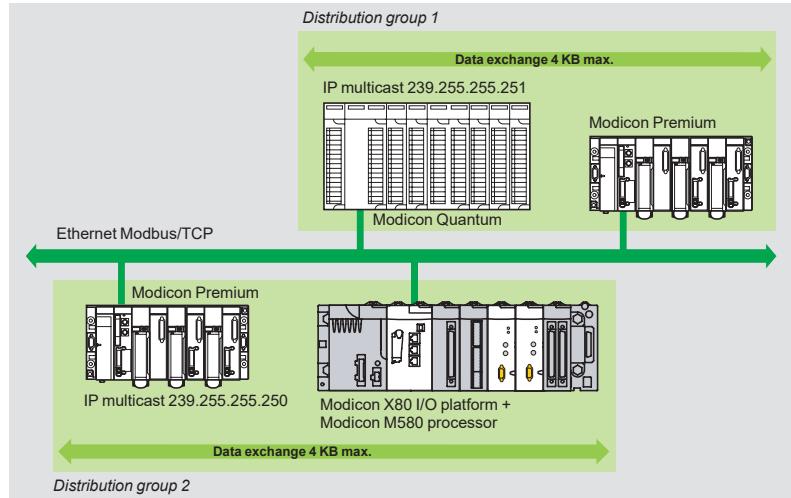


The Global Data service performs data exchanges in real time between stations belonging to the same distribution group. It is used to synchronize remote applications, or to share a common database between a number of distributed applications. Exchanges are based on a standard producer/consumer protocol, helping to ensure optimum performance with a minimum load on the network. This RTPS (Real Time Publisher Subscriber) protocol is promoted by Modbus-IDA (Interface for Distributed Automation), and is already a standard adopted by several manufacturers.

#### Characteristics

A maximum of 64 stations can participate in Global Data within a single distribution group. Each station can:

- Publish one 1024-byte variable. The publication rate can be configured between 10 ms and 1500 ms in increments of 10 ms.
- Subscribe to between 1 and 64 variables. The validity of each variable is controlled by status bits (*Health Status bits*) linked to a refresh timeout configurable between 50 ms and 15 s. Access to an element of the variable is not possible. The total size of subscribed variables amounts to 4 K contiguous bytes.

To further optimize the performance of the Ethernet network, Global Data can be configured with the “multicast filtering” option which, together with switches in the ConneXium range, broadcasts data only to Ethernet ports where there is a Global Data service subscriber station. If these switches are not used, Global Data is sent in “multicast” mode to all switch ports.

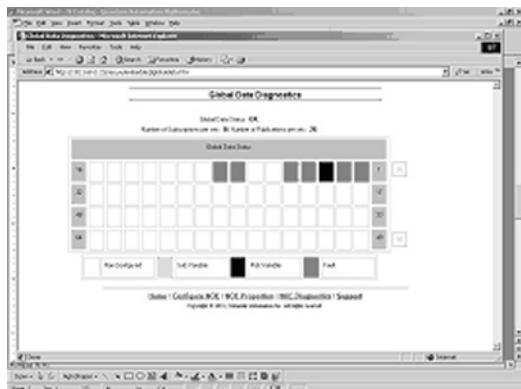

Global Data diagnostics


#### Global Data service diagnostics

The diagnostic screens use a color code to show the Global Data status:

- Configured/not configured/detected fault
- Published/subscribed

Global Data service diagnostics can be performed in one of four ways:

- Via the application program from a specific PLC data zone
- From the setup software debug screen
- From the PLC system diagnostic function displayed by means of a web browser on a PC station
- Using standard SNMP manager software

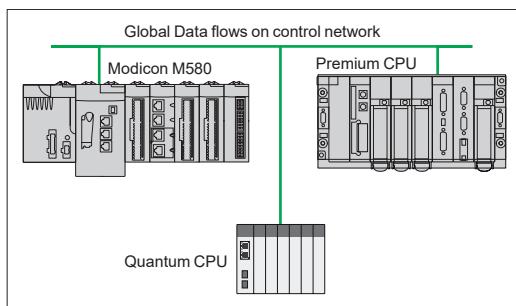

Example of architecture to implement BMXNGD0100



BMXNGD0100

## Description

### BMXNGD0100

The **BMXNGD0100** Ethernet Global Data module is specifically designed to modernize the large and complex Modicon installed base (mainly Premium and Quantum) by running the Global Data service more easily.

In addition to the Global Data service, the **BMXNGD0100** module also has the following embedded services, as it can also be used for inter-controller communication to provide solutions for complex processing and high-end applications:

- Ipcfg
- Modbus TCP explicit messaging (client and server)

Designed as a neat solution specifically for the Global Data service, some services, such as IO-Scanner, Web, FDR, and NTP, are not supported by the **BMXNGD0100** module. This module is only compatible with **BMEXBP●●●●** Ethernet racks in standalone architectures on the X80 platform, to keep the global data transferring internally only, isolated from the external world to help ensure a strict level of cybersecurity.


If these functions are required, please check with our Customer Care Center for alternative products that can fulfill these needs.

## References

| Description  | Usage   | Reference          | Weight kg/lb    |
|--|---|--------------------|-----------------|
| <b>The Ethernet Global Data module</b><br>supplied Flash memory card (BMXRWSC016M) | Inter-controller communication service to transfer global data between each controller for complex multi-controller architectures | <b>BMXNGD0100</b>  | 0.200/<br>0.440 |
| <b>Flash memory card</b>   | Store global data for applications  | <b>BMXRWSC016M</b> | 0.002/<br>0.004 |

## Presentation

The **BMXEIA0100** master module for AS-Interface cabling system provides the AS-Interface system master function for the Modicon X80 I/O platform.

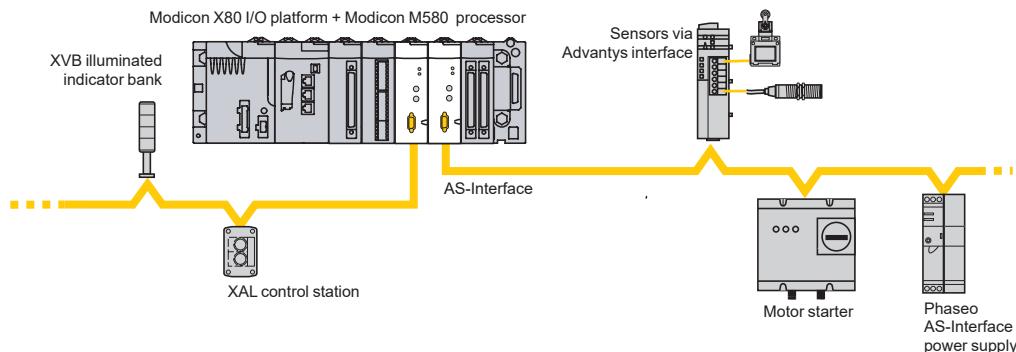

The AS-Interface cabling system consists of a master station (Modicon X80 I/O platform) and slave stations. The master supporting the AS-Interface profile interrogates the devices connected on the AS-Interface line one by one and stores the information (actuator/sensor status, device operating status) in the PLC memory. Communication on the AS-Interface line is managed totally transparently in relation to the application PLC program.

The **BMXEIA0100** master module supports the latest management profile for AS-Interface devices (*AS-Interface V3*), which is able to manage level V1, V2, and V3 AS-Interface slaves:

- Discrete slave devices (up to 62 devices of 4 inputs/4 outputs organized in 2 banks (A/B) of 31 addresses each)
- Analog devices (up to 31 devices (4 channels) in bank A)
- Safety interfaces (up to 31 devices in bank A)

An AS-Interface power supply is essential for powering the various devices on the line. Ideally it should be placed near stations that consume a great deal of energy. Please refer to the "Phaseo power supplies and transformers - AS-Interface range" catalog.


A Modicon M340 Performance configuration with a **BMXP3420•0/20•02** processor or a Modicon M580 configuration with a **BMEP58••••** processor can take 4 **BMXEIA0100** modules. A Standard configuration with **BMXP341000** processor can take 2 **BMXEIA0100** modules.

## Description

The **BMXEIA0100** AS-Interface master module is standard format (1 slot). Its housing provides IP 20 protection of the electronics and it is locked into each rack slot (**01 ....11**) by a captive screw.

The front panel of the **BMXEIA0100** AS-Interface master module features:

- 1 A rigid body providing support and protection for the electronic card
- 2 A module reference marking
- 3 A display block with 5 LEDs indicating the module operating modes:
  - RUN (green): Module running
  - ERR (red): Detected module fault
  - A/B (green): Displays the group of 31 slaves
  - I/O (red): Detected I/O fault on AS-Interface line
  - 32 LEDs for diagnostics of the AS-Interface line and each slave connected on the line depending on the A/B pushbutton selection (1)
- 4 2 LEDs marked ASI POWER and FAULT: AS-Interface external power supply present and AS-Interface line fault (see diagnostics on page 5/17)
- 5 Two pushbuttons marked A/B and MODE (see diagnostics on page 5/17)
- 6 A 3-way male SUB-D connector for the AS-Interface cable (female screw connector supplied)

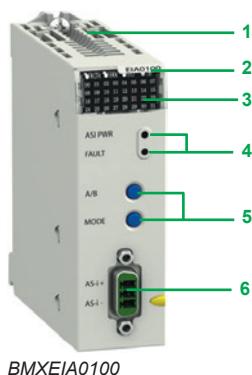

(1) Depending on whether A or B is selected, this displays either the first 31 slaves (standard addressing) or the last 31 slaves (extended addressing).



## Diagnostics

### BMXEIA0100 module

The two LEDs **4** on the module front panel are used in conjunction with the two pushbuttons **5** for module diagnostics:

#### LEDs

**4** ASI PWR:  
AS-Interface power supply present

**4** FAULT: Detected AS-Interface line fault

#### Pushbuttons

**5** A/B: Selects the group of slaves on the display block **3**

**5** MODE: Module Offline/Online

The display block on the front panel of the **BMXEIA0100** master module can be used to perform simplified local diagnostics by displaying the slave devices present on the AS-Interface line.

Detailed diagnostics of each of the slave devices is also possible using:

- The **ASITERV2** adjustment terminal
- A web browser using the Rack Viewer function in the standard Web server on the Modicon X80 I/O platform. For further information, please consult our website [www.schneider-electric.com](http://www.schneider-electric.com).


## References

| Description   | Usage  | Reference         | Weight kg/lb    |
|---|--|-------------------|-----------------|
| <b>AS-Interface master module</b><br>supplied with 3-way male SUB-D connector | M4 AS-Interface profile for level V1, V2, and V3 slaves  | <b>BMXEIA0100</b> | 0.340/<br>0.750 |
| <b>Adjustment terminal</b>  | For addressing and diagnostics of AS-Interface level V1, V2, and V3 interfaces<br>Powered by LR6 batteries | <b>ASITERV2</b>   | 1.000/<br>2.205 |



ASITERV2

### **Presentation**

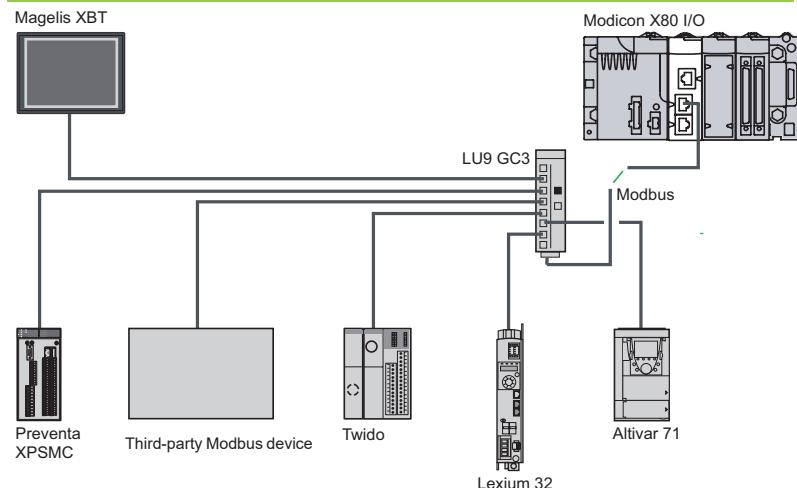

The Modbus serial link is used for master/slave architectures (it is necessary, however, to check that the Modbus services used by the application have been implemented on all relevant devices).

The bus consists of a master station and slave stations. Only the master station can initiate the exchange (direct communication between slave stations is not possible). Two exchange mechanisms are available:

- Question/response, where requests from the master are addressed to a given slave. The master then waits for the response from the slave that has been interrogated.
- Broadcasting, where the master broadcasts a message to all slave stations on the bus. The latter execute the order without transmitting a reply.
- It is necessary to use **BM•CRA31210** modules as drop adapters. On one drop it is possible to plug a maximum of two **BMXNOM0200** modules.

The following services are not available in the slave stations:

- Modbus slave
- Modem services

Although most processors have a serial link that can support modems, the **BMXNOM0200** 2-channel serial link module is particularly recommended for this type of use.


Its performance and numerous parameter-setting options make it ideal for any type of configuration, especially when using radio modems.

### **Description**

#### **BMXNOM0200 serial link module**

The front panel of the **BMXNOM0200** serial link module features:

- 1 A screw for locking the module in a slot in the rack
- 2 A display block with 4 LEDs:
  - RUN (green) and ERR (red): Module status
  - For each of the two channels: SER COM (green): Activity on the serial link (lit)/detected fault on a device present on the serial link (flashing)
- 3 Two RJ45 connectors (exclusive use) for connection of channel 0 (with black indicator):
  - 3a A connector for RS 232C connection, marked COM Port 0 RS232
  - 3b A connector for RS 485 connection, marked COM Port 0 RS485
- 4 An RJ45 connector for RS 485 connection of channel 1, marked COM Port 1 RS485, with black indicator

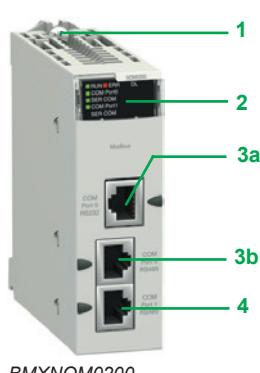

BMXNOM0200

#### **To be ordered separately:**

RS 485 cordsets (see our "Modicon M580 automation platform" catalog available on our website [www.schneider-electric.com](http://www.schneider-electric.com)) or RS 232 cordsets for DCE terminal (see page 5/19).

### Complementary characteristics

The following characteristics complement those indicated in the selection guide on page 5/9.

#### BMXNOM0200 module serial links

- Physical interface:
  - RS 232 port 0: RS 232 8-wire, non-isolated
  - RS 485 port 0 and port 1: RS 485 2-wire, isolated
- Frame:
  - Modbus: RTU/ASCII, full duplex in RS 232, half duplex in RS 485
  - Character mode: full duplex in RS 232, half duplex in RS 485
- Data rate:
  - RS 232 port 0: 0.3...115 Kbps (Modbus/Character mode)
  - RS 485 port 0 and port 1: 0.3...57.6 Kbps (Modbus/Character mode)
- Line polarization:
  - Modbus RS 485: automatic
  - RS 485 character mode: configurable with Unity Pro software
- Maximum length of a tap link in RS 485 2-wire:
  - 15 m/49.21 ft in a non-isolated link
  - 40 m/131.23 ft in an isolated link
- Expert mode (from version V1.2 of the module and version V5 of Unity Pro): used to configure the time out links individually from the application and thus adapt to the specific characteristics of certain modems.



BMXNOM0200

### References (1)

#### Serial link module

| Designation                      | Protocol  | Physical layer   | Reference  | Weight kg/lb    |
|----------------------------------|---|--|------------|-----------------|
| 2-channel serial link module (2) | Modbus master/slave RTU/ASCII, Character mode, GSM/GPRS modem | 1 non-isolated RS 232 channel (Port 0)<br>2 isolated RS 485 channels (Port 0 and Port 1) | BMXNOM0200 | 0.230/<br>0.507 |


#### Cordsets for RS 232 serial link (3)

| Designation  | Description   | Length m/ft             | Reference     | Weight kg/lb    |
|--|---|-------------------------|---------------|-----------------|
| Cordset for Data Terminal Equipment (DTE) (printer)          | Equipped with an RJ45 connector and a 9-way female SUB-D connector            | 3/<br>9.84              | TCSMCN3M4F3C2 | 0.150/<br>0.331 |
| Cordset for Data Communication Equipment (DCE) (modem, etc.) | Equipped with an RJ45 connector and a 9-way male SUB-D connector<br>RTS, CTS) | 4-wire (RX, TX,<br>9.84 | TCSMCN3M4M3S2 | 0.150/<br>0.331 |
|  | 8-wire (excluding RI signal)  | 3/<br>9.84              | TCSXCN3M4F3S4 | 0.165/<br>0.364 |


(1) Requires Unity Pro software ≥ V1.4.

(2) For the ruggedized version, **BMXNOM0200H**, see characteristics on page 6/8.

(3) RS 485 serial link connection (see our "Modicon M580 automation platform" catalog available on our website [www.schneider-electric.com](http://www.schneider-electric.com)).

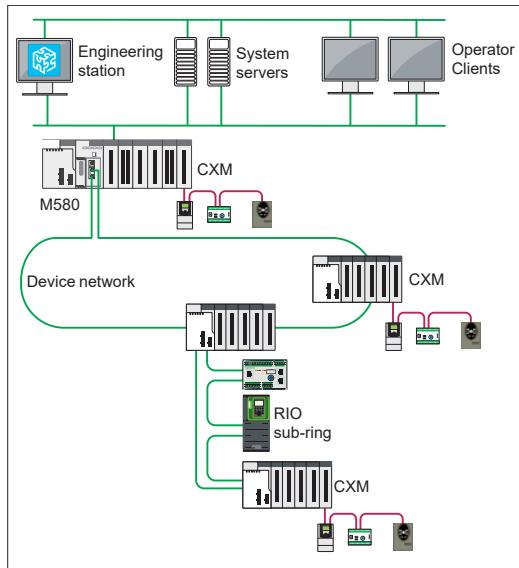

Typical topology to connect CANopen devices to M580/X80 platforms with BMECXM0100

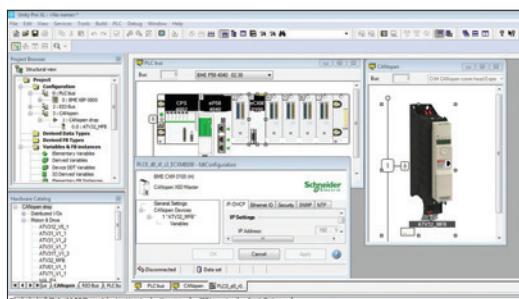

CANopen configuration in Unity Pro with BMECXM0100

## Presentation

CANopen is an open network supported by more than 600 companies worldwide, and promoted by CAN in Automation (CiA). With the general acceptance of CANopen, Schneider Electric has the accumulated and proven experience of applying CANopen in machine solution platforms.

CANopen helps to ensure reliable and deterministic access to real-time data in field devices. As a consequence, products using CANopen are increasingly used in control system architectures. The **BMECXM0100** CANopen master module provides powerful access to the CANopen slaves from the M580 local rack or a remote X80 drop.

## Advantages

**BMECXM0100** is designed to fulfill customer needs by offering the following advantages:

- Operational intelligence:
  - Complete software integration into Unity with a predefined catalog of preferred devices and numerous automated operations such as device variable creation, IP/DHCP settings, and IO scanner configuration
  - Simple integration of third-party devices
- Maintenance excellence:
  - Robust and well-designed with a long life cycle following X80 standards
  - Built to withstand extreme temperatures (-25 °C to +70 °C/-13 °F to +158 °F), ATEX certified
  - Easy diagnostics by maintenance engineers via a simple web browser (no need for Unity) and the FDR (Fast Device Replacement) service
- Investment protection: Totally flexible topologies with the possibility of using several **BMECXM0100** modules in a single M580, or in a remote I/O drop closest to the process
- Time-to-market: Simple, compact size, all in one, which reduces installation time
- Enhanced protection and security: Integrated cybersecurity design helps to protect plant operations

## Description

The **BMECXM0100** CANopen X80 master module is standard format (1 slot) and supports one CANopen port (SUB-D9 male connector).

The **BMECXM0100** supports up to 63 slaves with a maximum process image size of 4 Kbytes IN/4 Kbytes OUT.

Standardized baudrates between 20 Kbd and 1 Mbd (20 Kbd, 50 Kbd, 125 Kbd, 250 Kbd, 500 Kbd, 1 Mbd) are supported.

Depending on the performance level required by the process, the **BMECXM0100** module can be scanned by the RIO or the DIO scanner of the M580 CPU. RIO scanning helps to ensure optimum performance, in sync with the PLC task (MAST, FAST or AUX).

Several BMECXM modules can be connected to the same or different I/O scanners in the same M580 PAC.

**BMECXM0100** modules are not compatible with redundant M580 architectures, and cannot be scanned by an Ethernet module including **BMENOC03•1** and **BMXNOC0402**. See page 5/4 for more information.

Third-party CANopen slaves can only be configured in **BMECXM0100** modules from their EDS description files and via the hardware catalog manager. They cannot be configured from their DTM. Communication between the device and its DTM over Ethernet IO is also not supported.



BMECXM0100

## Diagnostics

### BMECXM0100

The 5 LEDs 1 on the module front panel are used for quick CANopen communication diagnostics:

| LED             | Color     | Description  |
|-----------------|-----------|--|
| I/O             | Red       | Indicates the exchange status with CANopen devices   |
| BS (Bus Status) | Red/Green | Indicates the EtherNet/IP connection status  |
|                 | Yellow    | Firmware upgrade in progress   |
| CAN RUN         | Green     | Indicates the status of the CANopen fieldbus   |
| CAN ERR         | Red       | Indicates the status of the CANopen physical layer and indicates detected errors due to missing CAN messages (SYNC, node-guarding, or heartbeat) |
| CAN COM         | Yellow    | Dedicated to SDO transmission  |

## References

| Description  | Usage   | Reference      | Weight kg/lb |
|--|---|----------------|--------------|
| CANopen X80 master module supplied with male 9-way SUB-D connector 2 | CANopen communication module used in M580/X80 Ethernet platform | BMECXM0100 (1) | -            |

(1) For the "Conformal coating" version BMECXM0100H, see page 6/9.

### Presentation

IEC 61850 is the latest worldwide standard for electrical utilities. It covers information modeling, configuration language, and communication networks. Initially developed for communication in substations, implementation of the standard has advanced at a remarkable rate since its introduction, with huge numbers of IEC 61850 devices having been installed. Now considered to be the de facto standard for substation automation, it is encompassing an increasing number of new application areas, such as:

- Wind power (IEC 61400-25)
- Distributed energy resources (IEC 61850-7-420)
- Hydro power (IEC 61850-7-410)

The long-term active participation of Schneider Electric experts in IEC and UCA working groups has resulted in a state-of-the-art Schneider Electric IEC 61850 offer with full IEC 61850-8-1 functionality.

IEC 61850 with M580 helps reduce customer investment and operational costs by easily connecting their power device to the process systems.

M580 IEC 61850 helps to improve system reliability and security by:

- Getting the right data at the right time to be able to act proactively, thus increasing the reliability and availability of both the process and the power system
- Implementing robust M580 cybersecurity features to help ensure secure communication

### Functionality

IEC 61850 MMS server, client, and GOOSE services can work in either Ed. 2.0 or Ed. 1.0 mode. M580 controllers support IEC 61850 standard engineering process and data objects. They also support the following data models:


- Substation automation systems (IEC 61850-7-4)
- Hydroelectric power plants (IEC 61850-7-410)
- Distributed energy resources (IEC 61850-7-420)

The **BMENOP0300** module from the Schneider Electric EcoStruxure platform is used to implement an engineering approach by enabling IEC 61850 compliant data exchange across industrial, energy, and power system applications. This offer helps our existing PLC customers from both process and energy applications to modernize smoothly and sustainably to the new IEC 61850 standard.


### Application cases

The **BMENOP0300** module can provide different services under different roles, primarily in the following three areas:

- 1** Electrical device integration
  - IEC 61850 Client is used to communication with IEDs.
  - GOOSE is also possible.
- 2** IEC 61850 based process control
  - Process control objects are modeled with IEC 61850 (hydro, DERs, etc.).
  - Server to SCADA and Client to IEDs is possible when needed.
- 3** M580 provides information to other systems.
  - IEC 61850 Server is used.

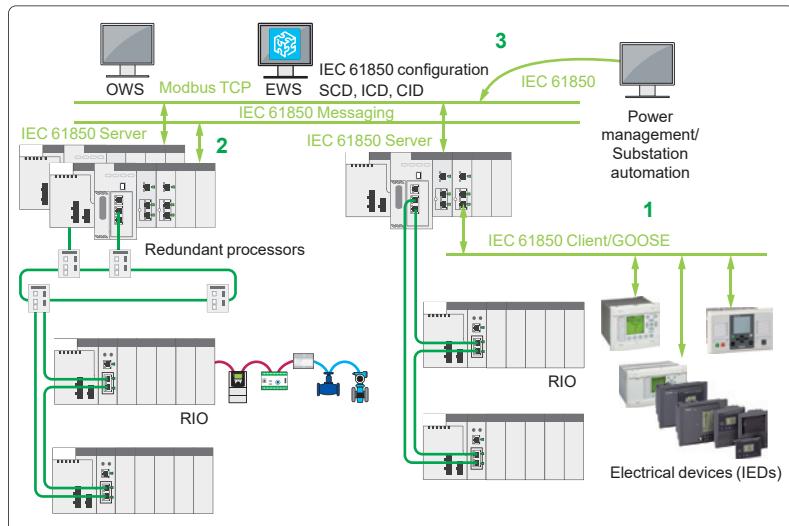

Different services that **BMENOP0300** can provide

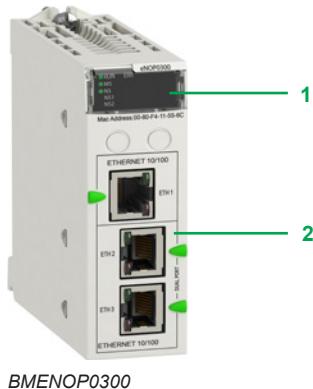

BMENOP0300

## Description

The **BMENOP0300** IEC 61850 module is installed on the local Ethernet backplane of an M580 system.

The 6 LEDs on the front panel **1** are used to diagnose operating conditions:

- RUN LED (green): Operating status
- ERR LED (red): Error detected
- MS LED (green/red): Module status
- NS LED (green/red): Network connection status
- NS1 LED (green/red): Ethernet network status
- NS2 LED (green/red): Ethernet network status

With three Ethernet ports **2** to link external intelligent electrical devices (IEDs), the module provides interfaces for IEC 61850 communication as well as device management software that utilizes the IEC 61850 standard **(1)**.

The maximum number of **BMENOP0300** modules that can be mounted on a local rack is determined by the M580 processor model:

|                                   |  |                          |  |
|-----------------------------------|--|--------------------------|--|
| Standalone processor model        | BMEP581020<br>BMEP582020<br>BMEP582040 | BMEP583020<br>BMEP583040 | BMEP584020<br>BMEP584040<br>BMEP585040<br>BMEP586040 |
| High-availability processor model | BMEH582040                             |                          | BMEH584040<br>BMEH586040                             |
| Maximum number                    | <b>2</b>                               | <b>3</b>                 | <b>4</b>   |

## Main features

The main features of the **BMENOP0300** module are as follows:

- Compatible with the entire range of M580 CPUs, in both standalone and redundant configuration:
- Ring topologies on 2 Ethernet ports using RSTP (Rapid Spanning Tree Protocol)
- Cybersecurity features:
- IEC 62443/ISA99 Achilles Level 2 certification
- IPSec for IP based communication
- IEC 61850 services:
- MMS messaging server and client
- GOOSE publisher and subscriber
- Network management using SNMP (Simple Network Management Protocol)
- Time synchronization: to be able to synchronize with external time servers and update the internal clock
- Modbus TCP support (limited, no I/O scanning)

## Capabilities

The capabilities per module are:

- 16 logical devices
- MMS server: 16 concurrent connections, 64 report control blocks instances, 8 instances for one report control block, 68 data sets, 256 data attributes/data set, URCB and BRCB reports
- Control model: DOes, SBOes, DOns, SBOns
- MMS client: 32 concurrent connections
- GOOSE: 4 control blocks for GOOSE publish and 32 control blocks for GOOSE subscribe, up to 256 inputs/data set

## References

| Description                         | Usage  | Reference         | Weight kg/lb    |
|-------------------------------------|--|-------------------|-----------------|
| M580 IEC 61850 communication module | IEC 61850 communication module used in M580 local rack Ethernet backplanes | BMENOP0300<br>(2) | 0.345/<br>0.761 |

*(1) Requires Unity Pro software V12.0 or later, see our website [www.schneider-electric.com](http://www.schneider-electric.com).*

*(2) For the "Conformal coating" version BMENOP0300C, see page 6/9.*

Technology approved  
by **Schneider**  
Electric



PMXNOW0300 Wi-Fi access point

## Modicon X80 I/O platform

### Wi-Fi network

#### PMXNOW0300 Wi-Fi access point

### Presentation

The PMXNOW0300 Wi-Fi access point consists of a WLAN wireless connection combined with a 3-port 10/100 Ethernet switch.

This module is designed to be integrated in the Modicon X80 I/O platform Modicon processor (1). It retrieves the 24 V voltage from the backplane rack and occupies one slot in it. An Ethernet cable, supplied with the module, must be used to connect the Wi-Fi module to the processor or the communication module (BMXNO\*\*\*\*\*).

This module offers the following functions:

- access point
- Ethernet bridge
- Wi-Fi repeater

The PMXNOW0300 is compatible with the majority of Ethernet-based protocols, including Modbus TCP, EtherNet/IP, etc.

It also allows Wi-Fi access to the associated Modicon processor from Vijeo Citect and Unity Pro software as well as exchange of data between automation platforms.

The PMXNOW0300 module can be removed and replaced while the rack is powered up. It is compatible with Vijeo Design' Air and Vijeo Design' Air Plus, allowing the HMI to be remotely located on a tablet or smartphone (2).

### Main characteristics

#### Type of device

Wi-Fi access point, client and repeater

#### Wi-Fi standards

IEEE 802.11 a/b/g/h

#### Operating frequencies

2.4 GHz and 5 GHz

#### IP rating

IP 30

#### Mounting

On the rack

#### Number of radios

1

#### Nominal data rate

≤108 Mbps (Super AG mode, 54 Mbps in standard mode)

#### Antenna connections

1 x RP-SMA

#### Ethernet connections

3 x 10/100 BASE TX, MDI-MDIX

#### Wi-Fi connections

1 x WLAN interface

#### Range

Up to 300 m/984.25 ft in free field with the antenna supplied as standard and up to 5 km/3.11 mi with external antenna (frequency range and data rate dependent on antenna type)

#### Dimensions

97 x 32 x 104 mm/3.82 x 1.26 x 4.09 in.

#### Storage temperature

- 40 °C to + 80 °C/- 40 °F to + 176 °F

#### Humidity

Max. 95% (non-condensing)

#### Supply voltage

+ 24 V ... from the Modicon X80 I/O platform rack

#### Consumption

3.5 W typical

(1) Only for processors compatible with the Modicon X80 I/O platform (see page 1/8).

(2) For more information, please consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

**References****Wi-Fi access points**

| Description  | Number of radios | Data rate  | IP rating | Reference      | Weight      |
|--|------------------|--|-----------|----------------|-------------|
|  |                  | Mbps   |           |                | kg/lb       |
| Wi-Fi 802.11a/b/g/h access point<br>with antenna and<br>50 cm/19.69 in. long<br>Ethernet cable<br>equipped with two RJ45<br>connectors, plus<br>CD-ROM | 1                | ≤108<br>(Super AG mode,<br>54 Mbps in standard mode) | IP 30     | PMXNOW0300 (1) | 0.205/0.452 |

Technology approved  
by  
**Schneider**  
Electric

(1) To order this product, please consult our Customer Care Centre.



---

## Treatment for severe environments

- Presentation ..... page 6/2
- Harsh chemical environments ..... page 6/2
- Extreme climatic environments ..... page 6/2

## Ruggedized power supply modules

- References ..... page 6/3

## Ruggedized racks and rack expansion module

- References ..... page 6/4

## Ruggedized discrete I/O modules

- References ..... page 6/6

## Ruggedized analog I/O modules

- References ..... page 6/7

## Ruggedized communication modules and network gateway

- References ..... page 6/9

## Ruggedized application-specific modules

- References ..... page 6/11

## Presentation

### Protective treatment of Modicon X80 I/O platform

The Modicon X80 I/O platform complies with "TC" (Treatment for all Climates) treatment requirements. It is designed as standard to operate in temperatures ranging from 0 to + 60 °C/32 to 140 °F.

For installations in industrial environments corresponding to "TH" (Treatment for Hot and humid environments), devices must be housed in enclosures providing at least IP 54 protection as specified by standard IEC/EN 60529, or an equivalent level of protection according to NEMA 250.

The Modicon X80 I/O platform offers **IP 20 degree of protection** (1). It can therefore be installed without an enclosure in reserved access areas that do not exceed **pollution level 2** (control room with no conductive dust). **Pollution level 2** does not take account of harsher environments, such as those where the air is polluted with conductive dust, fumes, corrosive or radioactive particles, vapors or salts, molds, insects, etc. All the safety hardware in-rack modules in red color (processor, coprocessor, X80 I/O) are conformal coated for a default use in severe environments.

### Treatment for severe environments

If the Modicon X80 I/O platform has to be used in more severe environments or is required to start and operate in an extended temperature range, from

**- 25 °C to + 70 °C/- 13 °F to 158 °F**, the "**ruggedized**" offer features industrially hardened processor and power supply modules, X-bus and Ethernet I/O modules and racks that have a protective coating on their circuit boards.

**Note:** Capable of starting within an extended temperature range (from - 25 °C to + 70 °C)

**- 13 °F to 158 °F**, a single-rack configuration is also able to operate at extremely low temperatures (as low as - 40 °C/- 40 °F) if placed in an appropriate enclosure. Please contact our Customer Care Center.

The coated/harsh offer provides the Safety CPU/Coprocessor and Safety I/O modules with "AVR 80" coating on their electronic cards. This treatment increases the isolation capability of the circuit boards and their resistance to:

- Condensation
- Dusty atmospheres (conducting foreign particles)
- Chemical corrosion, in particular during use in sulfurous atmospheres (oil refinery, purification plant, etc.) or atmospheres containing halogens (chlorine, etc.) or chemical vapors

This protection, combined with appropriate installation and maintenance, enables Modicon X80 I/O products to be used in the following environments:

#### ■ Harsh chemical environments (products with suffix 'H' and 'C'):

The use of contact grease protection on connectors, removal blocks is mandatory to meet these requirements. The lubricant protection seals electrical contacts from oxygen, moisture, aggressive gasses and other hostile elements.

- IEC/EN 60721-3-3 class 3C4:**
  - 7 days; 25 °C/77 °F relative humidity 75%
  - Concentrations (ppb): H<sub>2</sub>S: 9,900/SO<sub>2</sub>: 4,800/Cl<sub>2</sub>: 200
- ISA S71.04 classes G1 to Gx:**
  - 14 days; 25 °C/77 °F relative humidity 75%
  - Concentrations (ppb): H<sub>2</sub>S: 60/SO<sub>2</sub>: 350/Cl<sub>2</sub>: 1,450/NO<sub>2</sub>: 12
- IEC/EN 60068-2-52 salt mist, Kb test severity level 2:**
  - 3 x 24-hour cycles
  - 5% NaCl
  - 40 °C/104 °F relative humidity 93%

#### ■ Extreme climatic environments (products with suffix 'H' and 'T'):

- Temperatures ranging from -25 to +70 °C/-13 to 158 °F
- Relative humidity levels up to 93% from -25 °C/-13 °F to +60 °C/140 °F
- Formation of ice
- Altitudes from 0 to 5,000 m/0 to 16,404 ft

### Specific characteristics for Safety modules

All the Safety modules are coated and only exist with this surface treatment. There is no T, C, H extension in part numbers. Safety modules are compatible for:

- temperature range from -25...+60 °C/-13...140 °F
- corrosive environment using common H components

For corrosive environment, additional protecting gel need to cover all electrical connection of M580 harsh products.

This 25 g gel tube can be ordered separately under reference **BMXGEL0025**.

(1) Each slot in a **BM•XBP••00** rack is equipped as standard with a protective cover that should only be removed when inserting a module. If any covers are subsequently misplaced, replacements can be ordered under reference **BMXXEM010** (sold in lots of 5).





BMXCP3020H



BMXCP3500H



BMXCP34002H



BMXCP34022H



BMXCP3522H

## Composition

### References and characteristics

To order ruggedized modules and racks, see the reference pages 6/3 to 6/11 (the references of the ruggedized products available include the suffix "H" and the conformal coated products available include the suffix "C"). The standard separate parts (cordsets, cables, sub-bases, etc.) that are compatible with the ruggedized modules offer are listed in the reference pages (see pages 6/3 to 6/11).

The majority of operating and electrical characteristics of ruggedized modules are identical to those of their equivalent standard versions. However, some characteristics are subject to either derating or limitation. Please consult our website [www.schneider-electric.com](http://www.schneider-electric.com).

### Ruggedized power supply modules

Each **BM<sub>n</sub>XBP<sub>m</sub>00H** rack must be equipped with a power supply module. **BM<sub>n</sub>XBP<sub>m</sub>02H** must be equipped with 1 or 2 redundant power supply modules. These modules are inserted in the leftmost power supply slots of each rack (marked CPS).

The available power values given below in ***bold italic*** correspond to operation at -25 °C/-13 °F and +70 °C/+158 °F (see temperature derating curves on our website [www.schneider-electric.com](http://www.schneider-electric.com)).

The power required to supply each rack depends on the type and number of modules installed in the rack. It is therefore necessary to draw up a power consumption table for each rack in order to determine which is the most appropriate **BM<sub>n</sub>CPS<sub>m</sub>00H** power supply module for your requirements (consult our website [www.schneider-electric.com](http://www.schneider-electric.com)).

### Power supply modules (1)

| Line supply                        | Available power (2)       |                               |                                  |                       | Reference  | Weight kg/lb    |
|------------------------------------|---------------------------|-------------------------------|----------------------------------|-----------------------|------------|-----------------|
|                                    | 3.3 V $\text{---}$<br>(3) | 24 V $\text{---}$ rack<br>(3) | 24 V $\text{---}$ sensors<br>(4) | Total                 |            |                 |
| 24...48 V $\text{---}$<br>isolated | 15 W<br><b>11.3 W</b>     | 32 W<br><b>23.4 W</b>         | —                                | 32 W<br><b>23.4 W</b> | BMXCP3020H | 0.340/<br>0.750 |
| 100...240 V $\text{---}$           | 15 W<br><b>11.3 W</b>     | 31.2 W<br><b>23.4 W</b>       | 21.6 W<br><b>16.2 W</b>          | 36 W<br><b>27 W</b>   | BMXCP3500H | 0.360/<br>0.794 |
|                                    | 18 W<br><b>18 W</b>       | 40 W<br><b>40 W</b>           | —                                | 40 W<br><b>40 W</b>   | BMXCP4002H | 0.360/<br>0.794 |
| 24...48 V $\text{---}$             | 18 W<br><b>18 W</b>       | 40 W<br><b>40 W</b>           | —                                | 40 W<br><b>40 W</b>   | BMXCP4022H | 0.810/<br>1.786 |
| 125 V $\text{---}$                 | 18 W<br><b>18 W</b>       | 40 W<br><b>40 W</b>           | —                                | 40 W<br><b>40 W</b>   | BMXCP3522H | 0.610/<br>1.345 |

### Standard separate part

| Description                   | Type        | Composition   | Reference   | Weight kg/lb    |
|-------------------------------|-------------|---|-------------|-----------------|
| Set of 2 removable connectors | Spring-type | One 5-way terminal block and one 2-way terminal block | BMXXTSCPS20 | 0.015/<br>0.033 |

### Standard replacement part

| Description                   | Type  | Composition   | Reference   | Weight kg/lb    |
|-------------------------------|-------|---|-------------|-----------------|
| Set of 2 removable connectors | Caged | One 5-way terminal block and one 2-way terminal block | BMXXTSCPS10 | 0.020/<br>0.044 |

(1) Includes a set of 2 removable connectors **BMXXTSCPS10**.

(2) The total power consumed on each voltage (3.3 V  $\text{---}$  and 24 V  $\text{---}$ ) must not exceed the total power of the module. See the power consumption table on our website [www.schneider-electric.com](http://www.schneider-electric.com).


(3) 3.3 V  $\text{---}$  and 24 V  $\text{---}$  rack voltages for powering Modicon M340 and M580 PLC modules.

(4) 24 V  $\text{---}$  sensor voltage for powering the input sensors (voltage available via the 2-way removable connector on the front panel).


# Modicon X80 I/O platform

## Dedicated parts for severe environments

### Ruggedized racks and rack expansion module



BMXXBP0400H



BMEXBP0800H



BMXXBE1000H



BMXXSP0●00 + BMXXSP30●0

6

#### Ruggedized racks

| Description   | Type of module to be inserted  | No. of slots<br>(1) | Power consumption<br>(2) | Reference   | Weight<br>kg/lb |
|---|--|---------------------|--------------------------|-------------|-----------------|
| Ruggedized X-bus racks                              | BMXCPS power supply, BMXP34 or BMEP58 processor, BMEH58 processor, I/O modules, and application-specific (counter and communication) modules     | 4                   | 1 W                      | BMXXBP0400H | 0.630/<br>1.389 |
|   |  | 6                   | 1.5 W                    | BMXXBP0600H | 0.790/<br>1.742 |
|   |  | 8                   | 2 W                      | BMXXBP0800H | 0.950/<br>2.094 |
|   |  | 12                  | 0.74 W                   | BMXXBP1200H | 1.270/<br>2.800 |
| Ruggedized Ethernet + X-bus racks                   | BMXCPS power supply, BMEP58 processor, BMEH58 processor, I/O modules, and application-specific (counter and communication) modules               | 4                   | 2.8 W                    | BMEXBP0400H | 0.715/<br>1.576 |
|   |  | 8                   | 3.9 W                    | BMEXBP0800H | 1.070/<br>2.359 |
|   |  | 12                  | 3.9 W                    | BMEXBP1200H | 1.387/<br>3.058 |
| Ruggedized Ethernet + X-bus dual power supply racks | BMEP58 processor, BMEH58 processor, BMXCPS400* redundant power supply, I/O modules, and application-specific (counter and communication) modules | 6                   | 3.9 W                    | BMEXBP0602H | 1.387/<br>3.058 |
|   |  | 10                  | 3.9 W                    | BMEXBP1002H | 1.387/<br>3.058 |

| Description                          | Use  | Reference   | Weight<br>kg/lb |
|--------------------------------------|--|-------------|-----------------|
| Ruggedized rack expansion module (3) | Standard module to be installed in each rack ( <b>XBE</b> slot)<br>Used to daisy chain up to 4 racks | BMXXBE1000H | 0.178/<br>0.392 |

#### Standard accessories for racks

| Description   | For use with  | Sold in lots of | Reference  | Weight<br>kg/lb |
|---|---|-----------------|------------|-----------------|
| Shielding connection kits comprising:<br>- 1 metal bar<br>- 2 support bases | BM●XBP0400H rack  | —               | BMXXSP0400 | 0.280/<br>0.617 |
|   | BMXXBP0600H rack  | —               | BMXXSP0600 | 0.310/<br>0.683 |
|   | BM●XBP0800H rack<br>BMEXBP0602H rack                      | —               | BMXXSP0800 | 0.340/<br>0.750 |
|   | BM●XBP1200H rack<br>BMEXBP1002H rack                      | —               | BMXXSP1200 | 0.400/<br>0.882 |
| Spring clamping rings   | Cables, cross-section 1.5...6 mm <sup>2</sup> /AWG 16...9 | 10              | STBXSP3010 | 0.050/<br>0.110 |
|   | Cables, cross-section 5...11 mm <sup>2</sup> /AWG 10...7  | 10              | STBXSP3020 | 0.070/<br>0.154 |
| Protective covers (replacement parts)                                       | Unoccupied slots on BM●XBP●●00H rack                      | 5               | BMXXEM010  | 0.005/<br>0.011 |
| Contact protection grease 25 g  | Purchase one unit each 24 slots of racks                  | 1               | BMXGEL0025 | —               |

(1) Number of slots taking the processor module, I/O modules, and application-specific modules (excluding power supply module).

(2) Power consumption of anti-condensation resistor(s).

(3) Module and cordsets do not operate properly at temperatures lower than -25 °C/-13 °F.



Angled connector on extension cordsets

## Standard cordsets and connection accessories

| Description  | Use   | Composition                            | Type of connector | Length           | Reference         | Weight kg/lb   |
|--|---|--|-------------------|------------------|-------------------|----------------|
| <b>X-bus extension cordsets</b><br>total length 30 m/ 98 ft max. (1) | Between 2 BMXXBE1000H rack expansion modules            | 2 x 9-way SUB-D connectors             | Angled            | 0.8 m/ 2.63 ft   | <b>BMXXBC008K</b> | 0.165/ 0.364   |
|  |   |  |                   | 1.5 m/ 4.92 ft   | <b>BMXXBC015K</b> | 0.250/ 0.551   |
|  |   |  |                   | 3 m/ 9.84 ft     | <b>BMXXBC030K</b> | 0.420/ 0.926   |
|  |   |  |                   | 5 m/ 16.40 ft    | <b>BMXXBC050K</b> | 0.650/ 1.433   |
|  |   |  |                   | 12 m/ 39.37 ft   | <b>BMXXBC120K</b> | 1.440/ 3.175   |
|  |   |  | Straight          | 1 m/ 3.28 ft     | <b>TSXCBY010K</b> | 0.160/ 0.353   |
|  |   |  |                   | 3 m/ 9.84 ft     | <b>TSXCBY030K</b> | 0.260/ 0.573   |
|  |   |  |                   | 5 m/ 16.40 ft    | <b>TSXCBY050K</b> | 0.360/ 0.794   |
|  |   |  |                   | 12 m/ 39.37 ft   | <b>TSXCBY120K</b> | 1.260/ 2.778   |
|  |   |  |                   | 18 m/ 59.06 ft   | <b>TSXCBY180K</b> | 1.860/ 4.101   |
| <b>Cable reel (1)</b>  | Length of cable to be equipped with TSXCBYK9 connectors | Ends with flying leads, 2 line testers |                   | 100 m/ 328.08 ft | <b>TSXCBY1000</b> | 12.320/ 27.161 |



TSXTLYEX

| Description                      | Use   | Composition                                 | Sold in lots of | Reference          | Weight kg/lb |
|----------------------------------|---|---|-----------------|--------------------|--------------|
| <b>Line terminator</b>           | Required on both BMXXBP●●●0H modules at each end of the daisy chain | 2 x 9-way SUB-D connectors marked A/ and /B | 2               | <b>TSXTLYEX</b>    | 0.050/ 0.110 |
| <b>X-bus straight connectors</b> | For ends of TSXCBY1000 cables                                       | 2 x 9-way SUB-D straight connectors         | 2               | <b>TSXCBYK9</b>    | 0.080/ 0.176 |
| <b>Connector assembly kit</b>    | For attaching TSXCBYK9 connectors                                   | 2 crimping pliers, 1 pen (3)                | —               | <b>TSXCBYACC10</b> | —            |

(1) Module and cordsets do not operate properly at temperatures lower than -25 °C/-13 °F.

(2) Cable supplied with a set of 2 TSXTVSY100 electrical transient suppressors.

(3) To attach the connectors to the cable, you also need a wire stripper, a pair of scissors, and a digital ohmmeter.

# Modicon X80 I/O platform

## Dedicated parts for severe environments

### Ruggedized discrete I/O modules



BMXDDI1602H

#### References

##### Ruggedized discrete input modules

| Type of current | Input voltage         | Connection via (1)                                   | IEC/EN 61131-2 conformity | No. of channels (common)    | Reference   | Weight kg/lb |
|-----------------|-----------------------|--|---------------------------|-----------------------------|-------------|--------------|
| ---             | 24 V (positive logic) | Screw or spring-type 20-way removable terminal block | Type 3                    | 16 isolated inputs (1 x 16) | BMXDDI1602H | 0.115/0.254  |
|                 | 24 V (negative logic) | Screw or spring-type 20-way removable terminal block | Non-IEC                   | 16 isolated inputs (1 x 16) | BMXDAI1602H | 0.115/0.254  |
|                 | 48 V (positive logic) | Screw or spring-type 20-way removable terminal block | Type 1                    | 16 isolated inputs (1 x 16) | BMXDDI1603H | 0.115/0.254  |
| ~               | 24 V                  | Screw or spring-type 20-way removable terminal block | Type 1                    | 16 isolated inputs (1 x 16) | BMXDAI1602H | 0.115/0.254  |
|                 | 48 V                  | Screw or spring-type 20-way removable terminal block | Type 3                    | 16 isolated inputs (1 x 16) | BMXDAI1603H | 0.115/0.254  |
|                 | 100...120 V           | Screw or spring-type 20-way removable terminal block | Type 3                    | 16 isolated inputs (1 x 16) | BMXDAI1604H | 0.115/0.254  |
|                 |                       | Caged or spring-type 40-way removable terminal block | Type 1                    | 16 isolated inputs (1 x 16) | BMXDAI1614H | 0.150/0.331  |
|                 | 200...240 V           | Caged or spring-type 40-way removable terminal block | Type 1                    | 16 isolated inputs (1 x 16) | BMXDAI1615H | 0.156/0.344  |



BMXDDO1602H

BMXDRA0815H/  
0805H/1605H

##### Ruggedized discrete output modules


| Type of current | Output voltage                           | Connection via (1)  | IEC/EN 61131-2 conformity | No. of channels (common)                                | Reference   | Weight kg/lb |
|-----------------|--|---|---------------------------|---|-------------|--------------|
| ---             | 24 V/0.5 A (positive logic)              | Screw or spring-type 20-way removable terminal block        | Yes                       | 16 protected outputs (1 x 16)                           | BMXDDO1602H | 0.120/0.265  |
|                 | 24 V/0.5 A (negative logic)              | Screw or spring-type 20-way removable terminal block        | Yes                       | 16 protected outputs (1 x 16)                           | BMXDDO1612H | 0.120/0.265  |
| ~ triac         | 100...240 V                              | Screw or spring-type 20-way removable terminal block        | Yes                       | 16 outputs (4 x 4)                                      | BMXDAO1605H | 0.140/0.309  |
|                 | 24...240 V                               | Caged, screw or spring-type 40-way removable terminal block | Yes                       | 16 isolated outputs                                     | BMXDAO1615H | 0.250/0.551  |
| --- or ~ relay  | 12...24 V ---/2 A                        | Screw or spring-type 20-way removable terminal block        | Yes                       | 8 non-protected outputs (without common)                | BMXDRA0805H | 0.145/0.320  |
|                 | 24...240 V ~/2 A                         | Screw or spring-type 20-way removable terminal block        | Yes                       | 8 normally open isolated relay outputs                  | BMXDRA0815H | 0.210/0.463  |
|                 | 24...125 V ---/0.3 A                     | Screw or spring-type 20-way removable terminal block        | Yes                       | 16 non-protected outputs                                | BMXDRA1605H | 0.150/0.331  |
|                 | 24 V ---/2 A,<br>240 V ~/2 A             | Screw or spring-type 20-way removable terminal block        | Yes                       | (2 x 8)   | BMXDRC0805H | 0.189/0.417  |
|                 | 24...240 V ~/2 A<br>24...125 V ---/0.3 A | Caged or spring-type 40-way removable terminal block        | Yes                       | 8 normally open/ normally closed isolated relay outputs |             |              |



BMXDDM1602H

##### Ruggedized mixed discrete I/O modules

| Number of I/O | Connection via (1)                                   | No. of input channels (common) | No. of output channels (common)           | IEC/EN 61131-2 conformity | Reference    | Weight kg/lb |
|---------------|--|--------------------------------|---|---------------------------|--------------|--------------|
| 16            | Screw or spring-type 20-way removable terminal block | 8 (positive logic) (1 x 8)     | 8, transistor 24 V ---/0.5 A (1 x 8)      | Inputs, type 3            | BMXDDM16022H | 0.115/0.254  |
|               |  |                                | 8, 24 V --- or 24...240 V ~ relay (1 x 8) | Inputs, type 3            | BMXDDM16025H | 0.135/0.298  |



BMXFTB2000

##### Standard removable connection blocks

| Description  | Use  | Type        | Reference   | Weight kg/lb |
|--|--|-------------|-------------|--------------|
| 20-way removable terminal blocks                     | For module with 20-way removable terminal block                          | Caged       | BMXFTB2000  | 0.093/0.205  |
|  |  | Screw clamp | BMXFTB2010  | 0.075/0.165  |
|  |  | Spring-type | BMXFTB2020  | 0.060/0.132  |
| 40-way removable terminal blocks (with gold plating) | For hardened version of module only with 40-way removable terminal block | Caged       | BMXFTB4000H | 0.166/0.366  |
|  |  | Spring      | BMXFTB4020H | 0.098/0.216  |

##### Standard preformed cordsets for I/O modules with removable terminal block

| Description  | Composition   | Length        | Reference  | Weight kg/lb |
|--|---|---------------|------------|--------------|
| Preassembled cordsets with one end with flying leads | One 20-way spring-type removable terminal block (BMXFTB2020)<br>One end with color-coded flying leads | 3 m/9.84 ft   | BMXFTW301  | 0.850/1.874  |
|  |   | 5 m/16.40 ft  | BMXFTW501  | 1.400/3.086  |
|  |   | 10 m/32.80 ft | BMXFTW1001 | 2.780/6.129  |
|  |   |               |            |              |

(1) By connector, module supplied with cover(s)



BMXAMI0410H



BMXART0414H



BMXFTB20•0

## References

### Ruggedized analog input modules

| Type of inputs                    | Input signal range   | Resolution     | Connection  | No. of channels                | Reference          | Weight kg/lb    |
|-----------------------------------|--|----------------|---|--------------------------------|--------------------|-----------------|
| <b>Isolated high-level inputs</b> | $\pm 10\text{ V}, 0\ldots 10\text{ V}, 0\ldots 5\text{ V}, 1\ldots 5\text{ V}, \pm 5\text{ V}$<br>$0\ldots 20\text{ mA}, 4\ldots 20\text{ mA}, \pm 20\text{ mA}$ | 16 bits        | Via caged, screw clamp, or spring-type removable terminal block | 4 high-speed channels          | <b>BMXAMI0410H</b> | 0.143/<br>0.315 |
|                                   |  |                | Via caged or spring-type removable terminal block               | 8 isolated high-speed channels | <b>BMXAMI0810H</b> | 0.175/<br>0.386 |
| <b>Isolated low-level inputs</b>  | Temperature probe, thermocouple<br>$\pm 40\text{ mV}, \pm 80\text{ mV}, \pm 160\text{ mV}, \pm 320\text{ mV}, \pm 640\text{ mV}, \pm 1.28\text{ V}$              | 15 bits + sign | 40-way connector  | 4 channels                     | <b>BMXART0414H</b> | 0.135/<br>0.298 |
|                                   |  |                |   | 8 channels                     | <b>BMXART0814H</b> | 0.165/<br>0.364 |

### Ruggedized analog output module

| Type of outputs                    | Output signal range   | Resolution | Connection  | No. of channels | Reference          | Weight kg/lb    |
|------------------------------------|---|------------|---|-----------------|--------------------|-----------------|
| <b>Isolated high-level outputs</b> | $\pm 10\text{ V}, 0\ldots 20\text{ mA}, 4\ldots 20\text{ mA}$ | 16 bits    | Via caged, screw clamp, or spring-type removable terminal block | 2 channels      | <b>BMXAMO0210H</b> | 0.144/<br>0.317 |
|                                    |   |            |   | 4 channels      | <b>BMXAMO0410H</b> | 0.175/<br>0.386 |

### Ruggedized mixed analog I/O module

| Type of outputs                | Signal range   | Resolution                                | Connection  | No. of channels                | Reference          | Weight kg/lb    |
|--------------------------------|--|---|---|--------------------------------|--------------------|-----------------|
| <b>Mixed I/O, non-isolated</b> | $\pm 10\text{ V}, 0\ldots 10\text{ V}, 0\ldots 5\text{ V}, 1\ldots 5\text{ V}, 0\ldots 20\text{ mA}, 4\ldots 20\text{ mA}$ | 14 bits or 12 bits depending on the range | Via caged, screw clamp, or spring-type removable terminal block | I: 4 channels<br>Q: 2 channels | <b>BMXAMM0600H</b> | 0.155/<br>0.342 |



BMXF7TW●01S



ABE7CPA41●



BMXFCA●●0



BMXFCA●●2

#### References

##### Standard connection accessories for analog modules (1)

| Description                      | For use with modules                      | Type, composition   | Length  | Reference                           | Weight kg/lb                       |
|----------------------------------|---|---|---|-------------------------------------|------------------------------------|
| 20-way removable terminal blocks | BMXAMI0410H<br>BMXAMO0210H<br>BMXAMM0600H | Caged   | –   | BMXF7B2000                          | 0.093/<br>0.205                    |
|                                  |   | Screw clamp   | –   | BMXF7B2010                          | 0.075/<br>0.165                    |
|                                  |   | Spring  | –   | BMXF7B2020                          | 0.060/<br>0.132                    |
| Preassembled cordsets            | BMXAMI0410H<br>BMXAMO0210H<br>BMXAMM0600H | One 20-way removable terminal block (BMXF7B2020)<br>One end with color-coded flying leads | 3 m/<br>9.84 ft<br>5 m/<br>16.40 ft                           | BMXF7W301S<br>BMXF7W501S            | 0.470/<br>1.036<br>0.700/<br>1.543 |
|                                  |   | BMXART0414H<br>BMXART0814H (2)  | One 40-way connector<br>One end with color-coded flying leads | 3 m/<br>9.84 ft<br>5 m/<br>16.40 ft | BMXF7W301S<br>BMXF7W501S           |

##### Modicon Telefast ABE7 pre-wired system

|                                 |                            |   |   |            |                 |
|---------------------------------|----------------------------|---|---|------------|-----------------|
| Modicon Telefast ABE7 sub-bases | BMXAMI0410H                | Distribution of isolated power supplies<br>Delivers 4 protected isolated power supplies for 4...20 mA inputs<br>Direct connection of 4 inputs | – | ABE7CPA410 | 0.180/<br>0.397 |
|                                 | BMXART0414H<br>BMXART0814H | Connection and provision of cold-junction compensation for thermocouples<br>Direct connection of 4 inputs                                     | – | ABE7CPA412 | 0.180/<br>0.397 |

|  |                            |  |  |                                     |   |
|--|----------------------------|--|--|-------------------------------------|---|
| Preformed cordsets for Modicon Telefast ABE7CPA41● | BMXAMI0410H<br>BMXAMO0210H | One 20-way removable terminal block and one 25-way SUB-D connector for ABE7CPA410/CPA21 sub-base | 1.5 m/<br>4.92 ft<br>3 m/<br>9.84 ft<br>5 m/<br>16.40 ft | BMXFCA150<br>BMXFCA300<br>BMXFCA500 | 0.320/<br>0.705<br>0.500/<br>1.102<br>0.730/<br>1.609 |
|  | BMXART0414H<br>BMXART0814H | One 40-way connector and one 25-way SUB-D connector for ABE7CPA412 sub-base                      | 1.5 m/<br>4.92 ft<br>3 m/<br>9.84 ft<br>5 m/<br>16.40 ft | BMXFCA152<br>BMXFCA302<br>BMXFCA502 | 0.330/<br>0.728<br>0.510/<br>1.124<br>0.740/<br>1.631 |

(1) The shielding on the cordsets carrying the analog signals must always be connected to the BMXXSP●●0 shielding connection kit mounted under the rack holding the analog modules (see page 2/3).

(2) The BMXART0814H 8-channel module requires two ABE7CPA412 sub-bases and two BMXFCA●●2 cordsets.

# Modicon X80 I/O platform

## Dedicated parts for severe environments

### Ruggedized communication modules



BMXNOE0100H/0110H

#### Communication

##### BMXNOE0100H/0110H ruggedized Ethernet communication modules

| Description                         | Data rate   | Transparent Ready class | Reference   | Weight kg/lb |
|-------------------------------------|-------------|-------------------------|-------------|--------------|
| Ethernet Modbus/TCP network modules | 10/100 Mbps | B30                     | BMXNOE0100H | 0.200/0.441  |
|                                     |             | C30                     | BMXNOE0110H | 0.200/0.441  |



BMXNOM0200H

##### BMXNOM0200H ruggedized serial link module

| Description                     | Protocol   | Physical layer  | Reference   | Weight kg/lb |
|---------------------------------|--|---|-------------|--------------|
| Serial link module (2-channels) | Modbus master/slave<br>RTU/ASCII,<br>Character mode,<br>GSM/GPRS modem | 1 non-isolated RS 232 channel<br>(SL0)<br>2 isolated RS 485 channels<br>(SL0 and SL1) | BMXNOM0200H | 0.230/0.507  |



BMXNOR0200H

##### BMXNOR0200H ruggedized RTU communication module

| Description              | Protocols   | Physical layer                             | Reference   | Weight kg/lb |
|--------------------------|---|--|-------------|--------------|
| RTU communication module | Modbus TCP,<br>IEC 60870-5-104,<br>or DNP3 IP<br>(client or server) | 1 Ethernet port<br>10BASE-T/<br>100BASE-TX | BMXNOR0200H | 0.205/0.452  |
|                          | IEC 60870-5-101<br>or DNP3 serial<br>(master or slave)              | 1 non-isolated RS 232/485 serial link port |             |              |



BMECXM0100H

##### BMECXM0100H ruggedized communication module

| Description                  | Protocols  | Physical layer                    | Reference   | Weight kg/lb |
|------------------------------|--|-----------------------------------|-------------|--------------|
| CANopen communication module | CiA 301 V4.2 standard (master or slave); Ethernet/IP | ISO 11898 (9-way SUB-D connector) | BMECXM0100H | 0.200/0.441  |

## References (continued)

# Modicon X80 I/O platform

Dedicated parts for severe environments  
Ruggedized communication modules and network gateway



BMECRA31210



BMXCRA31210



BMENOC0321C



BMENOS0300C



BMENOP0300C



TCSE GPA23F14FK

### Communication

#### “Conformal Coating” EIO drop adapters

| Description   | SERVICE port | Reference    | Weight kg/lb |
|---|--------------|--------------|--------------|
| Modicon X80 EIO drop adapter for Ethernet + X-bus racks | 1            | BMECRA31210C | —            |
| Modicon X80 EIO performance drop adapter                | 1            | BMXCRA31210C | —            |

#### “Conformal Coating” Ethernet network option switch

| Description                            | SERVICE port | Device network port (Ethernet) | Reference   | Weight kg/lb |
|--|--------------|--------------------------------|-------------|--------------|
| EtherNet/IP, Modbus/TCP network module | 1            | 2                              | BMENOC0301C | 0.345/ 0.761 |
| FactoryCast network module             | 1            | 2                              | BMENOC0311C | 0.345/ 0.761 |
| NOC control network module             | 1            | 2                              | BMENOC0321C | 0.345/ 0.761 |

#### “Conformal Coating” Ethernet network option switch

| Description                    | SERVICE port | Device network port (Ethernet) | Reference   | Weight kg/lb |
|--------------------------------|--------------|--------------------------------|-------------|--------------|
| Ethernet network option switch | 1            | 2                              | BMENOS0300C | —            |

#### “Conformal Coating” IEC 61850 communication module

| Description                    | Protocols          | Physical layer       | Reference   | Weight kg/lb |
|--------------------------------|--------------------|----------------------|-------------|--------------|
| IEC 61850 communication module | IEC 61850 standard | 10BASE-T/ 100BASE-TX | BMENOP0300C | 0.345/ 0.761 |

#### Ruggedized Profibus DP network gateway

| Description                         | Protocols  | Physical layer                                  | Reference       | Weight kg/lb |
|-------------------------------------|------------|---|-----------------|--------------|
| Profibus Remote Master (PRM) module | Modbus TCP | 1 Ethernet switch, 2 ports 10BASE-T/ 100BASE-TX | TCSE GPA23F14FK | —            |
|                                     |            | Profibus DP V1 and Profibus PA (via gateway)    |                 |              |
|                                     |            | 1 isolated RS 485 Profibus DP port              |                 |              |

#### Standard connection accessory

| Designation                            | Description  | RS 232 interface   | Reference                      | Weight kg/lb                 |
|--|--|--|--------------------------------|------------------------------|
| Cordset for DCE terminal (modem, etc.) | Equipped with 1 x RJ45 connector and 1 x 9-way male SUB-D connector Length 3 m/9.84 ft | Simplified 4-wire (RX, TX, RTS, and CTS)<br>Full 8-wire (except RI signal) | TCSMCN3M4M3S2<br>TCSXCN3M4F3S4 | 0.150/ 0.331<br>0.165/ 0.364 |

# Modicon X80 I/O platform

Dedicated parts for severe environments  
Ruggedized application-specific modules



BMXEHC0200H




BMXEHC0800H




BMXETM0200H



BMXEAEO300H



BMXFTB20•0



BMXFTB28•0

## Application-specific modules

### BMXEHC0200H/0800H ruggedized counter modules

| Description  | No. of channels | Characteristics | Reference   | Weight kg/lb   |
|--|-----------------|-----------------|-------------|----------------|
| Counter modules for 24 V DC 2- and 3-wire sensors and 10/30 V DC incremental encoders with push-pull outputs | 2               | 60 kHz counting | BMXEHC0200H | 0.112<br>0.247 |
|  | 8               | 10 kHz counting | BMXEHC0800H | 0.113<br>0.249 |

### BMXETM0200H ruggedized frequency input module

| Description   | No. of channels | Characteristics                                   | Reference   | Weight kg/lb    |
|---|-----------------|---|-------------|-----------------|
| Speed and frequency control module for turbomachinery application | 2               | Input frequency: 0...500Hz, reflex digital output | BMXETM0200H | 0.124/<br>0.273 |

### BMXEAEO300H ruggedized SSI encoder interface module

| Description                  | No. of channels | Characteristics   | Reference   | Weight kg/lb    |
|------------------------------|-----------------|---|-------------|-----------------|
| SSI encoder interface module | 3               | 8 to 31 bits data width<br>4 baud rates:<br>100 kHz, 200 kHz,<br>500 kHz, 1 MHz | BMXEAEO300H | 0.138/<br>0.304 |

## Standard connection accessories (1)

| Description   | Composition   | Unit reference | Weight kg/lb    |
|---|---|----------------|-----------------|
| Connector kit for BMXEHC0200H module                                    | Two 16-way connectors and one 10-way connector                  | BMXXTSCHSC20   | 0.021/<br>0.046 |
| 20-way removable terminal blocks for BMXEHC0800H module                 | Caged   | BMXFTB2000     | 0.093/<br>0.205 |
|   | Screw clamp   | BMXFTB2010     | 0.075/<br>0.165 |
|   | Spring  | BMXFTB2020     | 0.060/<br>0.132 |
| 28-way removable terminal blocks for BMXEAEO300H module                 | Caged   | BMXFTB2800     | 0.111/<br>0.245 |
|   | Spring  | BMXFTB2820     | 0.080/<br>0.176 |
| Shielding connection kits for BMXEHC0200H/0800H and BMXEAEO300H modules | Comprising a metal bar and 2 support bases for mounting on rack | See page 2/3   | –               |

(1) The shielding on the cordsets carrying the counter signals must always be connected to the BMXXSP••00 shielding connection kit mounted under the rack holding the BMXEHC0200H module (see page 2/3).



### Compatibility with sensors

- OsiSense XU photo-electric sensors ..... page 7/2
- OsiSense XS inductive proximity sensors ..... page 7/4

# Modicon X80 I/O platform

## Inputs and OsiSense XU photo-electric sensors

| Photo-electric sensors |                 | Reference   | ... inputs, BMXDDI   |      |       |       |       | ... inputs, BMXDDM |       |       | ... inputs, BMXAMI |      | ~ inputs, BMXDAI |      |      |      |      |  |
|------------------------|-----------------|---|--|------|-------|-------|-------|--------------------|-------|-------|--------------------|------|------------------|------|------|------|------|--|
| Type                   | General purpose |   | 1602   | 1603 | 1604T | 3202K | 6402K | 16022              | 16025 | 3202K | 0810               | 0800 | 1602             | 1603 | 1604 | 0805 | 0814 |  |
| Design Ø 18            | Metal           | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUB0/1/2/4/5/9B•P•••<br>XUB0/1/2/4/5/9B•N•••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Plastic         | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUB0/1/2/4/5/9A•P•••<br>XUB0/1/2/4/5/9A•N•••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
| Design                 | Miniature       | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUM0/2/5/9AP•••••<br>XUM0/2/5/9AN•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact 50x50   | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUK1/2/5/8/9AP•••<br>XUK1/2/5/8/9AN•••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        |                 | 3 wire, programmable PNP/NPN DC<br>5 wire, programmable AC/DC   | XUK0AK•••<br>XUK0/1/2/5/8/9AR  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact 92x71   | 3 wire, programmable PNP/NPN DC<br>5 wire, programmable AC DC   | XUX0/1/2/5/8/9AK<br>XUX0/1/2/5/8/9AR   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
| Application            | Optical fork    |   |  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
| Material handling      | Optical fork    | 3 wire, PNP 24V<br>3 wire, NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V<br>4 wire, PNP or NPN 24V<br>4 wire, PNP, or NPN 24V<br>4 wire, PNP, or NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V<br>4 wire, PNP, or NPN 24V | XUVR•••••P••<br>XUVR•••••N••<br>XUVA•••••P••<br>XUVA•••••N••<br>XUYF•••••••<br>XUVU06•••••<br>XUVK•••••<br>XUVH•••••<br>XUVJ•••••<br>XUVF••••• |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
| Packaging              | Fiber           | 4 wire, PNP, or NPN 24V   | XUYDCF•••••  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact         | 4 wire, PNP, or NPN 24V   | XUK•S•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 18, threaded  | 3 wire, PNP 24V   | XU5M18U1D  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Fiber           | 4 wire, PNP, or NPN 24V   | XUYAFL•••••  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 18, threaded  | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUBT•P•••••<br>XUBT•N•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact         | 4 wire, PNP, or NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V<br>4 wire, PNP, or NPN 24V  | XUKT•••••<br>XUKC1N•••••<br>XUKC1P•••••<br>XURC3P•••••<br>XURC3N•••••<br>XUMW•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 18, threaded  | 3 wire, PNP 24V<br>3 wire, NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V  | XUB0SP•••••<br>XUB0SN•••••<br>XU•N18P•••••<br>XU•N18N•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 8, threaded   | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUAH•••••<br>XUAJ•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Miniature       | 3 wire, PNP 24V<br>3 wire, NPN 24V<br>3 wire, PNP 24V<br>3 wire, NPN 24V<br>3 wire, PNP 24V   | XUYP•••••P••<br>XUYP•••••N••<br>XUM2/5/9BP•••••<br>XUM2/5/9BN•••••<br>XUY•••••929•••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
| Hoisting               | M 18, threaded  | 3 wire, PNP 24V<br>3 wire, NPN 24V  | XUBLB•P•••••<br>XUBLB•N•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact         | 2 wire 4...20 mA; 3 wire 0...10V  | XUJK803538   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 18, threaded  | 2 wire 4...20 mA<br>PNP, 2 wire 4...20 mA   | XU5M18AB20D<br>XU2M18AB20D   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Compact         | PNP, 2 wire 4...20 mA<br>4 wire, PNP, or NPN 24V  | XUYP•••••925<br>XUYPS•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Fiber           | 3 wire, PNP 24V<br>3 wire, NPN 24V<br>4 wire, PNP, or NPN 24V   | XUDA•P•••••<br>XUDA•N•••••<br>XUYAF•••••   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | Other formats   | 3 wire, programmable PNP/NPN DC<br>5 wire, programmable AC/DC<br>3 wire, NPN 24V + analog<br>2 wire, AC<br>5 wire, programmable AC/DC<br>3 wire, programmable PNP/NPN DC<br>5 wire, programmable AC/DC                    | XUC2/8/9AK•••••<br>XUC2/8/9ARC•••••<br>XUE•AA•••••<br>XULA•••••<br>XULM•••••<br>XUYB••••S<br>XUYB••••R   |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |
|                        | M 18, threaded  | 2 wire, AC/DC   | XU5/8/9M18MA•••••  |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |  |

|              |
|--------------|
| Compatible   |
| Incompatible |

# Modicon X80 I/O platform

Inputs and OsiSense XS inductive proximity sensors

| Proximity sensors  |                     | Reference  | ... inputs, BMXDDI |      |       |       | 6402K | ... inputs, BMXDDM |       |       | ... inputs, BMXAMI |      | ~ inputs, BMXDAI |      |      |      |
|--|---------------------|--|--------------------|------|-------|-------|-------|--------------------|-------|-------|--------------------|------|------------------|------|------|------|
| Type   | General purpose     |  | 1602               | 1603 | 1604T | 3202K |       | 16022              | 16025 | 3202K | 0810               | 0800 | 1602             | 1603 | 1604 | 0805 |
| Cylindrical, flush, standard sensing distance, short barrel    | Ø 6.5 plain short   | 3 wire, PNP 24V<br>XS506B1P•••<br>3 wire, NPN 24V<br>XS506B1N•••<br>2 wire, DC 24V<br>XS506BSD/C•••            |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M8, threaded short  | 3 wire, PNP 24V<br>XS508B1P•••<br>3 wire, NPN 24V<br>XS508B1N•••<br>2 wire, DC 24V<br>XS508BSD/C•••            |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded short | 3 wire, PNP 24V<br>XS512B1P•••<br>3 wire, NPN 24V<br>XS512B1N•••<br>2 wire, DC 24V<br>XS512BSD/C•••            |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded short | 3 wire, PNP 24V<br>XS518B1P•••<br>3 wire, NPN 24V<br>XS518B1N•••<br>2 wire, DC 24V<br>XS518BSD/C•••            |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded short | 3 wire, PNP 24V<br>XS530B1P•••<br>3 wire, NPN 24V<br>XS530B1N•••<br>2 wire, DC 24V<br>XS530BSD/C•••            |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
| Cylindrical, flush, standard sensing distance, long barrel     | M8, threaded long   | 3 wire, PNP 24V-48V<br>XS508BLP•••<br>3 wire, NPN 24V-48V<br>XS508BLN•••<br>2 wire, DC 24V-48V<br>XS508BD/C••• |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded long  | 3 wire, PNP 24V-48V<br>XS512BLP•••<br>3 wire, NPN 24V-48V<br>XS512BLN•••<br>2 wire, DC 24V-48V<br>XS512BD/C••• |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 3 wire, PNP 24V-48V<br>XS518BLP•••<br>3 wire, NPN 24V-48V<br>XS518BLN•••<br>2 wire, DC 24V-48V<br>XS518BD/C••• |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 3 wire, PNP 24V-48V<br>XS530BLP•••<br>3 wire, NPN 24V-48V<br>XS530BLN•••<br>2 wire, DC 24V-48V<br>XS530BD/C••• |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded long  | 2 wire, AC/DC<br>XS512B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 2 wire, AC/DC<br>XS518B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 2 wire, AC/DC<br>XS530B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
| Cylindrical, flush, extended sensing distance, short barrel    | Ø 6.5 plain short   | 3 wire, PNP 24V<br>XS106B3P•••<br>3 wire, NPN 24V<br>XS106B3N•••<br>2 wire, DC 24V<br>XS606B3C•••              |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M8, threaded short  | 3 wire, PNP 24V<br>XS108B3P•••<br>3 wire, NPN 24V<br>XS108B3N•••<br>2 wire, DC 24V<br>XS608B3C•••              |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded short | 3 wire, PNP 24V<br>XS112B3P•••<br>3 wire, NPN 24V<br>XS112B3N•••<br>2 wire, DC 24V<br>XS612B3D•••              |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded short | 3 wire, PNP 24V<br>XS118B3P•••<br>3 wire, NPN 24V<br>XS118B3N•••<br>2 wire, DC 24V<br>XS618B3D•••              |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded short | 3 wire, PNP 24V<br>XS130B3P•••<br>3 wire, NPN 24V<br>XS130B3N•••<br>2 wire, DC 24V<br>XS630B3D•••              |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
| Cylindrical, flush, extended sensing distance, long barrel     | M8, threaded long   | 3 wire, PNP 24V-48V<br>XS608B1P•••<br>3 wire, NPN 24V-48V<br>XS608B1N•••<br>2 wire, DC 24V-48V<br>XS608B1D•••  |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded long  | 3 wire, PNP 24V-48V<br>XS612B1P•••<br>3 wire, NPN 24V-48V<br>XS612B1N•••<br>2 wire, DC 24V-48V<br>XS612B1D•••  |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 3 wire, PNP 24V-48V<br>XS618B1P•••<br>3 wire, NPN 24V-48V<br>XS618B1N•••<br>2 wire, DC 24V-48V<br>XS618B1D•••  |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 3 wire, PNP 24V-48V<br>XS630B1P•••<br>3 wire, NPN 24V-48V<br>XS630B1N•••<br>2 wire, DC 24V-48V<br>XS630B1D•••  |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded long  | 2 wire, AC/DC<br>XS612B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 2 wire, AC/DC<br>XS618B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 2 wire, AC/DC<br>XS630B1M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
| Cylindrical, non flush, extended sensing distance, long barrel | M12, threaded long  | 3 wire, PNP 24V-48V<br>XS612B4P•••<br>3 wire, NPN 24V-48V<br>XS612B4N•••                                       |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 3 wire, PNP 24V-48V<br>XS618B4P•••<br>3 wire, NPN 24V-48V<br>XS618B4N•••                                       |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 3 wire, PNP 24V-48V<br>XS630B4P•••<br>3 wire, NPN 24V-48V<br>XS630B4N•••                                       |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M12, threaded long  | 2 wire, AC/DC<br>XS612B4M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M18, threaded long  | 2 wire, AC/DC<br>XS618B4M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |
|  | M30, threaded long  | 2 wire, AC/DC<br>XS630B4M•••   |                    |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |

Compatible  
Incompatible

# Modicon X80 I/O platform

Inputs and OsiSense XS inductive proximity  
sensors (continued)

| Proximity sensors   | Type               | Reference                  | ... inputs, BMXDDI    |      |       |       | 6402K | ... inputs, BMXDDM |       |       | ... inputs, BMXAMI |      | ~ inputs, BMXDAI |      |      |      |      |
|---|--------------------|----------------------------|-----------------------|------|-------|-------|-------|--------------------|-------|-------|--------------------|------|------------------|------|------|------|------|
|   |                    |                            | 1602                  | 1603 | 1604T | 3202K |       | 16022              | 16025 | 3202K | 0810               | 0800 | 1602             | 1603 | 1604 | 0805 | 0814 |
| <b>General purpose</b>  |                    |                            |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Flat, flush mountable, Format J 8x22x8<br>standard sensing distance           | 3 wire, PNP 24V    | XSTJ1A1P●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSTJ1A1N●●●                |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V     | XSTJ1A1D●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format F 15x22x8  | 3 wire, PNP 24V    | XSTF1A1P●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSTF1A1N●●●                |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V     | XSTF1A1D●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format E 26x26x13   | 3 wire, PNP 24V    | XSTE1A1P●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSTE1A1N●●●                |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V     | XSTE1A1D/C●●●              | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format C 40x40x15   | 3 wire, PNP 24V    | XSTC1A1P●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSTC1A1N●●●                |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V     | XSTC1A1D/C●●●              | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format D 80x80x26   | 3 wire, PNP 24V    | XSTD1A1P●●●                | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSTD1A1N●●●                |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V     | XSTD1A1D/C●●●              | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format 40X40X70<br>and 40X40X117<br>Plastic, with turret<br>head: 5 positions | NO + NC            | 4 wire, PNP 24V-48V        | XST/XS8C2/C4A1/A4P●●● | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V-48V        | XST/XS8C2/C4A1/A4N●●● |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | NO/NC programmable | 2 wire, DC 24V-48V         | XST/XS8C2/C4A1/A4D●●● | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 2 wire, AC/DC              | XST/XS8C2/C4A1/A4M●●● |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Flat, flush mountable, Format E 26x26x13<br>extended sensing distance         | 3 wire, PNP 24V    | XSE1A1P●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSE1A1N●●●                 |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, AC/DC      | XSE1A1M●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format C 40x40x15   | 3 wire, PNP 24V    | XSC1A1P●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSC1A1N●●●                 |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, AC/DC      | XSC1A1M●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Format D 80x80x26   | 3 wire, PNP 24V    | XSD1A1P●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V    | XSD1A1N●●●                 |                       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, AC/DC      | XSD1A1M●●●                 | ●                     |      |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical<br>multi-voltage  | M12, threaded      | 2 wire, AC/DC              | XSI/2M12M●250         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded      | 2 wire, AC/DC              | XSI/2M18M●250         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded      | 2 wire, AC/DC              | XSI/2M30M●250         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical Metal,<br>4 wire  | Ø 6.5, plain       | 4 wire, PNP 24V            | XSL06PC410            | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V            | XSL06NC410            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M8, threaded       | 4 wire, PNP 24V            | XSI/2M08PC410●        | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V            | XSI/2M08NC410●        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M12, threaded      | 4 wire, PNP 24V            | XSI/2N12PC410●        | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V            | XSI/2N12NC410●        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded      | 4 wire, PNP 24V            | XSI/2N18PC410●        | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V            | XSI/2N18NC410●        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded      | 4 wire, PNP 24V            | XSI/2N30PC410●        | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 4 wire, NPN 24V            | XSI/2N30NC410●        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical Metal,<br>4 wire PNP + NPN  | M12, threaded      | 4 wire, PNP+NPN, prog. 24V | XSI/24M12KP340●       | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded      | 4 wire, PNP+NPN, prog. 24V | XSI/24M18KP340●       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded      | 4 wire, PNP+NPN, prog. 24V | XSI/24M30KP340●       |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical Plastic,<br>non flush,<br>standard sensing<br>distance            | M8, threaded       | 3 wire, PNP 24V            | XSP08P●340●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, PNP 24V-48V        | XSP08P●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V            | XSP08N●340●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V-48V        | XSP08N●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 2 wire, AC/DC              | XSP08M●230●●●         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M12, threaded      | 3 wire, PNP 24V            | XSP12P●340●           | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, PNP 24V-48V        | XSP12P●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V            | XSP12N●340●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V-48V        | XSP12N●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 2 wire, AC/DC              | XSP12M●230●●●         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded      | 3 wire, PNP 24V            | XSP18P●340●           | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, PNP 24V-48V        | XSP18P●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V            | XSP18N●340●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V-48V        | XSP18N●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 2 wire, AC/DC              | XSP18M●230●●●         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded      | 3 wire, PNP 24V            | XSP30P●340●           | ●    |       | ●     |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, PNP 24V-48V        | XSP30P●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V            | XSP30N●340●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 3 wire, NPN 24V-48V        | XSP30N●370●           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                    | 2 wire, AC/DC              | XSP30M●230●●●         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |

|              |
|--------------|
| Compatible   |
| Incompatible |

# Modicon X80 I/O platform

Inputs and OsiSense XS inductive proximity  
sensors (*continued*)

| Proximity sensors   |                                 | Reference                       | ... inputs, BMXDDI     |      |       |       | 6402K | ... inputs, BMXDDM |       |       | ... inputs, BMXAMI |      | ~ inputs, BMXDAI |      |      |      |      |
|---|---------------------------------|---------------------------------|------------------------|------|-------|-------|-------|--------------------|-------|-------|--------------------|------|------------------|------|------|------|------|
| Type  |                                 |                                 | 1602                   | 1603 | 1604T | 3202K |       | 16022              | 16025 | 3202K | 0810               | 0800 | 1602             | 1603 | 1604 | 0805 | 0814 |
| <b>General purpose</b>  |                                 |                                 |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical basic flush or non flush, standard sensing distance, Plastic or Metal | Ø 6.5 plain                     | 3 wire, PNP 24V                 | XS1/206BLP•••          |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1/206BLN•••          |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M8, threaded                    | 3 wire, PNP 24V                 | XS1/208A/BLP•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1/208A/BLN•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M12, threaded                   | 3 wire, PNP 24V                 | XS1/212A/BLP•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1/212A/BLN•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded                   | 3 wire, PNP 24V                 | XS1/218A/BLP•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1/218A/BLN•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded                   | 3 wire, PNP 24V                 | XS1/230A/BLP•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1/230A/BLN•••        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical, almost flush, extended sensing distance                              | M18, threaded                   | 3 wire, PNP 24V                 | XS1N18P•349•           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1N18N•349•           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M30, threaded                   | 3 wire, PNP 24V                 | XS1N30P•349•           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1N30N•349•           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical, miniature  | Ø 4 plain                       | 3 wire, PNP 24V                 | XS1L04P•31••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1L04N•31••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M5, threaded                    | 3 wire, PNP 24V                 | XS1N05P•31••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS1N05N•31••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Ø 6.5 plain                     | 3 wire, PNP 24V                 | XS2L06P•340•           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| <b>Application</b>  |                                 |                                 |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical, adjustable sensing distance  | M12, threaded                   | 3 wire, PNP 24V                 | XS612B2P•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS612B2N•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded                   | 3 wire, PNP 24V                 | XS618B2P•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS618B2N•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Rotation monitoring   | M30, threaded                   | 3 wire, PNP 24V                 | XS630B2P•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XS630B2N•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded                   | 3 wire, PNP 24V-48V             | XSAV11/2373            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 2 wire, AC/DC                   | XSAV11/2801            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Analog output   | Format E 26x26x13               | 3 wire, PNP 24V                 | XS9•11RP••••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Format C 40x40x15               | 2 wire, AC/DC                   | XS9•11RM••••           |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M12, threaded                   | 2 wire 4...20mA; 3 wire 0...10V | XS•12AB••••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | M18, threaded                   | 2 wire 4...20mA; 3 wire 0...10V | XS•18AB••••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Food and beverage   | M30, threaded                   | 2 wire 4...20mA; 3 wire 0...10V | XS•30AB••••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Block format                    | 2 wire 4...20mA; 3 wire 0...10V | XS9C2/C4A2••••         |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire 4...20mA; 3 wire 0...10V | XS9•111A••••                    |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Cylindrical threaded Metal      | 3 wire, PNP 24V                 | XS2••SAP•••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, PNP 24V                 | XS908/12/18/30R/S•P••• |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical threaded Plastic  | 3 wire, NPN 24V                 | XS2••SAN•••                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, AC/DC                   | XS2••SAM•••                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, PNP 24V-48V             | XS2••AAP•••                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 3 wire, NPN 24V                 | XS2••AAN•••                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Factor 1  | 2 wire, AC/DC                   | XS2••AAMA•••                    |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Cylindrical threaded Metal      | 4 wire, PNP+NPN 24V             | XS1M••KPM40            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Format C, 40 x 117 x 41         | 4 wire, PNP+NPN 24V             | XS9C2/C4A••••          |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Packaging   | Cylindrical threaded Metal      | 3 wire, PNP 24V                 | XS1M18PAS••            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Format 12x26x40                 | 3 wire, PNP 24V                 | XSTG12P•140            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 3 wire, NPN 24V                 | XSTG12N•140            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 4 wire, PNP 24V-48V             | XSTG12P•440            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 4 wire, NPN 24V-48V             | XSTG12N•440            |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Material handling   | 2 wire, AC/DC                   | XSTG12M•230                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Format C 40x40x40               | 2 wire, DC 24V-48V              | XSTT4DA•••             |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   |                                 | 4 wire, PNP 24V-48V             | XSTT4PC•••             |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Welding   | 4 wire, NPN 24V-48V             | XSTT4NC•••                      |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | Format D 80x80x26               | 2 wire, DC 24V-48V              | XSTD1•••••             |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
| Cylindrical Metal   | 3 wire, PNP 24V                 | XS1M••PAW••                     |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |
|   | 2 wire, DC 24V-48V              | XSLC•••                         |                        |      |       |       |       |                    |       |       |                    |      |                  |      |      |      |      |

Compatible

Incompatible



---

### Technical appendices

- Standards, certifications and environmental conditions ..... page 8/2
- Certifications for automation products and EC regulations ..... page 8/8

### **Standards and certifications**

The Modicon X80 I/O platform has been developed to comply with the principal national and international standards concerning electronic equipment for industrial automation systems.

- Requirements specific to programmable controllers: functional characteristics, immunity, resistance, safety, etc.: IEC/EN 61131-2 and IEC/EN/UL/CSA 61010-2-201, UL508
- Requirements specific to power utility automation systems: IEC/EN 61000-6-5, IEC/EN 61850-3
- Merchant navy requirements of the major international organizations: unified in IACS (International Association of Classification Societies)
- Compliance with European Directives for CE marking:
  - Low voltage: 2014/35/EU
  - Electromagnetic compatibility: 2014/30/EU
  - Machinery: 2006/42/EC
  - Ex areas:
    - For USA and Canada: Hazardous location class I, division 2, groups A,B,C, and D
    - For other countries: CE ATEX (2014/34/EU) or IECEx in defined atmosphere Zone 2 (gas) and/or Zone 22 (dust)

Up-to-date information on which certifications have been obtained is available on our website.

X80 I/O platform is considered as open equipment and is designed for use in industrial environments, in pollution degree 2, overvoltage category II (IEC 60664-1), and in low-voltage installations, where the main power branch is protected on both wires by devices such as fuses or circuit breakers limiting the current to 15A for North America and 16A for the rest of the world.

All safety modules are certified by TÜV Rheinland. The certificate reviews the following standards:

#### **Functional safety specifications**

IEC 61508: Functional safety of electrical/electronic/programmable electronic safety-related systems

- IEC 61508-1 - Part 1: General requirements
- IEC 61508-2 - Part 2: Requirements for electrical/electronic/programmable electronic safety related systems
- IEC 61508-3 - Part 3: Software requirements

IEC 61511: Functional safety - Safety instrumented systems for the process industry sector

- IEC 61511-1 - Part 1: Framework, definitions, system, hardware and software requirements
- IEC 61511-2 - Part 2: Guidelines for the application of IEC 61511-1
- IEC 61511-3 - Part 3: Guidance for the determination of the required safety integrity levels

#### **Safety machinery specifications**

- IEC 62061: Safety of machinery - Functional safety of safety-related electrical, electronic and programmable electronic control systems
- ISO 13849-1: Safety of machinery - Safety-related parts of control systems - Part 1: General principles for design
- ISO 13849-2: 2012 Safety Related parts of the Control Systems - Part 2: Validation

#### **Fire & Gas specifications**

- EN54.2: 1997 + Amd1 2007 fire detection + fire alarms systems – Part 2: Control and indicating equipment.
- EN 50156-1: 2015 Equipment for furnaces and ancillary equipment - Part 1: Requirements for application design and installation
- EN 50130-4: 2011 Immunity requirements components of fire, intruder, holdup, CCTV, access control and social alarms systems
- EN 298: 2012 Automatic burner control systems for burners and appliances burning gaseous or liquid fuels
- NFPA 85: 2015 Boiler and Combustion Systems Hazards Code
- NFPA 86: 2015 Standard for ovens and furnaces
- NFPA 72: 2016 National Fire Alarm and Signaling Code

| <b>Characteristics</b>   |   |    |  |                              |                                |               |  |             |             |
|--|---|----|--|------------------------------|--------------------------------|---------------|--|-------------|-------------|
| Service conditions and recommendations relating to the environment |   |    |  |                              |                                |               |  |             |             |
|  |   |    | Modicon X80 I/O platform   | Modicon M580 Safety platform | Modicon X80 harsh I/O platform |               |  |             |             |
| Temperature  | Operation                                   | °C | 0...+ 60   | -25...+60                    | -25...+70                      |               |  |             |             |
|  | Storage                                     | °C | -40...+85  | -40...+85                    | -40...+85                      |               |  |             |             |
| Relative humidity<br>(without condensation)                        | Cyclical humidity                           | %  | +5 ... +95 up to 55 °C/131 °F  | +5...+95 up to 55 °C/131 °F  | +5 ... +95 up to 55 °C/131 °F  |               |  |             |             |
|  | Continuous humidity                         | %  | +5 ... +93 up to 55 °C/131 °F  | +5...+93 up to 60 °C/140 °F  | +5 ... +93 up to 60 °C/140 °F  |               |  |             |             |
| Altitude   | Operation                                   | m  | 0...2,000 (full specification: temperature and isolation)<br>2,000...5,000 (temperature derating: approx. 1 °C/400 m, isolation 150 V/1,000m)<br>For accurate temperature derating calculation, refer to IEC 61131-2 Ed4.0 Annex A |                              |                                |               |  |             |             |
|  | <b>Modicon X80 I/O power supply modules</b> |    |  |                              |                                |               |  |             |             |
| Supply voltage   |   |    | BMXCPS2010   | BMXCPS3020<br>BMXCPS3020H    | BMXCPS3540T                    | BMXCPS2000    | BMXCPS3500<br>BMXCPS3500H<br>BMXCP3522S<br>BMXCPS4002<br>BMXCPS4002S<br>BMXCPS4002H<br>BMXCPS4022S |             |             |
|  |   |    | Nominal voltage  | V                            | 24 ...                         | 24...48 ...   | 125 ...  | 100...240 ~ | 100...240 ~ |
|  |   |    | Limit voltages   | V                            | 18...31.2 ...                  | 18...62.4 ... | 100...150 ...  | 85...264 ~  | 85...264 ~  |
|  |   |    | Nominal frequencies  | Hz                           | —                              | —             | —  | 50/60       | 50/60       |
|  |   |    | Limit frequencies  | Hz                           | —                              | —             | —  | 47/63       | 47/63       |

### Protective treatment of the Modicon X80 I/O platform

The Modicon X80 I/O platform meets the requirements of "TC" treatment (*Treatment for all Climates*).

For installations in industrial production workshops or environments corresponding to "TH" treatment (*treatment for hot and humid environments*), Modicon X80 I/O must be housed in enclosures with minimum IP 54 protection.

The Modicon X80 I/O platform offers **protection to IP 20 level** and **protection against pins** (enclosed equipment) (1). It can therefore be installed without an enclosure in reserved-access areas that do not exceed **pollution level 2** (control room with no dust-producing machine or activity). Pollution level 2 does not take account of more severe environmental conditions: air pollution by dust, smoke, corrosive or radioactive particles, vapors or salts, molds, insects, etc.

(1) In cases where a slot is not occupied by a module, a **BMXXEM010** protective cover must be installed.

(CE): tests required by European directives (CE) and based on IEC/EN 61131-2 standards.

| Environment tests  |  |  |
|--|--|--|
| Name of test   | Standards  | Levels   |
| <b>Immunity to LF interference (CE) (1)</b>              |  |  |
| Voltage and frequency variations                         | IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-11<br>IACS E10; IEC 61000-4-11   | 0.85...1.10 Un - 0.94...1.04 Fn; 4 steps t = 30 min<br>0.80 Un...0.90 Fn; 1.20 Un...1.10 Fn; t = 1.5 s/5 s   |
| Direct voltage variations                                | IEC/EN 61131-2; IEC 61000-4-29;<br>IACS E10 (PLC not connected to charging battery)  | 0.85...1.2 Un + ripple: 5% peak; 2 steps t = 30 min  |
| Third harmonic   | IEC/EN 61131-2   | H3 (10% Un), 0°/180°; 2 steps t = 5 min  |
| Immunity to conducted low frequency (only IACS)          | IACS E10   | For $\sim$ :<br>■ H2...H15 (10% Un), H15...H100 (10%...1% Un), H100...H200 (1% Un)<br>For $\equiv$ :<br>■ H2...H200 (10% Un)   |
| Voltage interruptions                                    | IEC/EN 61131-2; IEC/EN 61000-6-2;<br>IEC 61000-4-11; IEC 61000-4-29; IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1<br><br>IEC/EN 61131-2; IEC/EN 61000-6-2;<br>IEC 61000-4-11 | Power supply immunity:<br>■ 1 ms for $\equiv$ ; PS1/10 ms for $\sim$ PS2 (20 ms DS criteria), 85% Un<br>■ Check operating mode for longer interruptions<br>■ up to 5s, 85% Un<br>■ for IACS, 3 times 30 s in 5 min, 85% Un<br><br>For PS2:<br>■ 20% Un, t0: $\frac{1}{2}$ period<br>■ 40% Un, cycle 10/12<br>■ 70% Un, cycle: 25/30<br>■ 0% Un, cycle 250/300<br><br>■ Un...0...Un; t = Un/60 s<br>■ Umin...0...Umin; t = Umin/5 s<br>■ Umin...0.9 Udl...Umin; t = Umin/60 s |
| Voltage shut-down and start-up                           | IEC/EN 61131-2   |  |
| Magnetic field   | IEC/EN 61131-2; IEC 61000-4-8 (for MV power stations:<br>IEC 61000-6-5; IEC 61850-3)<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1<br>IEC 61000-4-10                                   | Power frequency: 50/60 Hz, 100 A/m continuous<br>...1000 A/m; t = 3 s; 3 axes<br><br>Oscillatory: 100 kHz...1 MHz, 100 A/m; t = 9 s; 3 axes  |
| Conducted common mode disturbances range 0 Hz ...150 kHz | IEC 61000-4-16<br>(for MV power stations: IEC 61000-6-5; IEC 61850-3)<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1  | For remote systems:<br>■ 50/60 Hz and $\equiv$ , 300 V, t = 1s<br>■ 50/60 Hz and $\equiv$ , 30 V, t = 1 min<br>■ 5 Hz...150 kHz, sweep 3 V...30 V<br>■ For AC: 10 V<br>■ For DC: 10 V cont. or 100 V, t = 1 s  |

Where:

- PS1 applies to PLC supplied by battery, PS2 applies to PLC energized from  $\sim$  or  $\equiv$  supplies
- Un: nominal voltage, Fn: nominal frequency, Udl: detection level when powered

(1) Devices must be installed, wired, and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) These tests are performed without an enclosure, with devices fixed on a metal grid and wired as per the recommendations in the manual "Grounding and Electromagnetic Compatibility of PLC systems".

(CE): tests required by European CE directives and based on IEC/EN 61131-2.

| <b>Environment tests (continued)</b>                              |  |  |
|---|--|--|
| Name of test  | Standards  | Levels   |
| <b>Immunity to HF interference (CE) (1)</b>                       |  |  |
| Electrostatic discharges  | IEC/EN 61131-2; IEC/EN 61000-6-2;<br>IEC 61000-4-2; IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1 | 6 kV contact; 8 kV air; 6 kV indirect contact  |
| Radiated radio frequency electromagnetic field                    | IEC/EN 61131-2; IEC/EN 61000-6-2;<br>IEC 61000-4-3; IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1 | 80MHz...1GHz: 10/15 V/m (20 V/m DS criteria); 3 V/m,<br>1.4 GHz...2 GHz: 3V/m (10 V/m DS criteria)<br>2 GHz...6 GHz: 3V/m<br>Sinus amplitude modulated 80%, 1 kHz + internal clock frequencies   |
| Electrical fast transient bursts                                  | IEC/EN 61131-2; IEC/EN 61000-6-2;<br>IEC 61000-4-4; IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1 | For ~ or --- main supplies:<br>■ 2 kV in common mode/2 kV in wire mode (4 kV DS criteria with external protection)<br>For ~ or --- auxiliary supplies, ~ unshielded I/O:<br>■ 2 kV in common mode<br>For analog, --- unshielded I/O, communication and shielded lines:<br>■ 1 kV in common mode (3 kV DS criteria)                 |
| Surge   | IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-5;<br>IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1 | For ~/--- main and auxiliary supplies, ~ unshielded I/O:<br>■ 2 kV in common mode/1 kV in differential mode (4 kV DS criteria with external protection)<br>For analog, --- unshielded I/O:<br>■ 2 kV in common mode/2 kV in differential mode<br>For communication and shielded lines:<br>■ 1 kV in common mode (3 kV DS criteria) |
| Conducted disturbances induced by radiated electromagnetic fields | IEC/EN 61131-2; IEC/EN 61000-6-2; IEC 61000-4-6;<br>IACS E10<br>For functional safety (DS criteria):<br>IEC 61000-6-7; IEC 61326-3-1 | 10 V; 0.15 MHz...80 MHz (20 V DS criteria)<br>Sinus amplitude 80%, 1 kHz + spot frequencies  |
| Damped oscillatory wave   | IEC/EN 61131-2; IEC 61000-4-18;<br>IACS E10  | For ~/--- main supplies and ~ auxiliary supplies, ~ unshielded I/O:<br>■ 2.5 kV in common mode/1 kV in differential mode<br>For --- auxiliary supplies, analog, --- unshielded I/O:<br>■ 1 kV in common mode/0.5 kV in differential mode<br>For communication and shielded lines:<br>■ 0.5 kV in common mode                       |

(1) Devices must be installed, wired, and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) These tests are performed without an enclosure, with devices fixed on a metal grid and wired as per the recommendations in the manual "Grounding and Electromagnetic Compatibility of PLC systems".

(CE): tests required by European CE directives and based on IEC/EN 61131-2.

| <b>Environment tests (continued)</b>                    |  |   |
|---|--|---|
| <b>Name of test</b>                                     | <b>Standards</b>   | <b>Levels</b>   |
| <b>Electromagnetic emissions (CE) (1)</b>               |  |   |
| Conducted emission                                      | IEC/EN 61131-2; IEC/EN 61000-6-4; CISPR 11 & 22, Class A, Group 1 (FCC part 15 compliance) | 150 kHz ... 500 kHz: quasi-peak 79 dB ( $\mu$ V/m); average 66 dB ( $\mu$ V/m)<br>500 kHz ... 30 MHz: quasi-peak 73 dB ( $\mu$ V/m); average 60 dB ( $\mu$ V/m)   |
|   | IACS E10   | ■ ~/--- power (general power distribution zone):<br>10 kHz ... 150 kHz: quasi-peak 120...69 dB ( $\mu$ V/m);<br>150 kHz ... 0.5 MHz: quasi-peak 79 dB ( $\mu$ V/m)<br>0.5 MHz ... 30 MHz: quasi-peak 73 dB ( $\mu$ V/m)<br>■ ~/--- power (bridge and deck zone for evaluation):<br>10 kHz ... 150 kHz: quasi-peak 96...50 dB ( $\mu$ V/m)<br>150 kHz ... 0.35 MHz: quasi-peak 60...50 dB ( $\mu$ V/m)<br>0.35 MHz ... 30 MHz: quasi-peak 50 dB ( $\mu$ V/m) |
| Radiated emission                                       | IEC/EN 61131-2; IEC/EN 61000-6-4; CISPR 11 & 22, Class A, Group 1 (FCC part 15 compliance) | 30 MHz ... 230 MHz: quasi-peak 40 dB ( $\mu$ V/m) (at 10 m);<br>230 MHz ... 1 GHz: quasi-peak 47 dB ( $\mu$ V/m) (at 10 m);<br>1 GHz ... 3 GHz: quasi-peak 76 dB ( $\mu$ V/m) (at 3 m);<br>3 GHz ... 6 GHz: quasi-peak 80 dB ( $\mu$ V/m) (at 3 m);   |
|   | IACS E10   | ■ For general power distribution zone<br>0.15 MHz ... 30 MHz: quasi-peak 80...50 dB ( $\mu$ V/m) (at 3 m)<br>30 MHz-100 MHz: quasi-peak 60...54 dB ( $\mu$ V/m) (at 3 m)<br>100 MHz - 2 GHz: quasi-peak 54 dB ( $\mu$ V/m) (at 3 m)<br>156 ... 165 MHz: quasi-peak 24 dB ( $\mu$ V/m) (at 3 m)  |
| <b>Name of test</b>                                     | <b>Standards</b>   | <b>Levels</b>   |
| <b>Immunity to climatic variations (1) (power on)</b>   |  |   |
| Dry heat  | IEC 60068-2-2 (Bb & Bd)  | 60 °C/140 °F, t = 16 hrs<br>[for ruggedized range: 70 °C/158 °F, t = 16 hrs] (2)  |
|   | IACS E10   | 60 °C/140 °F, t = 16 hrs + 70 °C/158 °F, t = 2 hrs<br>[for ruggedized range: 70 °C/158 °F, t = 18 hrs] (2)  |
| Cold  | IEC 60068-2-1 (Ab & Ad)<br>IACS E10  | 0 °C...- 25 °C/32 °F...-13 °F, t = 16 hrs + power on at 0 °C<br>[for ruggedized range: power on at -25 °C/-13 °F] (2)   |
| Damp heat, steady state (continuous humidity)           | IEC 60068-2-78 (Cab);<br>IACS E10  | 55 °C/131 °F, 93% relative humidity, t = 96 hrs<br>[for ruggedized range: 60 °C/140 °F] (2)   |
| Damp heat, cyclic (cyclical humidity)                   | IEC 60068-2-30 (Db);<br>IACS E10   | 55 °C...25 °C/131 °F...77 °F, 93...95% relative humidity,<br>2 cycles t = 12 hrs +12 hrs  |
| Change of temperature                                   | IEC 60068-2-14 (Nb)  | 0 °C ... 60 °C/32 °F...140 °F, 5 cycles t = 6 hrs + 6 hrs<br>[for ruggedized range: -25 °C...70 °C/-13 °F...158 °F] (2)   |
| <b>Name of test</b>                                     | <b>Standards</b>   | <b>Levels</b>   |
| <b>Withstand to climatic variations (1) (power off)</b> |  |   |
| Dry heat  | IEC/EN 61131-2; IEC 60068-2-2 (Bb & Bd)<br>IEC/EN 60945                                    | 85 °C/185 °F, t = 96 hrs  |
| Cold  | IEC/EN 61131-2; IEC 60068-2-1 (Ab & Ad);<br>IACS E10                                       | -40 °C/-40 °F, t = 96 hrs   |
| Damp heat, cyclic (cyclical humidity)                   | IEC/EN 61131-2; IEC 60068-2-30 (Db)  | 55 °C...25 °C/77 °F...131 °F, 93...95% relative humidity,<br>2 cycles t = 12 hrs +12 hrs  |
| Change of temperature (thermal shocks)                  | IEC/EN 61131-2; IEC 60068-2-14 (Na)  | -40 °C...85 °C/-40 °F...185 °F, 5 cycles t = 3 hrs + 3 hrs  |

(1) Devices must be installed, wired, and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) Refer also to the chapter "Treatment for severe environments".

(CE): tests required by European CE directives and based on IEC/EN 61131-2 standards.

| <b>Environment tests (continued)</b>                     |   |   |
|--|---|---|
| Name of test   | Standards                                       | Levels  |
| <b>Immunity to mechanical constraints (1) (power on)</b> |   |   |
| Sinusoidal vibrations                                    | IEC/EN 61131-2;<br>IEC 60068-2-6 (Fc)           | Basic IEC/EN 61131-2: 5 Hz ... 150 Hz, $\pm 3.5$ mm amplitude (5 Hz .... 8.4 Hz), 1 g (8.4 Hz .... 150 Hz)<br>Specific profile: 5 Hz ... 150 Hz, $\pm 10.4$ mm amplitude (5 Hz .... 8.4 Hz), 3 g (8.4 Hz .... 150 Hz)<br>For basic and specific: endurance: 10 sweep cycles for each axis |
|  | IEC 60870-2-2 ;<br>IEC 60068-2-6<br>(Class Cm)  | 2 Hz ... 500 Hz, 7 mm amplitude (2 Hz ... 9 Hz),<br>2 g (9 Hz ... 200 Hz), 1.5 g (200 Hz ... 500 Hz)<br>endurance: 10 sweep cycles for each axis  |
|  | IACS E10  | 3 Hz ... 100 Hz, 1 mm amplitude (3 Hz .... 13.2 Hz), 0.7 g (13.2 Hz .... 100 Hz)<br>Endurance at each resonance frequency: 90 min for each axis, amplification coefficient < 10   |
|  | IEC 60068-2-6                                   | Seismic analysis: 3 Hz ... 35 Hz, 22.5 mm amplitude (3 Hz .... 8.1 Hz), 6 g (8.1 Hz .... 35 Hz)   |
| Shock  | IEC/EN 61131-2;<br>IEC 60068-2-27 (Ea)          | 30 g, 11 ms; 3 shocks/direction/axis (2)<br>For M580 Safety: 15 g, 11 ms; 3 shocks/direction/axis<br>25 g, 6 ms; 100 bumps/direction/axis (bumps) (3)   |
| Free fall during operation                               | IEC/EN 61131-2;<br>IEC 60068-2-32 (Ed Method 1) | 1 m/3.28 ft, 2 falls  |
| Name of test   | Standards                                       | Levels  |
| <b>Withstand to mechanical constraints (power off)</b>   |   |   |
| Random free fall with packaging                          | IEC/EN 61131-2;<br>IEC 60068-2-32 (Method 1)    | 1 m/3.28 ft, 5 falls  |
| Flat free fall   | IEC/EN 61131-2;<br>IEC 60068-2-32 (Ed Method 1) | 10 cm/0.33 ft, 2 falls  |
| Controlled free fall                                     | IEC/EN 61131-2;<br>IEC 60068-2-31 (Ec)          | 30° or 10 cm/0.33 ft, 2 falls   |
| Plugging/Unplugging                                      | IEC/EN 61131-2                                  | For modules and connectors:<br>Operations: 50 for permanent connections, 500 for non-permanent connections  |
| Name of test   | Standards                                       | Levels  |
| <b>Equipment and personnel safety (1) (CE)</b>           |   |   |
| Dielectric strength and insulation resistance            | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | Dielectric: 2 Un + 1000 V; t = 1 min<br>Insulation: Un $\leq$ 50 V: 10 M $\Omega$ , 50 V $\leq$ Un $\leq$ 250 V : 100 M $\Omega$  |
| Ground continuity  | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | 30A, R $\leq$ 0,1Ω; t = 2 min   |
| Leakage current  | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | $\leq$ 0.5 mA in normal condition<br>$\leq$ 3.5 mA in single fault condition  |
| Protection offered by enclosures                         | IEC/EN 61131-2;<br>IEC 61010-2-201;             | IP20 and protection against standardized pins   |
| Impact withstand   | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | Sphere of 500 g, fall from 1.30 m (energy 6.8 J minimum)  |
| Overload   | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | 50 cycles, Un, 1.5 In; t = 1 s ON + 9 s OFF   |
| Endurance  | IEC/EN 61131-2;<br>IEC 61010-2-201; UL; CSA     | In, Un; 6000 cycles: t = 1 s ON + 9 s OFF   |
| Temperature rise   | IEC/EN 61131-2; UL; CSA; ATEX; IECEX            | Ambient temperature 60 °C/140 °F<br>[for ruggedized range: 70 °C/158 °F] (4)  |
| Name of test   | Standards                                       | Levels  |
| <b>Specific environment (4)</b>                          |   |   |
| Corrosion areas - gas, salt, dust                        | ISA S71.4                                       | Flowing mixed gas; class Gx, 25 °C/77 °F,<br>75% relative humidity, t = 14 days   |
|  | IEC/EN 60721-3-3<br>IEC60068-2-60               | Flowing mixed gas; class 3C3, 25 °C/77 °F,<br>75% relative humidity, t = 14 days  |
|  | IEC/EN 60721-3-3<br>IEC60068-2-60               | Flowing mixed gas; class 3C4, 25 °C/77 °F,<br>75% relative humidity, t = 7 days   |
|  | IEC60068-2-52                                   | Salt spray: test Kb, severity 2   |
|  | IEC/EN 60721-3-3<br>IEC60068-2-68               | Dust and sand, Arizona dust, class 3S4, 20 cycles   |
|  | IEC/EN 60721-3-3<br>IEC60068-2-10               | Mold growth, fungal spore, class 3B2, t=28 days   |

(1) Devices must be installed, wired, and maintained in accordance with the instructions provided in the manual "Grounding and Electromagnetic Compatibility of PLC Systems".

(2) When using fast actuators (response time  $\leq$  5 ms) driven by relay outputs: 15 g, 11 ms; 3 shocks/direction/axis.

(3) When using fast actuators (response time  $\leq$  15 ms) driven by relay outputs: 15 g, 6 ms; 100 bumps/direction/axis.

(4) Refer also to the chapter "Treatment for severe environments".

(CE): tests required by European CE directives and based on IEC/EN 61131-2 standards.

# Technical appendices

## Automation product certifications EC regulations

Some countries require certain electrical components to undergo certification by law. This certification takes the form of a certificate of conformity to the relevant standards and is issued by the official body in question. Where applicable, certified devices must be labeled accordingly. Use of electrical equipment on board merchant vessels generally implies that it has gained prior approval (i.e. certification) by certain shipping classification societies.

| Abbreviation | Certification body                            | Country                  |
|--------------|---|--------------------------|
| CSA          | Canadian Standards Association                | Canada                   |
| RCM          | Australian Communications and Media Authority | Australia, New Zealand   |
| EAC          | Eurasian conformity                           | Russia and customs union |
| UL           | Underwriters Laboratories                     | USA                      |

| Abbreviation | Classification authority                              | Country       |
|--------------|---|---------------|
| IACS         | International Association of Classification Societies | International |
| ABS          | American Bureau of Shipping                           | USA           |
| BV           | Bureau Veritas  | France        |
| DNV          | Det Norske Veritas                                    | Norway        |
| GL           | Germanischer Lloyd                                    | Germany       |
| LR           | Lloyd's Register                                      | UK            |
| RINA         | Registro Italiano Navale                              | Italy         |
| RMRS         | Russian Maritime Register of Shipping                 | Russia        |
| RRR          | Russian River Register                                | Russia        |
| CCS          | China Classification Society                          | China         |
| KRS          | Korean Register of Shipping                           | Korea         |

*Note: Due to the merger between DNV and GL certification, DNV/GL will be renewed as a single certificate from 2016.*

The following tables provide an overview of the situation as of September 2016, in terms of which certifications (listed next to their respective bodies) have been granted or are pending for our automation products.

Up-to-date information on which certifications have been obtained by products bearing the Schneider Electric brand can be viewed on our website: [www.schneider-electric.com](http://www.schneider-electric.com)

| Product certifications             |                |        |           |        |   |                  |                   |
|------------------------------------|----------------|--------|-----------|--------|---|------------------|-------------------|
| Certified<br>Certification pending | Certifications |        |           |        |   |                  |                   |
|                                    | UL             | CSA    | RCM       | EAC    | Hazardous locations (1)<br>Class I, div 2 | IEC              | IECEx             |
|                                    | USA            | Canada | Australia | Russia | USA, Canada                               | (6)              | Ex                |
| Modicon OTB                        |                |        |           |        |   |                  |                   |
| Modicon STB                        |                |        |           |        | FM  | Zone 2 (2)(5)    |                   |
| Modicon Telefast ABE 7             |                |        |           |        |   |                  |                   |
| ConneXium                          |                |        |           |        | (2)                                       |                  |                   |
| Magelis iPC/GTW                    | (3)            |        |           | (2)    | (3)                                       | Zone 2/22 (2)    |                   |
| Magelis XBT GT                     | (3)            |        |           | (2)    | (2) (3)                                   | Zone 2/22 (2)(5) |                   |
| Magelis XBT GK                     | (3)            |        |           |        | (3)                                       |                  |                   |
| Magelis XBT N/R/RT                 |                |        |           |        | CSA                                       | Zone 2/22 (2)(5) |                   |
| Magelis HMI GTO                    | (3)            |        |           | (2)    | (3)                                       | (2)              |                   |
| Magelis HMI STO/STU                | (3)            |        |           | (2)    | (2)(3)                                    | (2)              |                   |
| Modicon M340                       |                |        |           |        | CSA(8)                                    | Zone 2/22 (2)    |                   |
| Modicon M580                       |                |        |           |        | CSA(8)                                    | Zone 2/22 (2)    |                   |
| Modicon M580 Safety                |                |        |           |        | CSA(8)                                    | Zone 2/22 (2)    | SIL 3, Cat.4, PLe |
| Modicon X80 I/O                    |                |        |           |        | CSA(8)                                    | Zone 2/22 (2)    |                   |
| Modicon Momentum                   |                |        |           |        | FM  |                  |                   |
| Modicon Premium                    |                |        |           | (2)    | CSA                                       |                  |                   |
| Modicon Quantum                    |                |        |           | (2)    | CSA(8)                                    | Zone 2/22 (2)    |                   |
| Modicon Quantum Safety             |                |        |           | (2)    | CSA                                       | Zone 2/22 (2)    | SIL 2, SIL 3 (7)  |
| Preventa XPSMF                     |                |        |           |        |   |                  | SIL 3 (7)         |
| Modicon TSX Micro                  |                |        |           |        | CSA                                       |                  |                   |
| Phaseo                             | (3)            |        |           |        |   |                  |                   |
| Twido                              | (4)            | (4)    |           |        | CSA/UL (4)                                |                  |                   |

(1) Hazardous locations: According to ANSI/ISA 12.12.01 and/or CSA 22.2 No. 213, and/or FM 3611, certified products are only approved for use in hazardous locations categorized as Class I, division 2, groups A, B, C, and D, or in non-classified locations.

(2) Depends on product; please visit our website: [www.schneider-electric.com](http://www.schneider-electric.com).

(3) North American certification cULus (Canada and USA).

(4) Except for AS-Interface module TWD NOI 10M3, CE only.

(5) For zones not covered by this specification, Schneider Electric offers a solution as part of the CAPP (Collaborative Automation Partner Program). Please contact our Customer Care Center.

(6) Refer to the instructions supplied with each ATEX and/or IECEx certified product.

(7) According to IEC 61508. Certified by TÜV Rheinland for integration into a safety function of up to SIL 2 or SIL 3.

(8) CSA Hazardous Location according to ANSI/ISA 12.12.01, CSA 22.2 No. 213, and FM 3611.

# Technical appendices

## Automation product certifications EC regulations

### Merchant navy certifications

| Certified<br>Certification pending | Shipping classification societies   |        |  |       |  |       |  |        |   |  |
|------------------------------------|---|--------|--|-------|--|-------|--|--------|---|--|
|                                    |  ABS |        |  BV |       |  DNV GL |       |  KR |        |  Lloyd's Register |  |
|                                    | ABS   | BV     | DNVGL  | KRS   | LR   | RINA  | RMRS   | RRR    | CCS   |  |
| USA                                | France  | Norway | Germany  | Korea | Great Britain  | Italy | Russia   | Russia | China   |  |
| Modicon OTB                        |   |        |  |       |  |       |  |        |   |  |
| Modicon STB                        |   |        |  |       |  |       |  |        |   |  |
| Modicon Telefast ABE 7             |   |        |  |       |  |       |  |        |   |  |
| ConneXium                          |   |        |  |       |  |       |  |        |   |  |
| Magelis iPC/GTW                    |   |        |  |       |  |       |  |        |   |  |
| Magelis XBT GT                     |   |        |  |       |  |       |  |        |   |  |
| Magelis XBT GK                     |   |        |  |       |  |       |  |        |   |  |
| Magelis XBT N/R                    |   |        |  |       |  |       |  |        |   |  |
| Magelis XBT RT                     |   |        |  |       |  |       |  |        |   |  |
| Magelis HMI GTO                    |   |        |  |       |  |       |  |        |   |  |
| Magelis HMI STO/STU                |   |        |  |       |  |       |  |        |   |  |
| Modicon M340                       |   |        |  |       |  |       |  |        |   |  |
| Modicon M580                       |   |        |  |       |  |       |  |        |   |  |
| Modicon M580 Safety                |   |        |  |       |  |       |  |        |   |  |
| Modicon X80 I/O                    |   |        |  |       |  |       |  |        |   |  |
| Modicon Momentum                   |   |        |  |       |  |       |  |        |   |  |
| Modicon Premium                    |   |        |  |       |  |       |  |        |   |  |
| Modicon Quantum                    |   |        |  |       |  |       |  |        |   |  |
| Modicon TSX Micro                  |   |        |  |       |  |       |  |        |   |  |
| Phaseo                             |   |        |  |       |  |       |  |        |   |  |
| Twido                              |   |        |  |       |  |       |  |        |   |  |

### EC regulations

#### European Directives

The open nature of the European markets assumes harmonization between the regulations set by the member states of the European Union. European Directives are texts intended to remove restrictions on free circulation of goods and which must be applied within all European Union states.

Member states are obligated to incorporate each Directive into their national legislation, and to simultaneously withdraw any regulations that contradict it.

Directives - and particularly those of a technical nature with which we are concerned - merely set out the objectives to be fulfilled (referred to as "essential requirements"). Manufacturers are responsible for taking the necessary measures to establish that their products conform to the requirements of each Directive applicable to their equipment.

As a general rule, manufacturers certify compliance with the essential requirements of the Directive(s) that apply to their products by applying a CE mark. The CE mark is affixed to our products where applicable.

#### Significance of the CE mark

The CE mark on a product indicates the manufacturer's certification that the product conforms to the relevant European Directives; this is a prerequisite for placing a product that is subject to the requirements of one or more Directives on the market and allowing its free circulation within European Union countries. The CE mark is intended for use by those responsible for regulating national markets.

Where electrical equipment is concerned, conformity to standards indicates that the product is fit for use. Only a warranty by a well-known manufacturer can provide reassurance of a high level of quality.

As far as our products are concerned, one or more Directives are likely to apply in each case; in particular:

- The Low Voltage Directive (2014/35/EU)
- The Electromagnetic Compatibility Directive (2014/30/EU)
- The ATEX CE Directive (2014/34/EU)
- The Machinery Directive (2006/42/EU)

#### Hazardous substances

These products are compatible with:

- The WEEE Directive (2012/19/EU)
- The RoHS Directive (2011/65/EU)
- The China RoHS Directive (Standard GB/T 26572-2011)
- REACH regulations (EC 1907/2006)

**Note:** Documentation on sustainable development is available on our website [www.schneider-electric.com](http://www.schneider-electric.com) (product environmental profiles and instructions for use, RoHS and REACH directives).

#### End of life (WEEE)

End of life products containing electronic cards must be dealt with by specific treatment processes.

When products containing backup batteries are unusable or at end of life they must be collected and treated separately. Batteries do not contain a percentage by weight of heavy metals above the limit specified by European Directive 2013/56/EU.



---

### A dedicated services offer for your installed base

- Maintenance and support services ..... page 9/2
- Consultancy services ..... page 9/3
- Modernization solutions ..... page 9/3
- Customization services ..... page 9/3

### Index

- Product reference index ..... page 9/4

# A dedicated services offer for your installed base



Schneider Electric, with its experts, products and dedicated tools, provides services such as system design, consultancy, maintenance contracts, modernization of facilities or delivering projects.

The Schneider Electric services offer is structured around several key areas:

- Maintenance and support services:
  - A set of services to help maintain reliability and availability of automated control systems. These services may be the subject of a bespoke maintenance contract to meet your requirements more closely.
- Consultancy services:
  - Diagnostics of the installed base
- Modernization solutions:
  - Migration solutions including consultancy, expertise, tools and technical support to help ensure a smooth transition to newer technology while keeping the wiring and the encoding in most cases.

Customization services are also available to accommodate specific requirements. For more information, please consult the specific pages on our website [www.schneider-electric.com/automationservices](http://www.schneider-electric.com/automationservices)

## Maintenance and support services

### Spare parts, exchanges and repairs

*Everything you need to get equipment working again as quickly as possible*

Solutions to respond very quickly to requests for spare parts, exchanges and repairs to your installed automation equipment (automation platforms, Human Machine Interfaces, drives, distributed I/O):

- Spare parts management:
  - Identification of critical parts
  - Stock of spare parts: a Schneider Electric owned stock of spare parts, on your site or in one of our warehouses, with immediate availability on site or a contractually agreed delivery time if stored off site
  - Testing of spare parts stored on site
  - Automatic stock filling
- Repairs:
  - Broken down products are repaired in a network of worldwide repair centres. For each repaired product, our experts provide a detailed report.
- On-site repair:
  - Our experts' knowledge and expertise
  - Monitoring of specific repair procedures
  - Availability of our teams to respond 24/7
- Exchanges:
  - With standard replacements, receive a new or reconditioned product before the broken down product has even been sent back
  - Fast exchanges offer the option to receive the replacement product within 24 hours (in Europe)

### Preventive maintenance

*Improving and guaranteeing the long-term reliability and performance of your installations*

Schneider Electric's preventive maintenance expert assesses your site, the equipment to be managed and sets up a maintenance program to accommodate specific requirements. A list is provided of the tasks to be performed and their frequency, including site-specific tasks, describing how preventive maintenance is to be managed.

### Extended warranty

*An additional manufacturer warranty covering replacement or repair of the equipment*

The extended warranty offers the option to take out a 3-year warranty. The warranty period can vary according to the geographical area, consult your Customer Care Centre.

### Online support

*Access to dedicated experts*

Priority access to experts who can answer technical questions promptly concerning equipment and software both on sale and no longer commercially available.

### Software subscription

*Access to software upgrades and new features*

By subscribing to software updates, users are able to:

- Purchase licences
- Receive updates, upgrades, software migrations and transitions
- Download software from Schneider Electric's software library

## A dedicated services offer for your installed base

### Consultancy services

#### M2C (Maintenance and Modernization Consultancy)

*Professional tools and methods, proven experience of managing obsolescence and updating installed bases, to reduce downtimes and improve performance*

With our maintenance and modernization consultancy offer, Schneider Electric will help you check the state of your installed base by:

- Defining the scope and depth of the analysis in collaboration with you
- Collecting the technical data without shutting down production
- Analyzing and identifying avenues for improvement
- Producing a recommendation plan

Customer benefits:

- Learning about the components that make up the installed base and how up-to-date they are
- Better downtime anticipation
- Expert advice designed to improve performance

### Modernization solutions

#### Migration to EcoStruxure



To find out more about EcoStruxure architectures, please visit our website [www.schneider-electric.com/EcoStruxure](http://www.schneider-electric.com/EcoStruxure)

*Proven expertise, tools and methods to give you a clear vision of the improvement opportunities and guide you toward a successful modernization project*

Schneider Electric offers gradual solutions of modernization through a set of products, tools and services that allow you to upgrade your installations with our last technologies. Our solutions offer you the choice to plan your modernization:

- Partial modernization: replacement of an old set of components with a new one
- Step by Step modernization: gradual incorporation of new Solutions or Offers in the system
- Complete modernization: total renovation of the system

The table below lists our various migration offers:

| Wide range of migration offers |                              | Moving to M580/M340/X80 platform                 |   |   |                                      |                                     |                                     |                                     |
|--------------------------------|------------------------------|--|---|---|--------------------------------------|-------------------------------------|-------------------------------------|-------------------------------------|
| Solution                       |                              | Solution Type                                    |   |   | Tools                                | Solution Services                   |                                     |                                     |
| Platform                       | Premium                      | Change the CPU and retain the I/O racks & wiring | Change the CPU & the I/O racks & retain I/O field wiring with wiring system | Change the CPU & the I/O racks & the I/O wiring | SoftWare application conversion tool | Modernization / migration service   | Manage your project                 | Execute your project                |
|                                | TSX47 to TSX107              | <input checked="" type="checkbox"/>              | <input checked="" type="checkbox"/>   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Quantum                      | <input checked="" type="checkbox"/>              |   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Modicon 984 & 800 Series I/O | <input checked="" type="checkbox"/>              | <input checked="" type="checkbox"/>   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Modicon Compact              |  | <input checked="" type="checkbox"/>   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Symax                        | <input checked="" type="checkbox"/>              | (1)   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | April series 1000            |  | (2)   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | April SMC                    |  |   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Merlin Gerin PB              |  |   | <input checked="" type="checkbox"/>             |                                      | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | AEG                          |  | (1)   | <input checked="" type="checkbox"/>             |                                      | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Rockwell SLC500              |  |   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |
|                                | Rockwell PLC 5               | <input checked="" type="checkbox"/>              | (1)   | <input checked="" type="checkbox"/>             | <input checked="" type="checkbox"/>  | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> | <input checked="" type="checkbox"/> |



Service available

(1) Consult Schneider services - project specific solution is possible  
(2) For April series 1000 (April 5000-7000 also the April 2000-3000)  
Consult Schneider services - project specific solution is possible

### Customization services

Schneider Electric is able to meet your specific requirements and provide you with adapted products:

- Protective coating for Human Machine Interfaces, automation platforms and distributed I/O modules for use in harsh environments
- Customized cable lengths to match your specific needs
- Customized front panels for Human Machine Interfaces

*Note: To check availability of services required, please contact our Customer Care Centre.*

| A            | BMXCP4002S | 4/5  | BMXFCA302    | 3/23 | BMXFTW308S   | 3/23 | PMXNOW0300     | 5/25 |
|--------------|------------|------|--------------|------|--------------|------|----------------|------|
| ABE7CPA02    | 3/23       |      | BMXFCA4022   | 2/11 | BMXFTW501    | 3/13 | S              |      |
| ABE7CPA03    | 3/23       |      | BMXCP4022H   | 6/3  | BMXFTW501S   | 3/23 | STBXSP3010     | 2/5  |
| ABE7CPA21    | 3/23       |      | BMXCP4022S   | 4/5  | BMXFTW508S   | 3/23 |                | 6/4  |
| ABE7CPA31    | 3/23       |      | BMXCRA31210C | 6/10 | BMXFTW1001   | 3/13 | STBXSP3020     | 2/5  |
| ABE7CPA31E   | 3/23       |      | BMXDAI0805   | 3/12 | BMXGEL0025   | 6/4  |                | 6/4  |
| ABE7CPA410   | 3/23       | 6/8  | BMXDAI0814   | 3/12 | BMXMSP0200   | 3/37 |                |      |
| ABE7CPA412   | 3/23       | 6/8  | BMXDAI1602   | 3/12 | BMXNGD0100   | 5/15 |                |      |
| ASITERV2     | 5/17       |      | BMXDAI1602H  | 6/6  | BMXNOE0100H  | 6/9  | T              |      |
| B            | BMXDAI1604 | 3/12 | BMXDAI1604H  | 6/6  | BMXNOE0110H  | 6/9  | TCSEGPA23F14FK | 6/10 |
| BMEAHI0812   | 3/27       |      | BMXDAI1614   | 3/12 | BMXNOM0200   | 5/19 | TCSMCN3M4F3C2  | 5/19 |
| BMEAHO0412   | 3/27       |      | BMXDAI1614H  | 6/6  | BMXNOM0200H  | 6/9  | TCSMCN3M4M3S2  | 5/19 |
| BMECRA31210  | 5/3        |      | BMXDAI1615   | 3/12 | BMXNOR0200H  | 5/13 |                | 6/10 |
| BMECRA31210C | 6/10       |      | BMXDAI1615H  | 6/6  | BMXNRP0200   | 5/5  | TCSXCN3M4F3S4  | 5/19 |
| BMECXM0100   | 5/21       |      | BMXDAO1605   | 3/12 | BMXNRP0201   | 5/5  |                | 6/10 |
| BMECXM0100H  | 6/9        |      | BMXDAO1605H  | 6/6  | BMXPRA0100   | 5/7  | TSXCBY010K     | 2/9  |
| BMENOC0301C  | 6/10       |      | BMXDAO1615   | 3/12 | BMXRWS128MWF | 5/13 |                | 6/5  |
| BMENOC0311C  | 6/10       |      | BMXDAO1615H  | 6/6  | BMXRWSC016M  | 5/15 | TSXCBY030K     | 2/9  |
| BMENOC0321C  | 6/10       |      | BMXDDI1602   | 3/12 | BMXSAI0410   | 4/9  |                | 6/5  |
| BMENOP0300   | 5/23       |      | BMXDDI1602H  | 6/6  | BMXSDI1602   | 4/8  | TSXCBY120K     | 2/9  |
| BMENOP0300C  | 6/10       |      | BMXDDI1603   | 3/12 | BMXSDO0802   | 4/8  |                | 6/5  |
| BMENOS0300   | 5/5        |      | BMXDDI1603H  | 6/6  | BMXSRA0405   | 4/8  | TSXCBY180K     | 2/9  |
| BMENOS0300C  | 6/10       |      | BMXDDI1604T  | 3/12 | BMXXBC008K   | 2/9  |                | 6/5  |
| BMEXPB0400   | 2/4        |      | BMXDDI3202K  | 3/12 | BMXXBC015K   | 2/9  | TSXCBY280KT    | 2/9  |
| BMEXPB0400H  | 6/4        |      | BMXDDI6402K  | 3/12 | BMXXBC030K   | 2/9  |                | 6/5  |
| BMEXPB0602   | 2/4        |      | BMXDDM3202K  | 3/13 | BMXXBC050K   | 2/9  | TSXCBY1000     | 2/9  |
| BMEXPB0602H  | 6/4        |      | BMXDDM16022  | 3/13 | BMXXBC120K   | 2/9  |                | 6/5  |
| BMEXPB0800   | 2/4        |      | BMXDDM16022H | 6/6  | BMXXBE1000   | 2/9  | TSXCBYACC10    | 2/9  |
| BMEXPB0800H  | 6/4        |      | BMXDDM16025  | 3/13 | BMXXBE1000H  | 6/4  |                | 6/5  |
| BMEXPB1002   | 2/4        |      | BMXDDM16025H | 6/6  | BMXXBE2005   | 2/9  | TSXCBYK9       | 2/9  |
| BMEXPB1002H  | 6/4        |      | BMXDDO1602   | 3/12 | BMXXBP0400   | 2/4  |                | 6/5  |
| BMEXPB1200   | 2/4        |      | BMXDDO1602H  | 6/6  | BMXXBP0400H  | 6/4  | TSXTLYEX       | 2/9  |
| BMEXPB1200H  | 6/4        |      | BMXDDO1612   | 3/12 | BMXXBP0600   | 2/4  |                | 6/5  |
| BMXAMI0410   | 3/22       |      | BMXDDO1612H  | 6/6  | BMXXBP0600H  | 6/4  | V              |      |
| BMXAMI0410H  | 6/7        |      | BMXDDO3202K  | 3/12 | BMXXBP1200   | 2/4  | VW3M8223R30    | 3/37 |
| BMXAMI0800   | 3/22       |      | BMXDDO6402K  | 3/12 | BMXXBP1200H  | 6/4  |                |      |
| BMXAMI0810   | 3/22       |      | BMXDRA0804T  | 3/12 | BMXXEM010    | 2/5  |                |      |
| BMXAMI0810H  | 6/7        |      | BMXDRA0805   | 3/12 | BMXXSP0400   | 2/5  |                |      |
| BMXAMM0600   | 3/22       |      | BMXDRA0805H  | 6/6  | BMXXSP0600   | 2/5  |                |      |
| BMXAMM0600H  | 6/7        |      | BMXDRA0815   | 3/12 | BMXXSP0800   | 2/5  |                |      |
| BMXAMO0210   | 3/22       |      | BMXDRA0210H  | 6/7  | BMXXSP0800H  | 6/4  |                |      |
| BMXAMO0210H  | 6/7        |      | BMXDRA0815H  | 6/6  | BMXXBP1200   | 2/4  |                |      |
| BMXAMO0410   | 3/22       |      | BMXDRA1605   | 3/12 | BMXXBP1200H  | 6/4  |                |      |
| BMXAMO0410H  | 6/7        |      | BMXDRA1605H  | 6/6  | BMXXEM010    | 2/5  |                |      |
| BMXAMO0802   | 3/22       |      | BMXDRC0805   | 3/12 | BMXXSP0400   | 2/5  |                |      |
| BMXART0414   | 3/22       |      | BMXDRC0805H  | 6/6  | BMXXSP0600   | 2/5  |                |      |
| BMXART0414H  | 6/7        |      | BMXEAE0300   | 3/35 | BMXXSP0800   | 2/5  |                |      |
| BMXART0814   | 3/22       |      | BMXEAE0300H  | 6/11 | BMXXSP1200   | 2/5  |                |      |
| BMXART0814H  | 6/7        |      | BMXEHC0200   | 3/31 | BMXXTSCPS10  | 2/11 |                |      |
| BMXCPS2000   | 2/11       |      | BMXEHC0200H  | 6/11 | BMXFTB4000   | 3/13 |                |      |
| BMXCPS2010   | 2/11       |      | BMXEHC0800   | 3/31 | BMXFTB4000H  | 6/6  |                |      |
| BMXCPS3020   | 2/11       |      | BMXEHC0800H  | 6/11 | BMXFTB4020   | 3/13 |                |      |
| BMXCPS3020H  | 6/3        |      | BMXEIA0100   | 5/17 | BMXFTB4020H  | 6/6  |                |      |
| BMXCPS3500   | 2/11       |      | BMXERT1604T  | 3/33 | BMXFTB301    | 3/13 |                |      |
| BMXCPS3500H  | 6/3        |      | BMXETM0200H  | 3/41 | BMXFTW301S   | 3/23 |                |      |
| BMXCPS3522   | 2/11       |      | BMXFTW308S   | 6/11 | BMXFTW308S   | 6/8  | P              |      |
| BMXCPS3522H  | 6/3        |      | BMXFCA150    | 3/23 | BMXFTW501    | 3/13 | PMESWT0100     | 3/43 |
| BMXCPS3522S  | 4/5        |      | BMXFCA152    | 3/23 | BMXFTW501S   | 6/6  |                |      |
| BMXCPS3540T  | 2/11       |      | BMXFCA300    | 3/23 | BMXFTW508S   | 3/23 |                |      |
| BMXCPS4002   | 2/11       |      | BMXFCA300H   | 6/8  | BMXFTW1001   | 3/13 |                |      |
| BMXCPS4002H  | 6/3        |      |              |      |              |      |                |      |



[www.schneider-electric.com/psx](http://www.schneider-electric.com/psx)

**Schneider Electric Industries SAS**

Head Office  
35, rue Joseph Monier  
F-92500 Rueil-Malmaison  
France

The information provided in this documentation contains general descriptions and/or technical characteristics of the performance of the products contained herein. This documentation is not intended as a substitute for and is not to be used for determining suitability or reliability of these products for specific user applications. It is the duty of any such user or integrator to perform the appropriate and complete risk analysis, evaluation and testing of the products with respect to the relevant specific application or use thereof. Neither Schneider Electric nor any of its affiliates or subsidiaries shall be responsible or liable for misuse of the information contained herein.

Design: Schneider Electric  
Photos: Schneider Electric